




Catalog Number 73514
UPC Number 60198673514
Description Standard with Self Diagnostic Exit Sign
LED
Green Letters White Housing

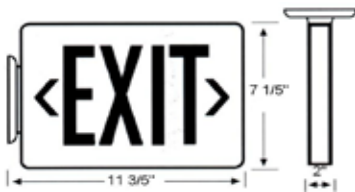

Features

- Self DiagnosticTest Feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical & Life Safety Codes
- Superior Quality Exit Unit Combined with LED Energy Saving Technology
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Design in Neutral Finish
- Push to Test Switch in Battery Backup Units
- Automatic, Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Injection-Molded, UL 94 V-0 Flame Retardant, High Impact Housing
- Charge Rate/Power On LED Indicator Light
- LED Life Expectancy of 50,000+ Hours
- Energy Consumption of Less than 2 Watts for Green Letters
- Listed for Damp Location
- Universal Mounting Canopy & 2 Face Plates for Side or Top Installation
- Standard AC and Emergency Units Available
- 900MAH 1.2V Ni-CAD Battery - Unitech AA 900mAh 1.2V or Equal
- 90 Minute Battery Run Time

Dimension Information

L Inches	12.00
H Inches	7.50
Depth Inches (mm)	1.50

Specifications

Input Rating Amps:	18.1 mA @120V, 7.76 mA @ 277V
Input Rating Watts:	1.64W @ 120V 1.60W @ 277V
Frequency:	60 Hz
Voltage Rating:	120/277
Flammability Rating:	UL94V-0
Battery Operation:	1.2 Volt 900 mAh Ni-Cad - 90 Minutes Min

Packaging

Box Qty	1
Master Carton Qty	6

Certifications

UL	UL 924
cUL	No
RoHS	Yes

Warranty

Five Years