




73538 - COMBO EXIT EMERGENCY LIGHT

REMOTE CAPABLE WITH SELF DIAGNOSTIC
GREEN LETTERS, GREEN LEDs, WHITE HOUSING

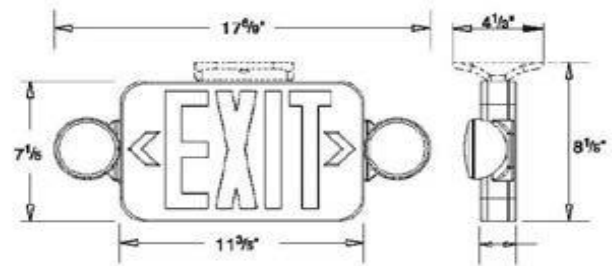

FEATURES:

- Long Life Energy Saving LED Legend & Lamps
- Completely Self-Contained
- Fully Automatic Operation
- Push to Test Switch
- Automatic Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of Less than 2 Watts for Green Letters
- Injection-Molded, UL 94 V-O Flame Retardant, High Impact, Thermoplastic Housing
- Fully Adjustable Glare-Free LED Lamps
- CAUTION: Use Only LED Remote Lamp Heads with Remote Capable Units
- Damp Location Rated
- UL924 Listed
- Heads Rotate for Maximum Field Flexibility
- Universal Mounting Canopy for Top or Back J-box Installation & 2 Snap-fit Face Plates
- Field replaceable chevron directional indicators
- Integral wiring channels to facilitate installation
- 3.6-Volt Sealed Ni-Cad Rechargeable Maintenance-Free Battery
- Environmentally-Coated, Solid State Charger
- High Output Remote Capable with Self Diagnostics (76 Lumens Per Head)
- Remote Capability for up to 2 Additional Standard Remote Lighting Fixtures:
 - 2 heads - 4 hours operation
 - 3 heads - 2 hours operation
 - 4 heads - 1.5 hours operation
- 5 Year Warranty

CAT NO.	TYPE	VOLTAGE	LED COLOR	CCT	HOUSING	BATTERY	LUMENS PER HEAD
73538	High Output, Remote Capable, Self Diagnostic	120/277	Green	5000K	White	Ni-Cad	76



73538 - COMBO EXIT EMERGENCY LIGHT

REMOTE CAPABLE WITH SELF DIAGNOSTIC
GREEN LETTERS, WHITE HOUSING

Technical Specifications:

Electrical:

Input Voltage: 120/277V

Product Parameters:

Lumens: 76 per head

Battery: 3.6-Volt Sealed Ni-

Cad Rechargeable

Maintenance-Free Battery

LED Color: Green

Operating Temperature:

Minimum Starting -4°F to 122°F

Construction:

Housing: Flame Retardant, UV-Stabilized High Impact Housing

Mounting:

EZ-snap mounting canopy included for top or end mount

Universal knockout pattern on back plate for wall mount

Listings:

UL Listed 924 for wet locations

Carton Qty: 1

Warranty:

Morris Products carries a 3 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).