





74005C - LED AREA LIGHT SHOEBOX GEN 4


120- 20- 277V 60/80/100W 5000K

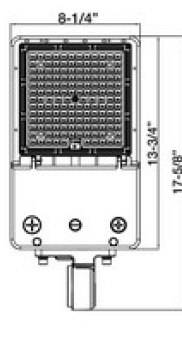

Adapter
Included with fixture

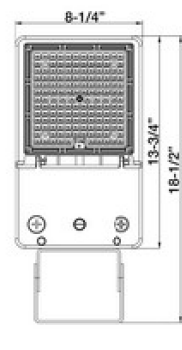

Trunnion
Sold Separately



Yoke
Sold Separately

60-100W

FEATURES:

- SMD 3030 LEDs
- Wattage Selectable
- Corrosion resistant Die Cast Aluminum housing
- Polycarbonate Optic Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Photo Control must be Purchased Separately
- Light Pattern: Type IV
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC PRODUCT ID#: P5GFC53T
- 5 Year Warranty





Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/ Watt	DLC PRODUCT ID#:
74005C	White	60/80/100W	13,840 @80W	5000K	120-277V	127°	138m/w	PM16Z9QC



74005C - LED AREA LIGHT SHOEBOX GEN 4

120- 20- 277V 60/80/100W 5000K

PHOTOMETRY:

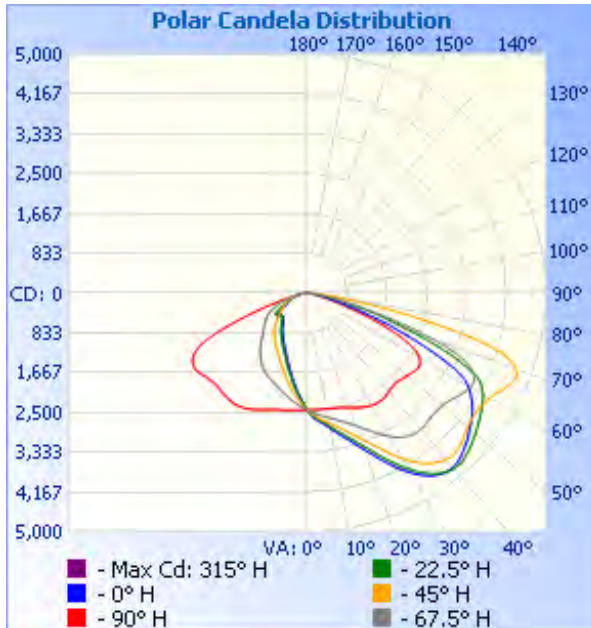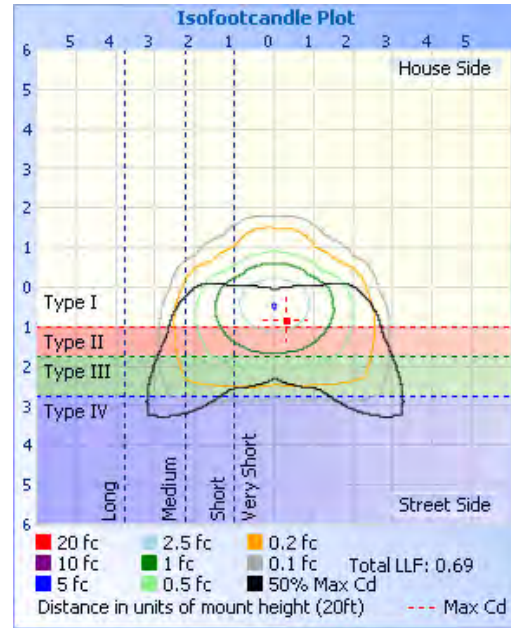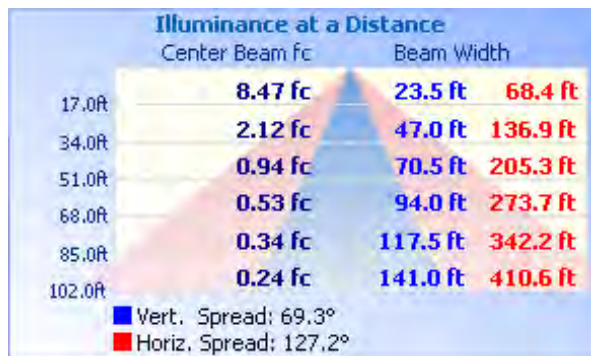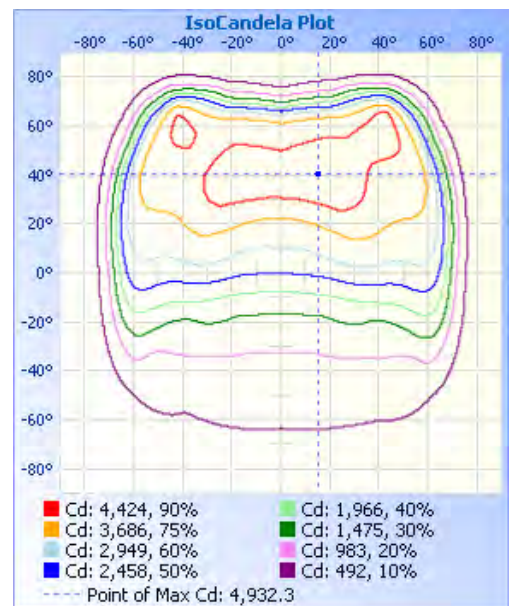



74005C - LED AREA LIGHT SHOEBOX GEN 4

120- 20- 277V 60/80/100W 5000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: .32A @ 277V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 12.3% @ 277V

Product Parameters:

60/80/100W Watts

Efficacy: 137 lumens per watt

50,000+ LED Life Span

CCT: 5000K

Chromaticity Measurements:

Beam Angle: 127°

CRI: 72

R9: -33

DUV: 0.0020

Chromaticity (x,y): x=0.4375; y= 0.4040

Chromaticity (u,v): u=0.2510; v= 0.5214

Component Specifications:

LED: SMD3030

Driver Voltage: 120-277V

Frequency: 50-60HZ

Dimming: 0-10V

***Photo Control:**

Twist lock receptacle and shorting included.

Photocell sold separately.

LED Twist-Lock Style Photocells: **39106** (120-277V)

LED Twist-Lock Style Photocells: **39107** (480V)

*Twist lock receptacle is installed on fixture and shorting cap is include in the box

Operating Temperature:

Minimum Starting: -22°F To 122°F

Construction:

Housing: Corrosion resistant Die Cast Aluminum housing

IP Rating: IP65 Wet Location Rated

Lens Material: Polycarbonate

Mounting Accessories Sold Separately

Listing:

cULus

DLC PRODUCT ID#: PM16Z9QC

Accessories (Sold Separately):

- Pole Arm Mount (80-300W) White - For Round and Square Poles - CAT#: 74033A
- Slipfitter Mount (80-300W) White - CAT#: 74035A
- Trunnion Mount (80-300W) White - CAT#: 74039C
- Universal Mount (80-300W) White - CAT#: 74044A
- Yoke Mount (60-100W) White - CAT#: 74734C
- Microwave Motion Sensor (**120-277V and 480V Only**) - CAT#: 74072C
- Microwave Motion Sensor Remote (Optional, for use with 74072C) -CAT#: 74188B

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).