




74048A - GEN 3 AREA LIGHT

100W 5000K 277-480V

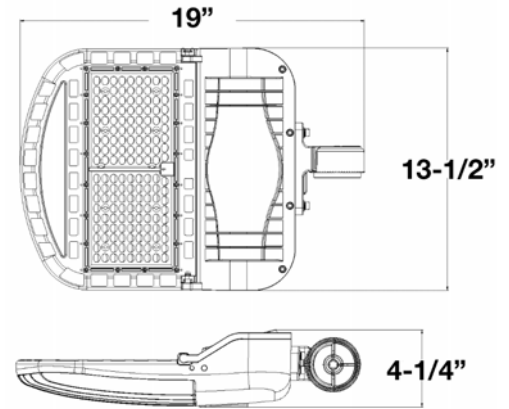



FEATURES:

- Bronze Diecast Aluminum Housing
- Heat Resistant Directed Optics
- Frosted Polycarbonate Lens, Excellent Heat Dissipation
- Maximum Life Expectancy 50,000+ hours
- Seoul 3030 LEDs

Note: Fixture does not include mount - Pole Arm, Slipfitter, Trunnion, Yoke, and Universal Mounts sold separately

CAT NO.	HOUSING COLOR	WATTAGE	CCT	LUMENS	VOLTAGE	LIGHT PATTERN	CRI	METAL HALIDE EQUAL
74048A	BRONZE	100W	5000K	13,329	277-480V	TYPE III	>75	250W

PHOTOMETRY

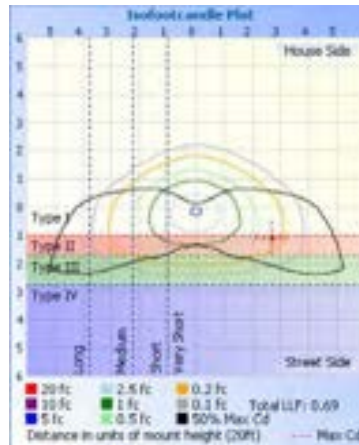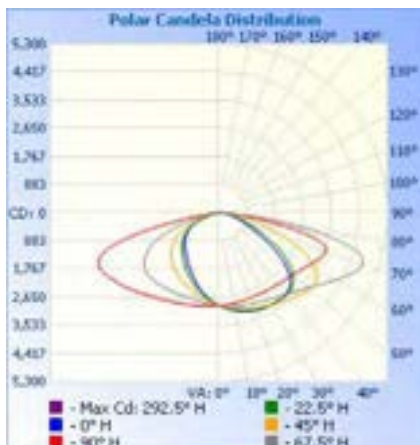



74048A - GEN 3 AREA LIGHT

100W 5000K 277-480V

ADDITIONAL TECHNICAL SPECIFICATIONS:

Voltage	L70	Current	PF	THD	R9	DUV	Chromati city (x,y)	Chromati city (u,v)	Driver Output (Volts)	Driver Output (Amps)	BUG Rating	Surge Protection
277-480	>50k hrs	0.377- 0.224	0.991- 0.952	8.78%- 7.04%	0	0.0017	x=0.390 y=0.386	u=0.227 v=0.507	43V	2.1A	G2	10kV

Component Specification:

LED: Seoul 3030

Operating Temperature:

Minimum Starting -40°F - 122°F

Construction:

Housing: Aluminum Alloy, Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Polycarbonate - Heat, UV and Fire Resistant

Mounting:

2 Pc Mount Design for simple 1 person installation

*Photo Control:

Twist lock receptacle and shorting included.

Photocell sold separately.

LED Twist-Lock Style Photocells: 39106 (120-277V)

LED Twist-Lock Style Photocells: 39107 (480V)

**Twist lock receptacle is installed on fixture an shorting cap is include in the box.

Listings:

UL Listed: E474299

DLC Premium

Carton Qty: 1

Weight: 10.4 lbs.

EPA Rating: 0.8ft²

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Accessories:

Pole Arm Mount:

Slipfitter Mount:

Yoke Mount:

Trunnion Mount

Universal Mount:

Motion Sensor with cover:

BRONZE:

Cat# 74032A

Cat# 74034A

Cat# 74036A

Cat# 74038A

Cat# 74043A

Cat# 74072A

WHITE:

Cat# 74033A

Cat# 74035A

Cat# 74037A

Cat# 74039A

Cat# 74044A

Cat# N/A