




Area Light Gen 3

200W

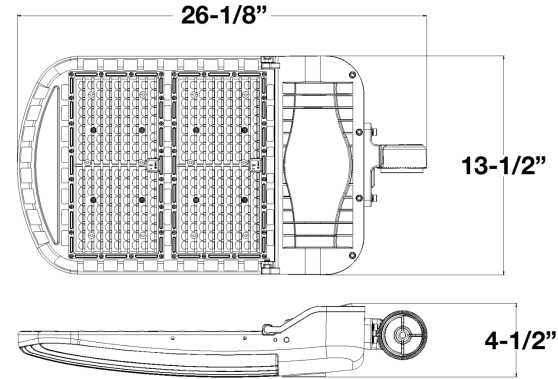

Features:

Bronze Diecast Aluminum Housing Heat Resistant Directed Optics
 Frosted Polycarbonate Lens Excellent Heat Dissipation - Maximum
 Life Expectancy
 Seoul 3030 LEDs

Note: Fixture does not include mount - Pole Arm, Slipfitter, Trunnion,
 Yoke, and Universal Mounts sold separately

Part#	Wattage	Volts	Housing Color	Light Pattern	Lumens	CCT	CRI	Dimming	Lumens/Watt	DLC Product ID# Area Light	DLC Product ID# Flood Light
74056A	200	120-277	Bronze	Type III	26200	5000	75.2	0-10V/PWM/VR	131.3	PL4MLG4Z00MJ	PLQ25REMCA5Y
74057A	200	347-480	Bronze	Type III	26143	5000	75.2	0-10V/PWM/VR	133.3	PLSHH29HSJT8	PLO5MRWH2S4D
74062A	200	120-277	White	Type III	26200	5000	75.2	0-10V/PWM/VR	131.3	PL4MLG4Z00MJ	PLQ25REMCA5Y
74063A	200	120-277	Bronze	Type III	25846	4000K	75.2	0-10V/PWM/VR	129.7	PLLQ5G1YZH45	PLSIPTTG7I82
74058A	200	120-277	Bronze	Type IV	25843	5000	75.2	0-10V/PWM/VR	130.0	PLICVVAF9ZCK	PLVQVJMGPP2F
74059A	200	347-480	Bronze	Type IV	26063	5000	75.2	0-10V/PWM/VR	132.4	PL5FF10P8G7C	PLEV9DWTM7K0
74064A	200	120-277	Bronze	Type IV	25552	4000	75.7	0-10V/PWM/VR	128.5	PLUEDSXG90PH	PLXJ6IX0IIEEX
74060A	200	120-277	Bronze	Type V	26143	5000	75.2	0-10V/PWM/VR	131.3	PLEBKL07ONUUI	PLIAA6UQ8MIW
74061A	200	347-480	Bronze	Type V	25483	5000	75.2	0-10V/PWM/VR	130.3	PLHHKURWZO6Z	PL1L1I6V7D2Y
74065A	200	120-277	Bronze	Type V	25833	4000	76.1	0-10V/PWM/VR	129.8	PL6ESV09MV5Z	PL14XTHKA2DA




Area Light Gen 3

200W

Photometrics:


TYPE III:

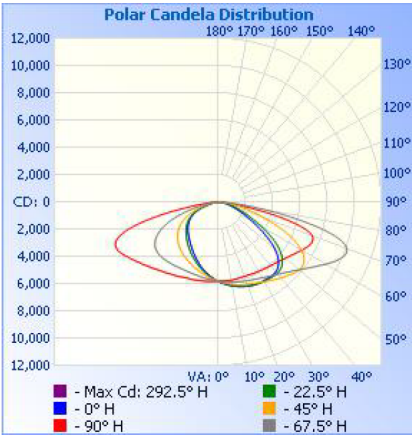


Illuminance at a Distance

	Center Beam fc	Beam Width	
17.0ft	20.1 fc	37.9 ft	104.6 ft
34.0ft	5.03 fc	75.7 ft	209.3 ft
51.0ft	2.23 fc	113.6 ft	313.9 ft
68.0ft	1.26 fc	151.4 ft	418.5 ft
85.0ft	0.80 fc	189.3 ft	523.1 ft
102.0ft	0.56 fc	227.2 ft	627.8 ft

■ Vert. Spread: 96.1°
■ Horiz. Spread: 144.0°

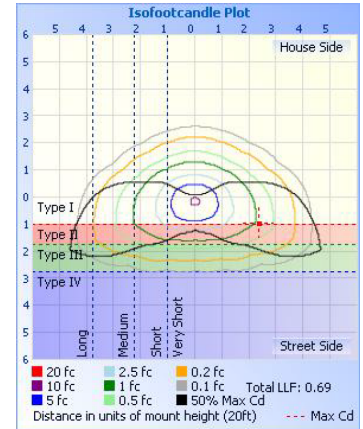


TYPE IV:

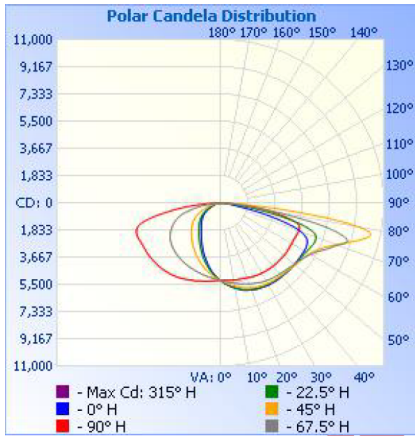


Illuminance at a Distance

	Center Beam fc	Beam Width	
17.0ft	18.1 fc	34.8 ft	17.6 ft
34.0ft	4.53 fc	69.5 ft	35.2 ft
51.0ft	2.01 fc	104.3 ft	52.8 ft
68.0ft	1.13 fc	139.1 ft	70.5 ft
85.0ft	0.72 fc	173.8 ft	88.1 ft
102.0ft	0.50 fc	208.6 ft	105.7 ft

■ Vert. Spread: 91.3°
■ Horiz. Spread: 54.8°

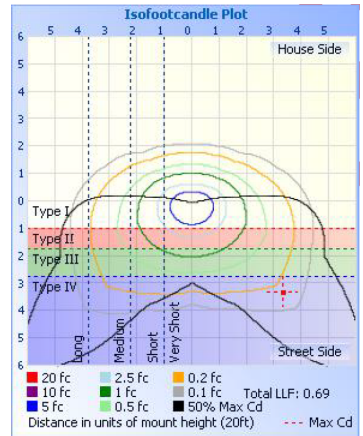


TYPE V:

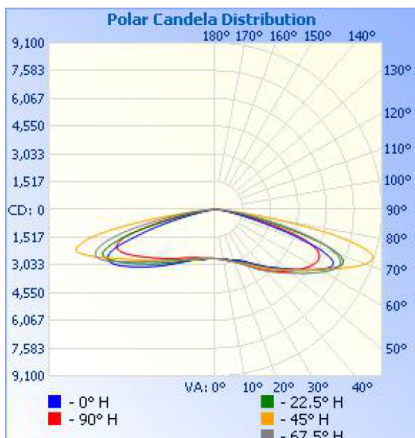

Illuminance at a Distance

	Center Beam fc	Beam Width	
17.0ft	6.90 fc	143.8 ft	60.9 ft
34.0ft	1.72 fc	287.5 ft	121.7 ft
51.0ft	0.77 fc	431.3 ft	182.6 ft
68.0ft	0.43 fc	575.1 ft	243.5 ft
85.0ft	0.28 fc	718.9 ft	304.4 ft
102.0ft	0.19 fc	862.6 ft	365.2 ft

■ Vert. Spread: 153.4°
■ Horiz. Spread: 121.6°

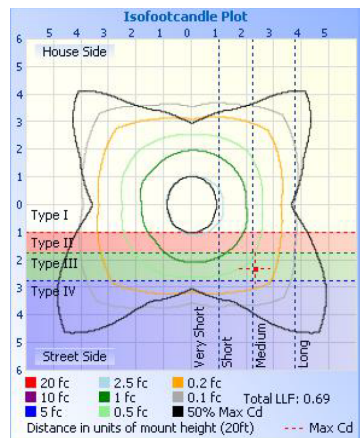



Area Light Gen 3

200W

Additional Technical Specifications:

Voltage	L70	Current	PF	THD	R9	DUV	Chromati city (x,y)	Chromati city (u,v)	Driver Output (Volts)	Driver Output (Amps)	BUG Rating	Surge Protection
120-277	>50k hrs	1.6668- 0.7560	0.996- 0.917	6.73%- 12.06%	0	0.00147	x=0.3895 y=0.3854	u=0.2276 v=0.5067	43V	4.2A	G2	10kV
277-480	>50k hrs	0.7130- 0.4372	0.992- 0.932	1.99%- 7.12%	0	0.00049	x=0.3867 y=0.3816	u=0.2272 v=0.5046	43V	4.2A	G2	10kV

Component Specification:

LED: Seoul 3030

Operating Temperature:

Minimum Starting -40°F - 122°F

Construction:

Housing: Aluminum Alloy, Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Polycarbonate - Heat, UV and Fire Resistant

Mounting:

2 Pc Mount Design for simple 1 person installation

Photo Control:

Twist lock receptacle and shorting included.

Photocell sold separately.

Listings:

UL Listed: E474299

Carton Qty: 1

Weight: 18.7 lbs.

EPA Rating: 1.44ft²

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Accessories:

Pole Arm Mount:

Slipfitter Mount:

Yoke Mount:

Trunnion Mount

Universal Mount:

Motion Sensor with cover:

BRONZE:

Cat# 74032A

Cat# 74034A

Cat# 74036A

Cat# 74038A

Cat# 74043A

Cat# 74072A

WHITE:

Cat# 74033A

Cat# 74035A

Cat# 74037A

Cat# 74039A

Cat# 74044A

Cat# N/A