
| | |
|---|---|
| **Catalog Number** | See Table |
| **UPC Number** | |
| **Description** | Copper Split Bolt - HexHead<br>#8 Thru 750 MCM<br>UL467 DB Listed |



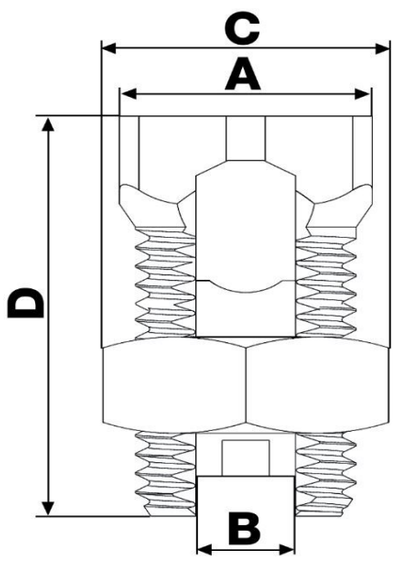


## Features

- Manufactured from High Strength High Conductivity Electrlytic Copper Alloy to Ensure Both Maximum Strength and Conductivity
- Rated for Copper Conductors Only
- Connectors are Re-Usable
- Rated 600V: 194°F (90°C)
- UL486 UL 486A-486B & CSA C22.2 No. 65-13
- UL 467 Listed for Direct Burial and Grounding/Bonding

## General

| | |
|---|---|
| Conductor Size: | #8 to 750 MCM |
| Material: | Body: High Strength Elecrolytic Copper<br>Nut and Spacer: Copper Alloy |

## Dimension Information

| | |
|---|---|
| Stock Thickness: | See Table |

## Specifications

| | |
|---|---|
| Temperature Rating: | 90°C |
| Voltage Rating: | 600 |
| Flammability Rating: | N/A |
| Amp Rating: | To Conductor |

## Packaging

| | |
|---|---|
| Box Qty: | See Table |

## Certifications

| | |
|---|---|
| UL | UL 467 Listed For Direct Burial |
| CSA | Yes |
| RoHS | N/A |

DIMENSIONS = INCHES

| CAT. NO. | AWG | MAX RUN TO MAX TAP | MIN RUN TO MIN. TAP | MAX RUN TO MIN TAP | MIN EQUAL TAP & RUN | TORQUE IN LB | A | B | C | D | BOX QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 90301 | 8 | 8-8 | 16-16 | 8-16 | 16-16 | 80 | .472 | .145 | .582 | .954 | 100 |
| 90302 | 6 | 6-6 | 10-16 | 6-16 | 10-10 | 165 | .492 | .185 | .625 | .908 | 100 |
| 90303 | 4 | 4-4 | 8-16 | 4-16 | 8-8 | 165 | .709 | .268 | .812 | 1.16 | 50 |
| 90304 | 3 | 2-2 | 4-8 | 2-8 | 4-4 | 275 | .800 | .280 | .750 | 1.50 | 50 |
| 90305 | 2 | 2-2 | 6-14 | 2-14 | 6-6 | 275 | .748 | .328 | .812 | 1.26 | 50 |
| 90306 | 1/0 | 1/0-1/0 | 4-14 | 1/0-14 | 4-4 | 385 | .787 | .374 | .937 | 1.54 | 50 |
| 90307 | 2/0 | 2/0-2/0 | 2-14 | 2/0-14 | 2-2 | 385 | .866 | .421 | 1.06 | 1.69 | 25 |
| 90308 | 3/0 | 3/0-3/0 | 2-8 | 3/0-8 | 2-2 | 500 | 1.10 | .531 | 1.25 | 2.09 | 25 |
| 90309 | 4/0-250 | 250-250 | 1/0-8 | 250-8 | 1/0-1/0 | 650 | 1.10 | .579 | 1.25 | 2.09 | 25 |
| 90310 | 350 | 350-350 | 4/0-1/0 | 350-1/0 | 4/0-4/0 | 650 | 1.22 | .700 | 1.50 | 2.36 | 12 |
| 90311 | 500 | 500-500 | 250-2/0 | 500-2/0 | 250-250 | 925 | 1.34 | .915 | 1.75 | 2.94 | 12 |
| 90312 | 750 | 750-750 | 350-4/0 | 750-4/0 | 350-350 | 1000 | 1.94 | 1.02 | 2.31 | 3.51 | 1 |
| 90313 | 1000 | 1000-1000 | 500-4/0 | 1000-4/0 | 500-500 | 1100 | 2.19 | 1.17 | 2.56 | 3.90 | 1 |