Catalog Number See Table
UPC Number See Table
Description Split Bolt Connector - Tin Plated Copper w/Spacer




Features

- Manufactured from High Strength High Conductivity Electrolytic Copper Bronze Nut
- Electro Tin Plated
- Copper and Copperweld stranded wire
- Free running thread, Easy Grip Hex Nut
- Ribbed separator for excellent pullout force reisistance
- Secure connection for all wire combinations in range

General

Wire Range:	#8 Str thru 500 MCM
Material:	High conductivity electrolytic copper
Nut Material:	Bronze
Wire Combinations:	See Table



Dimensional Information

See Table

Specifications

Temperature Rating:	N/A
Voltage Rating:	600
Flammability Rating:	N/A
Amp Rating:	To Conductor

Packaging


Box Qty	See Table

Certifications

UL	Yes
cUL	Yes
RoHS	Yes

Cat No.	AWG	Max Run To Max Tap	Min Run To Min Tap	Max Run To Min Tap	Min Equal Tap & Run	Torque In-Lb	B	C	H	L	R	V	W	Box Qty
90360	3/0	3/0-3/0	2/0-8	3/0-8	1-1	500	1.1	1.25	1.52	2.2	0.976	0.531	1.45	25
90362	4/0-250	250-250	4/0-8	250-8	1-1	500	1.1	1.25	1.574	2.22	1.06	0.579	1.45	25
90364	350	350-350	350-1/0	350-1/0	2/0-2/0	650	1.22	1.5	1.771	2.56	1.18	0.7	1.73	12
90366	500	500-500	500-2/0	500-2/0	300-300	825	1.34	1.75	1.968	2.95	1.34	0.815	2.1	12

COD:	1858

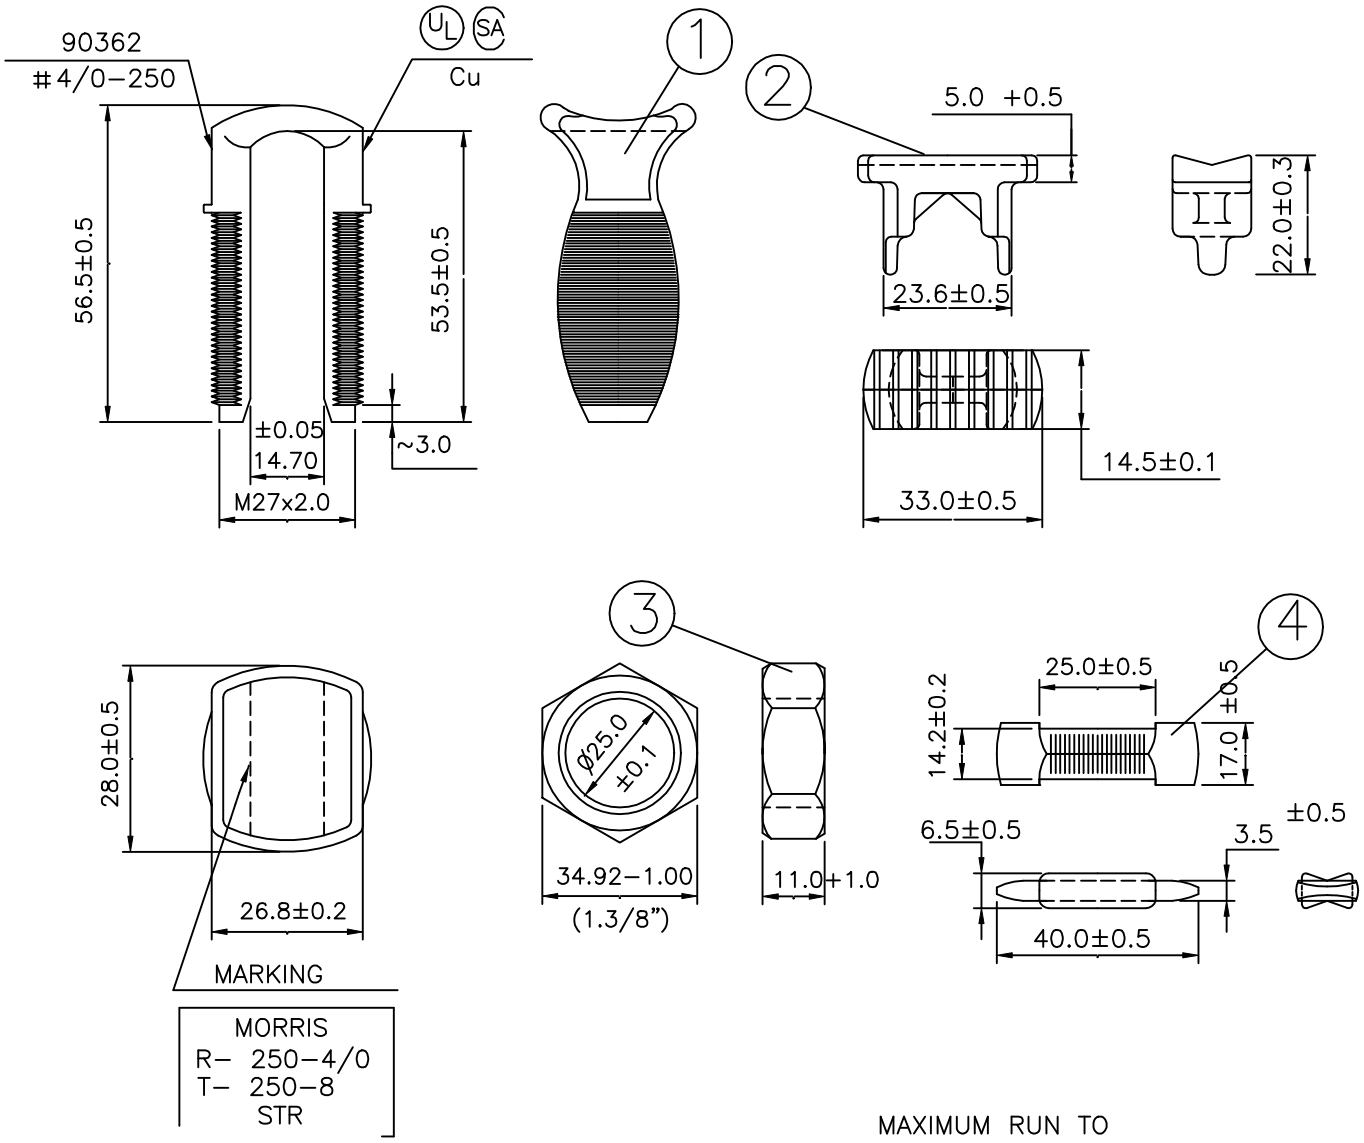

1– TORQUE: 7.48 kgf.m
2– PULL OUT: 226.81 kgf
3– FINISHING: TIN PLATED
4– Dimensions in mm.

REF.: **MORRIS PRODUCTS INC.**
CÓD. 90362

MAXIMUM RUN TO
MAXIMUN TAP: 250–250 STR

MINIMUM RUN TO
MINIMUM TAP: 4/0–8 STR AL Cu

MAXIMUM RUN TO
MINIMUM TAP: 250–8 STR AL Cu

MINIMUM EQUAL
RUN–TAP: 1–1 STR AL Cu

Nº	DENOMINATION	MATERIAL	P.L.	P.B.
4	SPACER	ELECTROLYTICAL COPPER		
3	NUT	BRONZE		
2	RIDER	BRONZE		
1	BODY	ELECTROLYTICAL COPPER		

No		Date
03		20/10/03
02		21/10/02
01		28/05/01

Revisions

Morris Products Inc.
53 Carey Rd.
Queensbury, NY 12804

		Date	No
		23/08/99	90362
Appv'l		08/09/99	01 DE: 01