




MORRIS CAT#: 90430 - 90447

Aluminum H-Taps

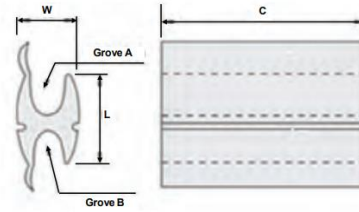

Features:

- Wide range, universal and reversible figure H-shaped line tap 6061-T6 Aluminum connector
- Conductors are separated by the A & B grooves
- Bendable taps secure both run and tap conductors freeing the lineman's hands to work with the installation tool
- Massive Aluminum design minimizes corrosion due to galvanic erosion
- Prefilled with Anti-Oxidant joint compound
- Formable Ribs Provide Broad Contact Area
- H Tap Line tap for Copper, Aluminum, ACSR and Compact Conductors

DIMENSIONS - INCHES																
CAT. NO.	CONDUCTOR RANGE										INSTALLATION INFO.				CTN QTY	
	STANDARD CONDUCTOR						COMPACT CONDUCTOR				CONN LENGTH	DIE NO.	NO. OF INDENTS			
	ACSR	A GROOVE STR	SOL	ACSR	B GROOVE STR	SOL	ACSR	A GROOVE STR	B GROOVE STR	SOL			MECH	HYD		
90430	-	-	1	-	8	8	-	-	-	-	13/16	5/8 BG	3	-	10	
	3	2	2	-	10	10	-	-	-	-						
	4	3	3	-	12	12	-	-	-	-						
	6	4	4	-	14	14	-	-	-	-						
90433	-	1	-	-	1	-	1	1	1	1	1-7/16	0	4	2	10	
	2	2	2	2	2	2	2	2	2	2						
	3	3	3	3	3	3	3	3	3	3						
	4	4	4	4	4	4	4	4	4	4						
90435	-	2/0	2/0	-	1	1/0	2/0	2/0	1	1	1-11/16	0	5	2	10	
	1/0	1/0	1/0	2	2	1	1/0	2	2	-						
	1	1	1	3	3	3	1	1	3	3						
	2	2	-	4	4	4	2	2	4	4						
90454	-	-	-	6	6	6	-	-	6	6	1-1/8	0	5	2	10	
	1/0	2/0	-	1	1	2/0	2/0	1	1	1						
	1/0	1/0	1/0	2	2	2	1/0	1/0	2	2						
	1	1	1	3	3	3	1	1	3	3						
90482	2	2	2	4	4	4	2	2	4	4	1-3/8	0	5	2	10	
	3	3	-	6	6	-	-	6	6	6						
	4/0	4/0	4/0	4/0	4/0	4/0	266-18/1	266	266-18/1	266						
	3/0	3/0	3/0	3/0	3/0	3/0	4/0	250	4/0	250						
90439	2/0	2/0	2/0	2/0	2/0	2/0	3/0	4/0	3/0	4/0	1-13/16	0	5	2	10	
	1/0	1/0	-	1/0	1/0	-	2/0	3/0	2/0	3/0						
	-	-	4/0	-	3/0	3/0	-	-	-	-						
	-	4/0	3/0	2/0	2/0	2/0	3/0	3/0	3/0	3/0						
90440	2/0	3/0	2/0	1/0	1/0	-	2/0	2/0	2/0	2/0	1-13/16	0	5	2	10	
	1/0	2/0	-	1	-	-	1/0	1/0	1/0	1/0						
	-	-	-	-	-	1	1	-	1	1						
	-	-	-	4/0	2	2	3/0	3/0	2	2						
90444	-	3/0	3/0	3	3	3	2/0	-	3	3	1-13/16	0	5	2	10	
	2/0	2/0	-	4	4	4	-	-	4	4						
	1/0	-	-	6	6	6	-	-	6	6						
	-	-	-	-	-	1/0	-	-	-	-						
90446	-	-	-	-	1	1	-	-	1	1	1-13/16	0	5	2	10	
	-	-	-	-	2	2	266-18/1	266	2	2						
	4/0	4/0	-	3	3	3	-	-	-	-						
	3/0	-	-	4	4	4	-	-	-	-						
90447	-	-	-	6	6	6	-	-	-	-	2-3/16	0	7	3	10	
	-	-	-	-	-	3/0	266-18/1	266	-	-						
	-	-	-	2/0	2/0	2/0	-	250	-	3/0						
	4/0	4/0	-	1/0	1/0	-	4/0	4/0	2/0	2/0						
90447	3/0	3/0	-	1	-	-	3/0	-	1/0	1/0	2-7/16	0	7	3	10	
	-	-	-	-	-	-	266-18/1	266-18/1	266-18/1	266						
90447	4/0	4/0	-	4/0	4/0	-	-	250	-	250	2-7/16	0	7	3	10	
	3/0	3/0	-	3/0	3/0	-	4/0	4/0	4/0	4/0						