Catalog Number	90454
UPC Number	
Description	Aluminum H-Tap #2 - 2/0 Line Side #6 - #2 Tap



Features

- Universal, Reversible H Shaped Connector
- Bendable Sidewall Secure Conductor - Hands Free Installation
- Manufactured from High Strength High Conductivity
  Pure Aluminum
  Anti-Oxidant Included
- Rated For Copper, Aluminum, ACSR, & Compact Conductors

General

Conductor Size:	#2 - 2/0 Line #6 - #2 Tap
Material:	Pure Aluminum
Conductivity:	57% IACS

Dimension Information

See Table

Specifications

Temperature Rating	90°C
Voltage Rating	600
Flammability Rating	N/A
Amp Rating	To Conductor

Packaging


Box Qty	See Table

Certifications

UL	UL 486A
CSA	Yes
RoHS	N/A

Cat No.	Conductor Sizes Grove A			Conductor Sizes Grove B			Inches			Box Qty	Case Qty
	CA-Cu Al-Cu	CAA AAC	Ø mm	CA-Cu Al-Cu	CAA AAC	Ø mm	C	L	W		
90454	#2 - 2/0	#2 - 1/0	25 - 70	#4 - #2	#6 - #2	13 - 35	1.73	1.1	0.71	25	100
90462	1/0-4/0	1/0-4/0	50 - 120	1/0-4/0	1/0-4/0	50 - 120	2.48	1.38	0.87	25	100

COD:	1363

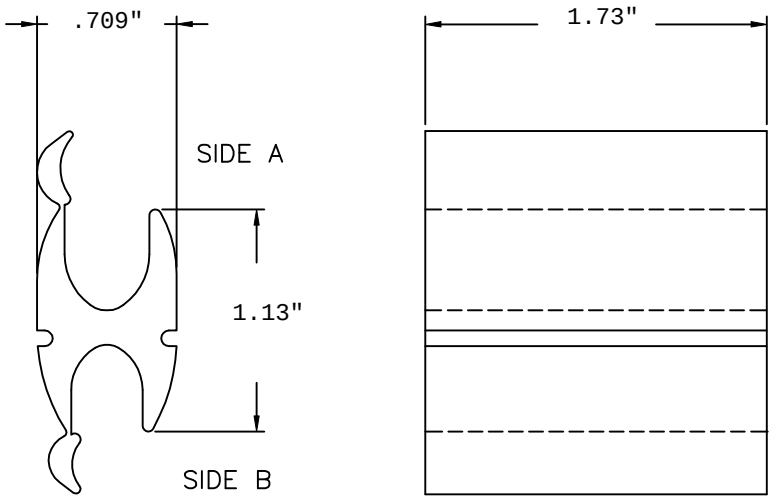

MARKINGS

	#2-2/0 CA Cu	#2 - 1/0 CAA	→ SIDE A
CAH–49 a 38	INDICE – O	3 COMP.	
	#4 - #2 CA Cu	#6 - #2 CAA	→ SIDE B

MATERIAL: ALUMINUM

CONDUCTIVITY: MINIMUM 57% IACS
APPLICATION TOOL: AT–60, AY–96 INDEX 0 IW–6 IU–3 COMPRESSIONS

OBS.1: THE CONNECTORS MUST BE SUPPLIED WITH ANTI–OXIDE COMPOUND AND UNITARY PACKING.

REF.: **STANDARD**

02	AUTOCAD	10/05/95	
01	INCL. OBS.2/COD. CPD	10/04/95	
No			

Morris Products Inc.
53 Carey Rd. Queensbury, NY 12804

ESC. S/E	Name	Date	No
	MARCIO	10/05/95	90454
		10/05/95	01 DE: 01