Morris CAT#: 90742
One Conductor Two Hole Mount Slotted Mounting Hole - Aluminum Mechanical Lug

LISTED
UL486B LISTED
AL9CU

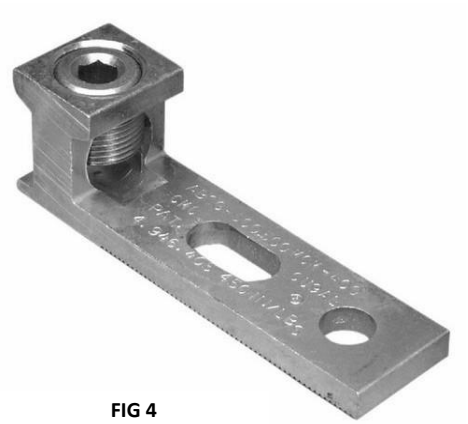


FIG 4

Features:

- Manufactured from High Strength 6061-T6 Aluminum Alloy to Insure Both Maximum Strength and Conductivity
- Dual Rated for both Copper and Aluminum Conductors
- Electro-Tin Plated for Low Contact Resistance and Protection Against Corrosion
- Assembly can be Made With Only a Screwdriver or Allen Wrench
- Connectors are Re-Usable
- NEMA Standard 1-3/4" Center Hole Spacing
- Rated 600V; 194°F (90°C)
- UL486B LISTED AL9CU

DIMENSIONS = INCHES

CAT. NO.	AWG	FIG	WIRE RANGE	LENGTH	WIDTH	HEIGHT	STUD SIZE	BOX QTY
ONE CONDUCTOR - TWO HOLE MOUNT - SLOTTED MOUNTING HOLE								
90742	350	4	350MCM-4SOL.	3.97	1.13	1.25	0.50	5

Morris CAT#: 90742
One Conductor Two Hole Mount Slotted Mounting Hole - Aluminum Mechanical Lug

Torque Chart

Tightening Torque Slotted Screws (in-lbs.)

Per UL486A/B Table 23

Wire Size	Torque
#2-2/0	50
#4-#6	45
#8	40
#10-#14	35

Torque Chart

Tightening Torque Internal Hex Screws (in-lbs.)

Per UL486A/B Table 23

Connector Size	Torque
1000	600
750-800	500
500-600	375
250-350	275
1/0-2/0	120