MORRIS CAT#: 90941B
Aluminum Mechanical Lugs 1 Conductor - Two Hole Mount

UL486B LISTED
AL9CU

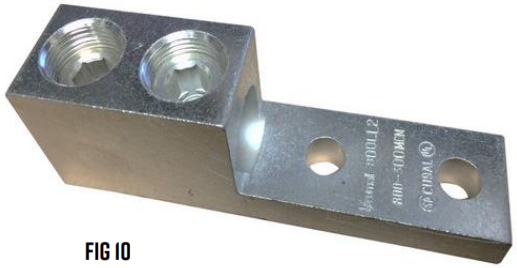

FIG 10

Features:

- Aluminum Mechanical Lug manufactured from High Strength 6061-T6 Aluminum Alloy to insure both maximum strength and conductivity
- AL9CU Dual Rated for both Copper and Aluminum Conductors
- Electro-tin Plated to provide low contact resistance and protection against corrosion
- Assembly can be made with only a screwdriver or allen wrench and they are re-usable
- NEMA Standard Mounting Hole Drilling 1-3/4" Centers
- Rated 600V 194°F (90°C)
- Conductor lug is UL486B/CSA Listed

DIMENSIONS = INCHES

CAT. NO.	AWG	FIG	WIRE RANGE	LENGTH	WIDTH	HEIGHT	STUD SIZE	BOX QTY
ONE CONDUCTOR - TWO HOLE MOUNT								
90941B	600	10	600MCM-4SOL.	5.75	1.50	1.57	0.50	100