




MORRIS CAT#: 93009-93088

Aluminum Long Barrel 1 Hole Compression Lugs

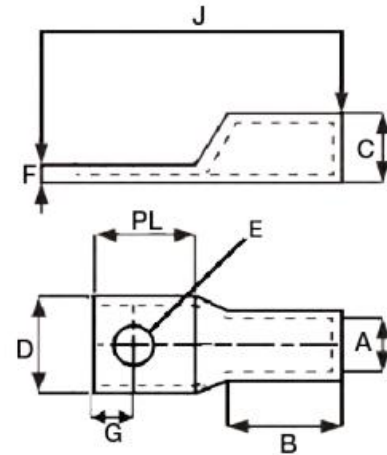

Features:

- AL9CU Listed - For Both Aluminum and Copper Conductors
- Pre-filled with Oxide Inhibitor
- Made of High-Conductivity Seamless Aluminum
- Electro-Tin Plating Resists Corrosion, Reduces Contact Resistance for Maximum Conductivity
- Single Mounting Hole
- Color Coded Die Index and Crimp Marks Printed on Barrel
- UL 486B AL9CU Listed for Applications Thru 35KV



MORRIS CAT#: 93009-93088

Aluminum Long Barrel 1 Hole Compression Lugs



DIMENSIONS - INCHES

CAT. NO.	WIRE RANGE	STUD SIZE	COLOR CODE	A	C	J	B	D	F	E	G	PL	BOX QTY
93009	6 STR.	#10	GRAY	.20	.34	2.01	.86	.57	.10	.21	.38	.88	50
93010	6 STR.	1/4	GRAY	.20	.34	2.01	.86	.57	.10	.25	.38	.88	50
93012	6 STR.	5/16	GRAY	.20	.34	2.01	.86	.57	.10	.33	.38	.88	50
93014	6 STR.	3/8	GRAY	.20	.34	2.01	.86	.57	.10	.41	.38	.88	50
93016	4 STR.	1/4	GREEN	.25	.44	2.31	1.10	.57	.19	.25	.38	.88	30
93018	4 STR.	5/16	GREEN	.25	.44	2.31	1.10	.57	.19	.33	.38	.88	30
93020	4 STR.	3/8	GREEN	.25	.44	2.31	1.10	.57	.19	.41	.38	.88	30
93022	2 STR.	1/4	PINK	.31	.53	2.50	1.20	.71	.22	.25	.38	.88	30
93024	2 STR.	5/16	PINK	.31	.53	2.50	1.20	.71	.22	.33	.38	.88	30
93026	2 STR.	3/8	PINK	.31	.53	2.50	1.20	.71	.22	.41	.38	.88	30
93027	2 STR.	1/2	PINK	.31	.53	2.50	1.20	.71	.22	.51	.38	.88	30
93028	1 STR.	1/4	GOLD	.35	.53	2.50	1.20	.73	.18	.25	.38	.88	15
93030	1 STR.	5/16	GOLD	.35	.53	2.50	1.20	.73	.18	.33	.38	.88	15
93032	1 STR.	3/8	GOLD	.35	.53	2.50	1.20	.73	.18	.41	.38	.88	15
93033	1 STR.	1/2	GOLD	.35	.53	2.50	1.20	.73	.18	.51	.38	.88	15
93034	1/0 STR.	1/4	TAN	.39	.63	2.81	1.20	.85	.24	.25	.50	.93	20
93036	1/0 STR.	5/16	TAN	.39	.63	2.81	1.20	.85	.24	.33	.50	.93	20
93038	1/0 STR.	3/8	TAN	.39	.63	2.81	1.20	.85	.24	.41	.50	.93	20
93039	1/0 STR.	1/2	TAN	.39	.63	2.81	1.20	.85	.24	.51	.50	.93	20
93040	2/0 STR.	1/4	OLIVE	.44	.69	2.81	1.30	.94	.24	.25	.50	1.12	20
93042	2/0 STR.	5/16	OLIVE	.44	.69	2.81	1.30	.94	.24	.33	.50	1.12	20
93044	2/0 STR.	3/8	OLIVE	.44	.69	2.81	1.30	.94	.24	.41	.50	1.12	20
93046	2/0 STR.	1/2	OLIVE	.44	.69	2.81	1.30	.94	.24	.51	.50	1.12	20
93048	3/0 STR.	1/4	RUBY	.48	.76	3.00	1.40	1.03	.28	.25	.50	1.12	15
93050	3/0 STR.	5/16	RUBY	.48	.76	3.00	1.40	1.03	.28	.33	.50	1.12	15
93052	3/0 STR.	3/8	RUBY	.48	.76	3.00	1.40	1.03	.28	.41	.50	1.12	15
93054	3/0 STR.	1/2	RUBY	.48	.76	3.00	1.40	1.03	.28	.51	.50	1.12	15
93056	4/0 STR.	1/4	WHITE	.55	.84	3.43	1.40	1.15	.29	.25	.56	1.31	10
93058	4/0 STR.	5/16	WHITE	.55	.84	3.43	1.40	1.15	.29	.33	.56	1.31	10
93060	4/0 STR.	3/8	WHITE	.55	.84	3.43	1.40	1.15	.29	.41	.56	1.31	10
93062	4/0 STR.	1/2	WHITE	.55	.84	3.43	1.40	1.15	.29	.51	.56	1.31	10
93063	250 MCM	1/4	RED	.59	.92	3.50	1.50	1.26	.32	.25	.63	1.31	9
93064	250 MCM	3/8	RED	.59	.92	3.50	1.50	1.26	.32	.41	.63	1.31	9
93066	250 MCM	1/2	RED	.59	.92	3.50	1.50	1.26	.32	.51	.63	1.31	9
93068	300 MCM	3/8	BLUE	.65	1.01	4.00	1.60	1.37	.35	.41	.63	1.50	9
93070	300 MCM	1/2	BLUE	.65	1.01	4.00	1.60	1.37	.35	.51	.63	1.50	9
93072	350 MCM	3/8	BROWN	.72	1.12	4.25	1.90	1.52	.39	.41	.69	1.50	6
93074	350 MCM	1/2	BROWN	.72	1.12	4.25	1.90	1.52	.39	.51	.69	1.50	6
93076	400 MCM	3/8	GREEN	.76	1.19	4.60	2.30	1.61	.42	.41	.69	1.50	6
93078	400 MCM	1/2	GREEN	.76	1.19	4.60	2.30	1.61	.42	.51	.69	1.50	6
93080	500 MCM	3/8	PINK	.84	1.32	4.75	2.50	1.79	.47	.41	.75	1.50	6
93082	500 MCM	1/2	PINK	.84	1.32	4.75	2.50	1.79	.47	.51	.75	1.50	6
93084	500 MCM	5/8	PINK	.84	1.32	4.75	2.50	1.79	.47	.67	.75	1.50	6
93085	600 MCM	1/2	BLACK	.92	1.44	5.12	2.60	1.96	.51	.51	.75	1.87	4
93086	600 MCM	5/8	BLACK	.92	1.44	5.12	2.60	1.96	.51	.67	.75	1.87	4
93087	750 MCM	1/2	YELLOW	1.03	1.60	6.12	3.20	2.19	.55	.51	.94	2.00	4
93088	750 MCM	5/8	YELLOW	1.03	1.60	6.12	3.20	2.19	.55	.67	.94	2.00	4