




# MORRIS CAT#: 93912-93920 Meter Socket Lugs

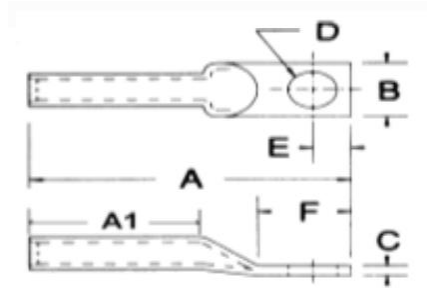

## Features:

- Uses 840 Common Dies - One Die Installs All Sizes
- For Meter Pan and General Applications
- Accepts Both Aluminum and Copper Conductors
- Made of High Conductivity Aluminum
- Connector Barrel is Coated with Oxide Inhibiting Compound
- Tin Plated
- Marked with Conductor Sizes and Die References
- Meets or Exceeds Class A Requirements of ANSI C119.4

DIMENSIONS = INCHES

| CAT.<br>NO. | WIRE SIZE—ALUMINUM OR COPPER WIRE SIZE |            |         |       | STUD SIZE<br>D | A     | A1    | B       | F      |
|-------------|----------------------------------------|------------|---------|-------|----------------|-------|-------|---------|--------|
|             | CONCENTRIC                             | COMPRESSED | COMPACT | SOLID |                |       |       |         |        |
| 93912       | 2/0                                    | 2/0        | 3/0     | 3/0   | 3/8            | 3-1/4 | 1-3/8 | 1-15/16 | 1-5/16 |
| 93920       | 4/0                                    | 4/0        | 250     | -     | 3/8            | 3-1/4 | 1-3/8 | 1-15/16 | 1-5/16 |