




MORRIS CAT#: 94213-94876

Copper Long Barrel 1 Hole Compression Lugs

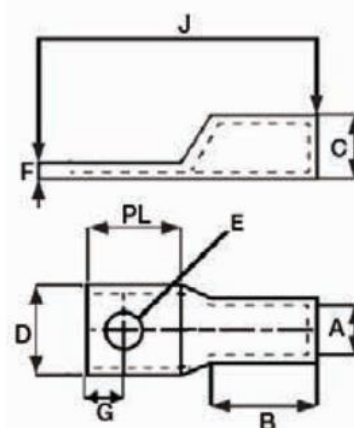

Features:

- High Conductivity Seamless Copper
- Electro-Tin Plating Resists Corrosion, Reduces Contact Resistance for Maximum Conductivity
- Single Mounting Hole
- Long Barrel Accommodates Multiple Crimps
- Color Coded Die Index and Crimp Marks Printed on Barrel
- UL 486A Listed for Applications Thru 35KV

DIMENSIONS = INCHES

CAT. NO.	WIRE RANGE	STUD SIZE	COLOR CODE	A	C	J	B	D	F	E	G	PL	BOX QTY
94210	8 STR.	#10	RED	.173	.271	1.51	.80	.42	.08	.21	.28	.59	50
94211	8 STR.	1/4	RED	.173	.271	1.52	.81	.42	.08	.25	.28	.59	50
94852	6 STR.	#8	BLUE	.204	.297	2.01	1.12	.42	.08	.16	.29	.65	40
94213	6 STR.	#10	BLUE	.204	.297	2.01	1.12	.42	.08	.21	.29	.65	40
94214	6 STR.	1/4	BLUE	.204	.297	2.01	1.12	.42	.08	.25	.29	.65	40
94215	6 STR.	5/16	BLUE	.204	.297	2.01	1.12	.42	.08	.33	.29	.65	40
94216	6 STR.	3/8	BLUE	.204	.297	2.01	1.12	.60	.08	.41	.29	.65	40
94217	4 STR.	#10	GRAY	.251	.344	2.05	1.12	.49	.09	.21	.29	.65	30
94218	4 STR.	1/4	GRAY	.251	.344	2.05	1.12	.49	.09	.25	.29	.65	30
94219	4 STR.	5/16	GRAY	.251	.344	2.05	1.12	.56	.09	.33	.29	.65	30
94220	4 STR.	3/8	GRAY	.251	.344	2.05	1.12	.59	.09	.41	.29	.65	30
94221	2 STR.	1/4	BROWN	.315	.422	2.24	1.25	.60	.10	.25	.38	.75	15
94222	2 STR.	5/16	BROWN	.315	.422	2.24	1.25	.60	.10	.33	.38	.75	15
94223	2 STR.	3/8	BROWN	.315	.422	2.24	1.25	.60	.10	.41	.38	.75	15
94860	1 STR.	1/4	GREEN	.360	.469	2.32	1.25	.67	.11	.25	.38	.75	15
94226	1 STR.	5/16	GREEN	.360	.469	2.32	1.25	.67	.11	.33	.38	.75	15
94227	1 STR.	3/8	GREEN	.360	.469	2.32	1.25	.67	.11	.41	.38	.75	15
94866	1/0 STR.	#10	PINK	.390	.520	2.56	1.38	.74	.13	.21	.41	.81	10
94868	1/0 STR.	1/4	PINK	.390	.520	2.56	1.38	.74	.13	.25	.41	.81	10
94230	1/0 STR.	5/16	PINK	.390	.520	2.56	1.38	.74	.13	.33	.41	.81	10
94234	1/0 STR.	3/8	PINK	.390	.520	2.56	1.38	.74	.13	.41	.41	.81	10
94235	1/0 STR.	1/2	PINK	.390	.520	2.56	1.38	.74	.13	.51	.41	.81	10
94870	2/0 STR.	1/4	BLACK	.441	.563	2.64	1.50	.81	.12	.25	.48	.81	10
94238	2/0 STR.	3/8	BLACK	.441	.563	2.64	1.50	.81	.12	.41	.48	.81	10
94239	2/0 STR.	1/2	BLACK	.441	.563	2.64	1.50	.81	.12	.51	.48	.81	10
94872	3/0 STR.	1/4	ORANGE	.492	.622	3.03	1.50	.90	.13	.25	.48	1.06	20
94245	3/0 STR.	3/8	ORANGE	.492	.622	3.03	1.50	.90	.13	.41	.48	1.06	20
94246	3/0 STR.	1/2	ORANGE	.492	.622	3.03	1.50	.90	.13	.51	.48	1.06	20
94876	4/0 STR.	1/4	PURPLE	.547	.688	3.23	1.62	1.00	.13	.25	.52	1.06	15
94253	4/0 STR.	3/8	PURPLE	.547	.688	3.23	1.62	1.00	.13	.41	.52	1.06	15
94254	4/0 STR.	1/2	PURPLE	.547	.688	3.23	1.62	1.00	.13	.51	.52	1.06	15