



Catalog Number See Table
UPC Number
Description 2 Bolt Aluminum Parallel Groove Clamp
 1/0 - 400 MCM



Features

- Manufactured from Thermically Treated Extruded Aluminum Alloy
- Steel Galvanized Set Screws
- Feed /Tap Configuration for Low Voltage Power Distribution

General

Material: Extruded Aluminum Alloy
Screw Material: Galvanized Steel
Screw Thread:
Wire Range: 1/0 - 400 MCM

Dimension Information

See Table

Specifications



Temperature Rating
Voltage Rating 600
Flammability Rating
Amp Rating

Packaging

Box Qty See Table

Certifications




UL N/A
cUL N/A
RoHS N/A



Cat No.	Figure	Main			Tap			Inches					Box Qty
		CU-AL	ACSR	Wire Diameter	Cu-AL	ACSR	Wire Diameter	A	B	C	D	E	
96022	2	1/0-4/0	1/0-4/0	.373-.563	8-1/0	6-1/0	.128-.398	1.97	1.89	2.91	1.5	0.394	25
96026	2	1/0-397.5	1/0-336.4	.373-.720	6-2/0	6-1/0	.162-.417	2.36	2.24	2.91	1.67	0.394	25
96030	2	397.5-400	397.5	.728-.740	397.5-400	397.5	.728-.740	2.36	2.56	3.15	1.97	0.472	25

Ref.: STANDARD

Note 1: Conectors are Pre Filled
with anti-oxide compound

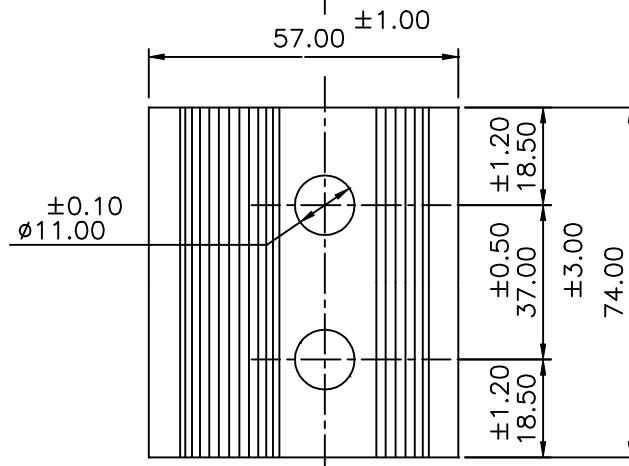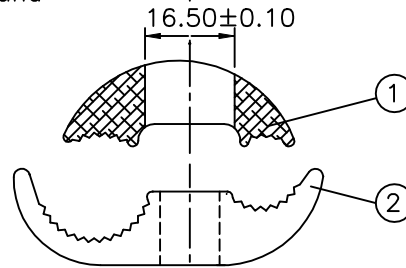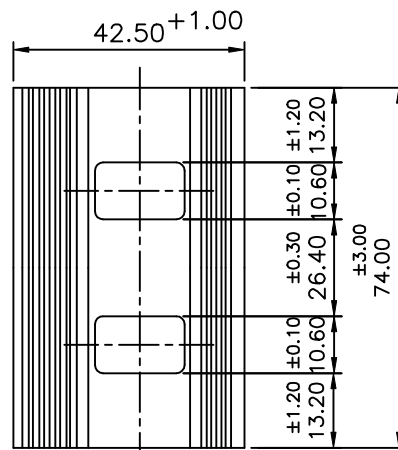

Dimensions in mm

MARKING

**96026**

1/0-397.5 CA Cu 1/0-336,4 CAA
F.6-2/0 CA Cu - 6-1/0 CAA

05	Pressure Washer M 10	02	STEEL SAE 1060/1070 Hot Galvanized		
04	Hex Nut M10 x 1.50	02	STEEL SAE 1010/1020 Hot Galvanized		
03	Round Head Bolt M10x1.50x60.00	02	STEEL SAE 1010/1020 Hot Galvanized		
02	Female Profile	01	Aluminium alloy		
01	Male Profile	01	Aluminium alloy		
ITEM	DENOMINATION	QTY	MATERIAL	P.L. (unit)	P.B. (unit)

Morris Products Inc.
53 Carey Rd.
Queensbury, NY 12804

				Morris Products Inc.				
				53 Carey Rd.				
03		20/03/00		Queensbury, NY 12804				
02		02/05/95						
01		15/09/94				Date	No	96026
						20/03/00		
No		Date						
Revisions			Appv' l		20/03/00	01	DE: 01	