




Morris CAT#: 97312-97632
Clear Insulated 2 Conductor - Dual Side Entry

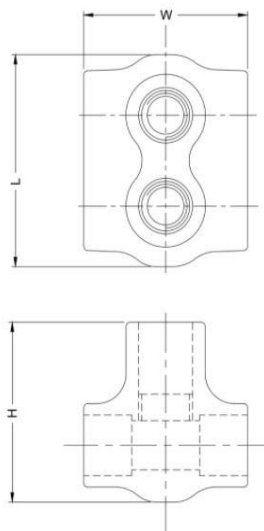

Features:

- Clear Insulation
- 6061-T6 Aluminum
- Insulated with Rugged High-Dielectric Plastisol Dipped Coating
- Pre-filled with Oxide Inhibitor
- Easy Re-Entry for Changes, Inspection or Troubleshooting
- Plugs Marked with Connector Max Wire Size for Easy ID
- CU9AL Dual Rated for use with Copper and/or Aluminum Wire
- One Wire Per Terminal
- Temperature Range of -49°F to 194°F (-45° to 90°C)
- 600 Volt
- Rated For Use with 90°C Cables
- ANSI C119.4 & UL 486A & 486B Listed

DIMENSIONS = INCHES

CAT. NO.	WIRE RANGE	ALLEN HEX	LENGTH	WIDTH	HEIGHT	BOX QTY
97312	4-14	SLOTTED	1.13	1.25	1.38	12
97332	2-14	SLOTTED	1.15	1.50	1.42	12
97342	1/0-2	3/16	1.69	1.80	1.93	10
97352	2/0-6	3/16	1.69	1.80	1.93	10
97392	250-6	5/16	2.18	2.48	2.37	6

DIMENSIONS = INCHES

CAT. NO.	WIRE RANGE	ALLEN HEX	LENGTH	WIDTH	HEIGHT	BOX QTY
97412	350-6	5/16	2.50	2.67	2.50	6
97432	500-6	5/16	2.98	3.38	2.85	4
97532	600-250	5/16	2.98	3.38	2.85	4
97631	750-250	3/8	3.33	3.44	3.52	2
97632*	750-250	3/8	3.33	3.44	3.52	2

* Dual Set Screw Configuration (4 Set Screws - 2 Per Port)



Morris CAT#: 97312-97632
Clear Insulated 2 Conductor - Dual Side Entry

Strip Length

CONNECTOR SIZE	STRIP LENGTH IN inch		BOLT DIA FOR MOUNTING
750 MCM	2		5/16
500 MCM	1-1/2		5/16
350 MCM	1-1/2		5/16
250 MCM	1		5/16
3/0 AWG	1		1/4
1/0 AWG	1		1/4
1 AWG	1		1/4
# 4 AWG	1		1/4

TORQUE Values

WIRE SIZE	CONNECTOR SIZE										
	750	600	500	350	250	3/0	2/0	1/0	1	#2	#4
	TORQUE VALUE IN/LBS										
600-750	442										
600	442	398	310								
500	442	398	310								
400	310	398	310								
350	310	398	310	221							
250	310	398	310	221	149						
4/0			310	221	149						
3/0			310	221	149	100					
2/0			310	221	149	100	89				
1/0			310	221	149	100	89	89			
#3 - # 1			310	221	149	100	89	89	89	80	
#4 - # 6			310	221	149	100	89	89	89	80	35
# 8							89	89	89	80	35
# 10 - # 14							89	89	89	80	35

Note : Not recomanded for fine Stranded Flexible Wire .