



HPFL HIGH-POWER FLOODLIGHT

Wattage & CCT Selectable Floodlight



FEATURES:

- Color Selectable: 3000K/4000K/5000K
- Wattage Selectable: 50%/75%/100%
- Heavy-duty Die Cast Aluminum Housing
- Bronze Powder Coat Finish
- Integrated photocell with DIP Switch
- Tempered Glass Lens
- 0-10V Dimming
- Includes 3' Power Cords
- IP65 Rated for Wet Locations
- 5 Year Warranty



HPFL260

130-260W



HPFL155


78-155W

Cat. No.	Wattage	Lumens	Lumens/	CCT	Voltage	CRI	Dimming	DLC Listing
HPFL155	78/116/155	25,748	166	3K/4K/5K	120-277V	>70	0-10V	Premium
HPFL260	130/195/260	44,852	172	3K/4K/5K	120-277V	>70	0-10V	Premium


PHOTOMETRY:

PRODUCT DIMENSIONS:


HPFL155

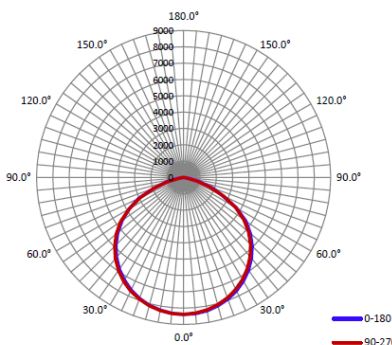


HPFL260

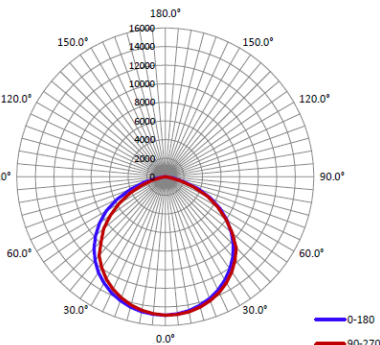

HPFL155

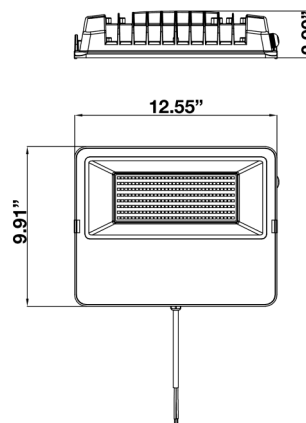

HPFL260

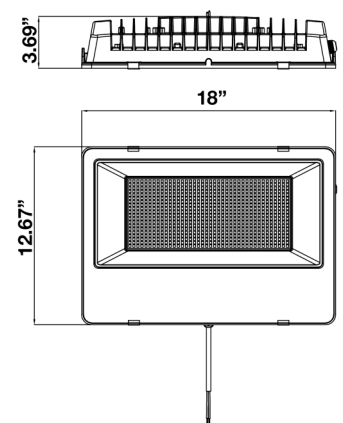



HPFL HIGH-POWER FLOODLIGHT

Wattage & CCT Selectable Floodlight

Technical Specifications:

Electrical:

Input Voltage: 120-277V AC
Current: 1.3A @ 120V (HPFL155),
2.16A @ 120V (HPFL260)
Frequency: 60Hz
Power Factor: ≥ 0.9
THD: $< 20\%$ @ 120V

Product Parameters:

Watts: 100%/75%/50% selectable
CCT: 3000K/4000K/5000K selectable
Beam Angle: NEMA 7 X 7

50,000+ Hours @95°F LED Life Span

Light Output:	3000K	4000K	5000K
HPFL155	23,580 lm	25,748 lm	25,227 lm
HPFL260	42,008 lm	44,852 lm	43,477 lm

Efficiency:	3000K	4000K	5000K
HPFL155	152 lm/W	166 lm/W	163 lm/W
HPFL260	162 lm/W	172 lm/W	167 lm/W

Chromaticity Measurements:

CRI: > 70
R9: > -36 (HPFL155), > -40 (HPFL260)

Operating Temperature:

Minimum Starting: -40°F
Maximum: 104°F

Construction:

Housing: Die Cast Aluminum, Bronze Powder Coat Finish
IP Rating: IP65 Wet Location
Lens Material: Tempered Glass

Listings:

cULus: E474299
DLC: Premium

Accessories Available:

Slipfitter Mount: HPFLSF
Trunnion Mount: HPFLTR


HPFL155 and HPFL260 must be installed with one of the mounts (HPFLSF or HPFLTR), in order to maintain UL certification.

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

MOUNTS

HPFLSF SLIPFITTER

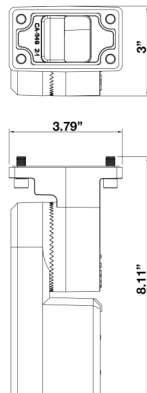

HPFLTR TRUNNION

