




Rigid Steel Couplings



- Connect Threaded Rigid Conduit
- Zinc Plated Steel
- Concrete Tight
- Male Hub Thread (NPT)

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX
		LENGTH	OD	
14387	1/2"	1.63	1.01	100
14388	3/4"	1.64	1.25	50
14389	1"	1.97	1.53	30
14390	1-1/4"	2.03	1.87	25
14391	1-1/2"	2.06	2.16	25
14392	2"	2.13	2.65	20
14393	2-1/2"	3.19	3.25	12
14394	3"	3.31	3.87	12
14395	3-1/2"	3.41	4.50	12
14396	4"	3.52	4.88	6
14397	5"	3.95	6.00	2
14398	6"	4.25	7.20	1



Rigid Couplings


Malleable Rigid 3-Piece Couplings



- Used to Join 2 lengths of Threaded Conduit when Neither Can Be Rotated
- Threaded (NPT) for Rigid Conduit and IMC
- Concrete Tight

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS							INNER BOX	OUTER BOX
		A	B	C	D	E	F	G		
14440	1/2"	1.01	.869	1.30	.788	.981	.775	1.05	20	200
14441	3/4"	1.20	1.10	1.55	.970	1.19	.965	1.25	10	100
14442	1"	1.52	1.33	1.78	1.22	1.50	1.23	1.58	5	50
14443	1-1/4"	1.91	1.69	2.20	1.58	1.85	1.56	1.90	5	50
14444	1-1/2"	2.15	1.93	2.50	1.83	2.10	1.78	2.20	3	30
14445	2"	2.65	2.40	3.08	2.25	2.58	2.25	2.75	-	20
14446	2-1/2"	3.20	2.90	3.75	2.70	3.10	2.70	3.31	-	10
14447	3"	3.85	3.58	4.40	3.35	3.82	3.30	4.40	-	5
14448	3-1/2"	4.09	4.05	5.04	4.10	4.15	4.00	4.90	-	5
14449	4"	4.89	4.55	5.40	4.30	4.85	4.33	5.02	-	2
14450	5"	5.89	5.55	6.75	5.43	5.84	5.43	5.93	-	1
14451	6"	6.93	6.62	7.62	6.50	6.81	6.50	6.87	-	1

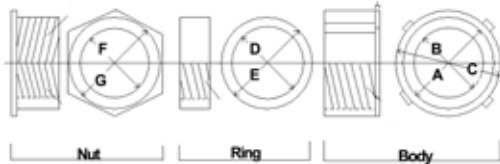

Malleable Rigid Split Couplings



- A Speed Union for Economically Joining 2 Threaded Rigid Metal Conduits
- A Neoprene Gasket provides a Concrete Tight Seal at the Joint
- Use where Conduit Runs are Closely Spaced; or Conduit is tight against Wall, Ceiling or other Obstruction
- Use where Conduits Cannot be Rotated

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
14452	2"	2.75	2.04	3.30	5	25
14453	2-1/2"	3.20	2.98	4.23	2	10
14454	3"	3.85	3.14	4.85	2	10
14455	3-1/2"	4.48	3.26	5.36	1	5
14456	4"	4.83	3.34	6.07	1	5

