


# Nylon Cable Ties

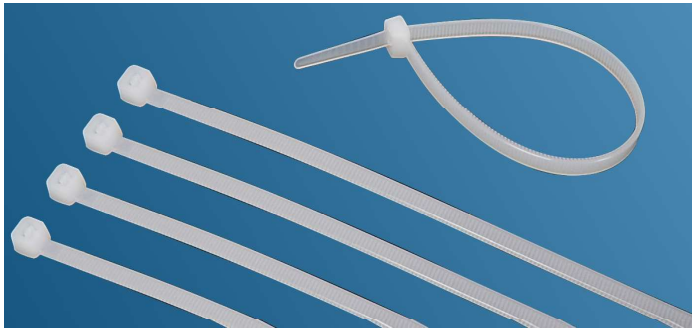

- Made from UL approved Nylon 6/6
- Normal service temperature range: -40° to 185°F (-40°C to 85°C)
- Flammability Rating: UL94V-2
- 20087 & 20089 UL181b-C listed for use with UL non-metallic air ducts & air connectors
- Packed in Sealed Plastic Bags

DIMENSIONS = INCHES

CAT. NO.	TENSILE STRENGTH (LBS.)	LENGTH	WIDTH	MAXIMUM BUNDLE DIAMETER	BAG QTY	MASTER BAG QTY
20012	18	3	.094	.71	100	1,000
20014	18	4	.098	.99	100	1,000
20016	18	4-3/4	.098	1.18	100	1,000
20018	18	6	.098	1.38	100	1,000
20020	18	6-1/2	.098	1.73	100	1,000
20022	18	8	.098	2.17	100	1,000
20034	40	6	.140	1.54	100	1,000
20036	40	8	.125	2.17	100	1,000
20038	40	10	.140	2.91	100	1,000
20040	40	11-3/4	.140	3.35	100	1,000
20052	50	7	.156	1.93	100	1,000
20054	50	8	.179	2.17	100	1,000
20056	50	11	.187	3.19	100	1,000
20058	50	14-1/2	.187	4.02	100	1,000
20060	50	17	.187	4.92	100	100
20072	120	8	.296	2.17	100	100
20074	120	11-3/4	.296	3.19	100	100
20076	120	15	.296	4.33	100	100
20082	175	17-3/4	.312	5.24	100	100
20085	175	24	.351	7.28	100	100
20086	175	30	.351	9.29	100	100
20087	175	36	.351	10.63	100	100
20089	175	48	.351	14.96	100	100
20092	250	11	.500	3.19	100	100
20094	250	21	.500	6.54	100	100
20098	250	40	.500	12.48	100	100

# Nylon Cable Ties - 1000 Piece Bulk Pack



DIMENSIONS = INCHES

CAT. NO.	TENSILE STRENGTH (LBS.)	LENGTH	WIDTH	MAXIMUM BUNDLE DIAMETER	BAG QTY
20112	18	4	.098	.87	1,000
20118	40	6	.140	1.42	1,000
20120	40	8	.126	2.09	1,000
20122	40	11-3/4	.142	3.23	1,000
20124	50	7	.142	1.81	1,000
20126	50	8	.181	2.05	1,000
20128	50	11	.189	3.03	1,000
20130	50	14-1/2	.189	4.13	1,000