

Stainless Steel Ties




- Made of 304 Stainless Steel
- Ideally Suited for Hazardous Environments & Heavy Loads
- Roller-Ball design allows Low Insertion Force
- Self Locking for fast and easy installation
- Smooth Rounded Edges will not damage wires
- Can install by hand or with tool
- Normal Operating Temperature: -112°F to 1000°F
- Non-Magnetic, UV resistant & fireproof

DIMENSIONS = INCHES

| CAT. NO. | TENSILE STRENGTH (LBS.) | LENGTH | WIDTH | THICKNESS | MAXIMUM BUNDLE DIAMETER | BAG QTY | MASTER BAG QTY |
|----------|-------------------------|--------|-------|-----------|-------------------------|---------|----------------|
| 20912 | 200 | 5.0 | .18 | .01 | 1.0 | 100 | 1,000 |
| 20914 | 200 | 7.9 | .18 | .01 | 2.0 | 100 | 1,000 |
| 20916 | 200 | 10.5 | .18 | .01 | 2.7 | 100 | 1,000 |
| 20918 | 200 | 14.2 | .18 | .01 | 4.0 | 100 | 1,000 |
| 20920 | 200 | 20.4 | .18 | .01 | 6.0 | 100 | - |
| 20922 | 200 | 26.8 | .18 | .01 | 8.0 | 100 | - |
| 20924 | 200 | 33.0 | .18 | .01 | 10.0 | 100 | - |
| 20930 | 350 | 6.0 | .31 | .01 | 1.0 | 100 | 1,000 |
| 20932 | 350 | 7.9 | .31 | .01 | 2.0 | 100 | 1,000 |
| 20934 | 350 | 10.5 | .31 | .01 | 2.7 | 100 | 1,000 |
| 20936 | 350 | 14.2 | .31 | .01 | 4.0 | 100 | 1,000 |
| 20938 | 350 | 20.4 | .31 | .01 | 6.0 | 100 | - |
| 20940 | 350 | 26.8 | .31 | .01 | 8.0 | 100 | - |
| 20942 | 350 | 33.0 | .31 | .01 | 10.0 | 100 | - |

Mounting Nylon Cable Ties

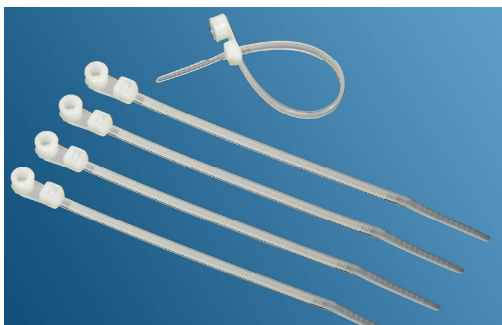

- Use the screw eye to position and secure bundled harnesses with screws, bolts or rivets
- Fasten bundles, hoses, ducts, etc. to panels or other surfaces
- Accepts #10 Screw
- Made from UL approved Nylon 6/6
- Normal Service Temperature Range: -40°F to 185°F (-40°C to 85°C)
- Flammability Rating: UL94V-2

DIMENSIONS = INCHES

| CAT. NO. | TENSILE STRENGTH (LBS.) | LENGTH | WIDTH | MAX BUNDLE DIA. | MTG HOLE DIA. | BAG QTY | MASTER BAG QTY |
|--------------------------|-------------------------|--------|-------|-----------------|---------------|---------|----------------|
| NATURAL COLOR | | | | | | | |
| 20312 | 25 | 3-7/8 | .098 | .98 | 1/8" | 100 | 1,000 |
| 20314 | 40 | 6 | .144 | 1.54 | 3/16" | 100 | 1,000 |
| 20316 | 50 | 8 | .164 | 2.17 | 3/16" | 100 | 1,000 |
| 20317 | 50 | 12 | .187 | 3.35 | 1/4" | 100 | 1,000 |
| 20318 | 50 | 14-1/2 | .187 | 4.02 | 3/16" | 100 | 100 |
| 20320 | 120 | 15-3/4 | .308 | 4.80 | 1/4" | 100 | 100 |
| ULTRAVIOLET BLACK | | | | | | | |
| 20332 | 25 | 3-7/8 | .098 | .98 | 1/8" | 100 | 1,000 |
| 20334 | 40 | 6 | .144 | 1.54 | 3/16" | 100 | 1,000 |
| 20336 | 50 | 8 | .164 | 2.17 | 3/16" | 100 | 1,000 |
| 20337 | 50 | 12 | .187 | 3.35 | 1/4" | 100 | 1,000 |
| 20338 | 50 | 14-1/2 | .187 | 4.02 | 3/16" | 100 | 100 |
| 20340 | 120 | 15-3/4 | .308 | 4.80 | 1/4" | 100 | 100 |