
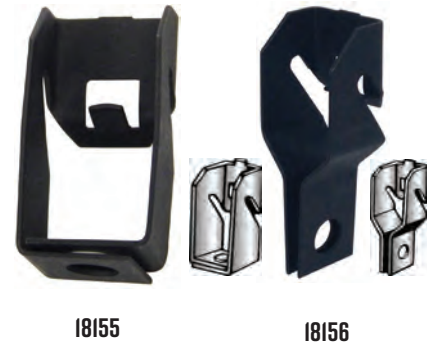


Z Purlin Hangers

- Can be used to suspend fixtures etc.
- No Power Tools required
- Compensated for Angle of Purlin

Static Load Limit: 100 lbs




DIMENSIONS = INCHES

CAT. NO.	DESCRIPTION	BOX QTY
18155	1/4" BOTTOM HOLE	100
18156	1/4" HOLE FOR WIRE, S-HOOKS, PERFORATED STRAP AND JACK CHAIN	100

Z Purlin Flange Hangers

- Fits 1/16" to 1/4" thick Z Purlin or vertical flanges
- Clearance for 1/4" bolt
- Accommodates tooling for floor installations
- Can be used with S-hooks, perforated strap & wire

Static Load Limit:
18180 - 100lbs
18181 - 160lbs

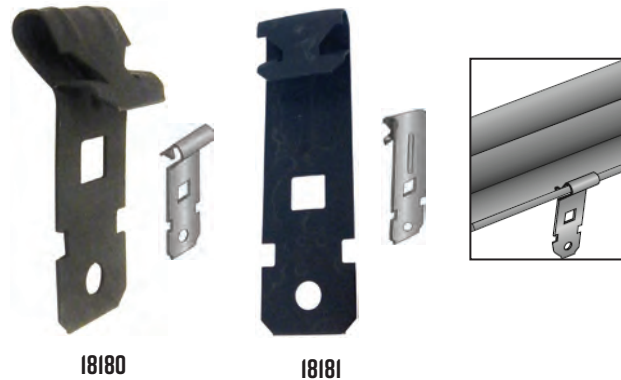


DIMENSIONS = INCHES

CAT. NO.	FLANGE THICKNESS	FOR USE WITH	BOX QTY
18180	1/16" TO 1/4"	FOR USE WITH ANGLED Z PURLIN	100
18181	1/16" TO 1/4"	VERTICAL FLANGE	100

Z Purlin Conduit Hanger Assembly

- Installed without power tools
- Compensates for angle of purlin

Static Load Limit: 100 lbs




DIMENSIONS = INCHES

CAT. NO.	DESCRIPTION	BOX QTY
18171	1/2" TO 3/4" CONDUIT TO Z PURLIN	100
18172	1" CONDUIT TO Z PURLIN	100

Z Purlin Rod Hanger Assembly

- Installed without power tools
- Compensates for angle of purlin

Static Load Limit: 100 lbs



DIMENSIONS = INCHES

CAT. NO.	FOR USE WITH	BOX QTY
18160	1/4" THREADED ROD	100
18161	3/8" THREADED ROD	100