


# Cable Support Bridle Rings with Saddle

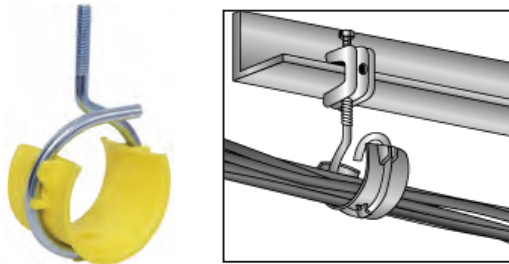

- Cost effective alternative to expensive cable tray
- Wide surface saddle provides support without stress for Category 5, fiber-optic, and other sensitive voice/datacomm cables
- 1/4-20 Mechanical Thread

DIMENSIONS - INCHES

CAT. NO.	DESCRIPTION	BOX QTY
18430	1-1/2" BRIDLE RING WITH SADDLE	50
18058	2" BRIDLE RING W/SADDLE	50
18060	4" BRIDLE RING W/SADDLE	50

## Bridle Rings



- Commonly used with Beam Clamps
- Supports communications cable & other low voltage uses
- Zinc plated steel

DIMENSIONS - INCHES

CAT. NO.	FIG	RING SIZE	THREAD	BOX QTY
18420	1	1" DIAMETER	10-24	100
18421	1	1/1/2" DIAMETER	1/4-20	100
18422	1	2" DIAMETER	1/4-20	100



FIG 1



FIG 2

- Commonly used with Wood Beams
- Supports communications cable and other low voltage
- Zinc plated steel

DIMENSIONS - INCHES

CAT. NO.	FIG	RING SIZE	THREAD	BOX QTY
18425	2	1" DIAMETER	3/16	100
18426	2	1/1/2" DIAMETER	1/4	100
18427	2	2" DIAMETER	1/4	100

## J Hooks - 2"


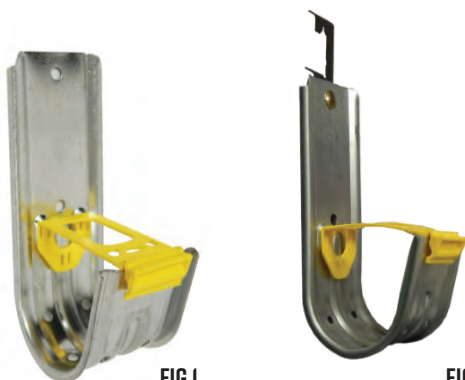


FIG 1

FIG 2

- 2" J Hooks for DataComm Applications
- Cost effective alternative to expensive cable tray
- Wide base provides support without stress for Cat5, fiber-optic, other sensitive voice/datacomm cables and inner-duct
- Continuous wide-base radius supports natural curve of cable, eliminating kinks & bending
- Cable wire retainer is supplied with every part
- Unique design eliminates the need for attachment plate when stacking
- Can be attached to a wide variety of structures using beam clamps, clips and many other components



CAT. NO.	FIG	DESCRIPTION	BOX QTY
18056	1	SCREW MOUNT	25
18405	2	CLIPS ON #12 WIRE THRU 3/8" ROD AND 1/8" TO 3/8" FLANGE	25