160V


Vinyl Seal

PRODUCT CUT SHEET


PROJECT:	
SUBMITTED BY:	
DATE:	
NOTES:	

Material

Material
Aluminum Alloy 6063, T5 Temper
Thermoplastic Polymer: Polyvinyl Chloride Formulated With An Environmentally Friendly Bio-Based Plasticizer
Vinyl is Gray
Exception: *DKB Vinyl is Black

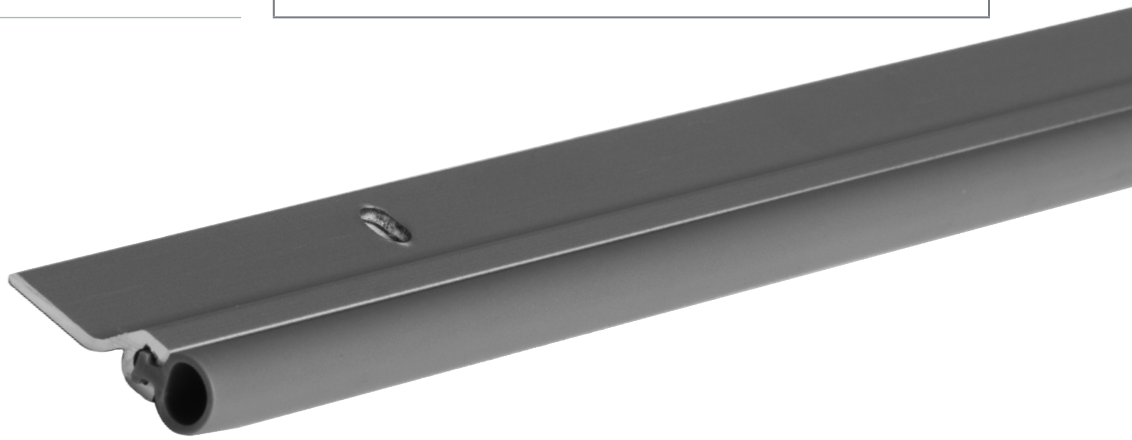

- Economical
- Flame Resistant
- Moisture Resistant
- Temperature Range 0°F to 140°F
- Oxidative Degradation From Age and Exposure to Cold, Heat And UV Causes Hardening, Loss of Memory and Resilience, Cracking, Crazing and Discoloration
- #6 X ¾" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment



Finishes

160V	Mill Aluminum
160VA	Anodized Aluminum
160VB	Gold
160VDKB*	Dark Bronze

Options
FATT - Fast Attach Tape



NATIONAL GUARD PRODUCTS, INC. 4985 East Raines Road | Memphis, TN 38118 | Phone: (800) 647-7874 | Fax: (800) 255-7874