5020

TPE Batwing Smoke Seal

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:





Material

Self-Adhesive Thermo-Plastic Elastomer (TPE)

- Good Abrasion Resistance
- Moisture Resistant
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Energy Performance
- Rigid Base with Flexible Elastomeric Fins
- Flame Resistant
- Temperature Range -60°F to 275°F
- Anti-Microbial: Treated with an Anti-Microbial Additive to Inhibit the Growth of Microorganisms
- REACH and RoHS Compliant
- Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- Shelf Life of Adhesive Prior to Installation is One Year When Stored at 75°F and 50% Relative Humidity or Less
- ½" Wide x ½" Tall
- Available in 36", 48", 72", 84", 96" and 108" Lengths

** Anti-microbial not available in clear*



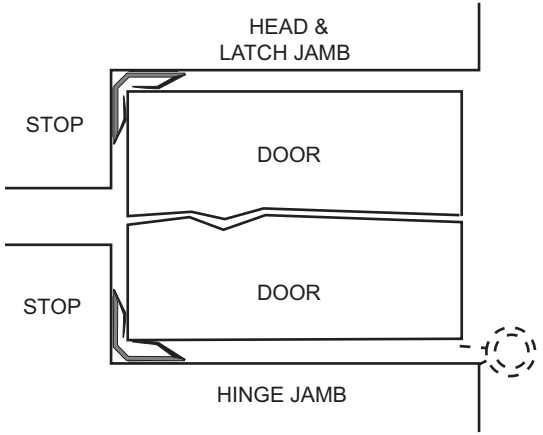

Color

5020B Brown
5020C Charcoal
5020W White
5020CL Clear

STC 37

10C

BHMA CERTIFIED

NGP-GKT-5020-PCS-1120-A

NATIONAL GUARD PRODUCTS, INC. 4985 East Raines Road | Memphis, TN 38118 | Phone: (800) 647-7874 | Fax: (800) 255-7874

ngp.com