720LM/DM

SFIC: Cam Lock
For Small Format Interchangeable Core

BEST

For BEST style interchangeable core cylinders

ANSI/BHMA Grade 1
E07261 | E07271

Woodwork Institute (WI) acknowledged product

GENERAL SPECIFICATIONS

Function: Cam lock
Retrofits: Best 1E7E4
ANSI/BHMA: Passed ANSI/BHMA A156.11 Grade 1 performance requirements. Equivalent to E07261/ E07271.
Cylinder diameter: 1-1/8"
Across flats: 7/8"
Max. material thickness: 1-1/8"
Min. material thickness: 0.08"
Functions: Includes parts for key-retaining or non-key-retaining function.
Cam installation: See our website for cam assembly instructions.
Body: Zinc die cast
Finish: 26D, US26, US3 or US4
Packaged: Packed 10 per box


KEYING INFORMATION

Cores: Not included.
Accepts: Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores
Compatible electronic cylinders: Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

INCLUDES


725-PA plastic thumbturn
720-PL3 stabilizer plate
725-1 spacer to fit 6 or 7 pin cores
720-3-1 short inverted cam
720-3-2 long vertical cam
720-CDLM lost motion cam shifter
720-CDDM key retaining door cam shifter
720-KR key retaining drawer cam shifter

HANDING CHART

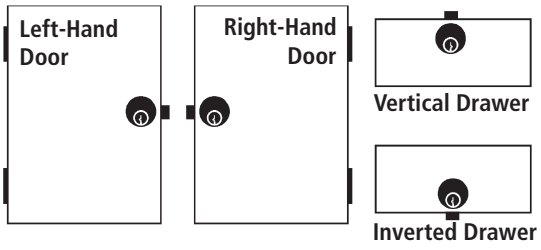



US26D finish




720-PL3
Anti-rotation plate included

AVAILABLE FINISHES



US26D | US26 | US4 | US3

INCLUDED CAMS

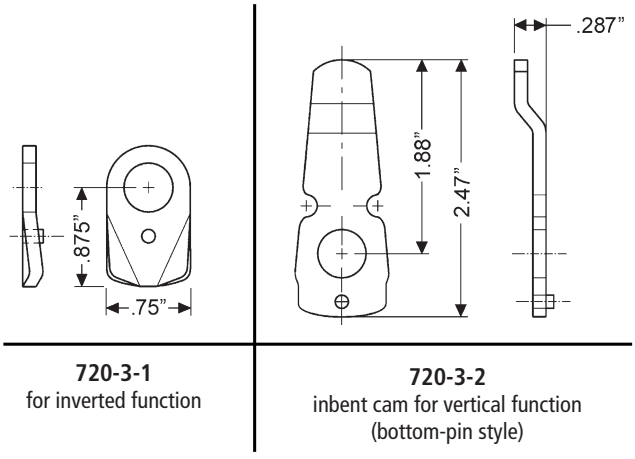

720-3-1
for inverted function

720-3-2
inbent cam for vertical function (bottom-pin style)

WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

OLYMPUS® LOCK INC

720LM/DM


SFIC: Cam Lock

For Small Format
Interchangeable Core


ANSI/BHMA Grade 1
E07261 | E07271
Woodwork Institute (WI) acknowledged product

OPTIONAL ACCESSORIES- *See our website for a complete list of optional components.*


Optional Cams



720-3-3
inbent cam for inverted function

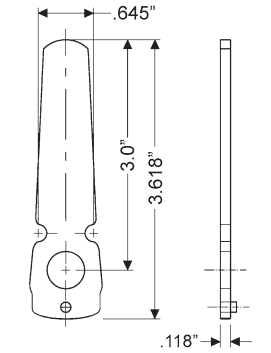

720-3-4
3"straight cam for vertical function



720-3-5
inbent cam for inverted function

CL-MP-118 Double-D Metal Punch

Hole size: Punches a DOUBLE "D" hole size approximately 7/8" wide by 1-1/8" high.



TR200 Series Trim Collars



TR201 1/8"
TR202 1/4"
TR203 3/8"
TR204 5/32"

206/207 Series SFIC Cylinders

Best compatible 6 and 7 pin small format interchangeable core cylinders


BEST compatible interchangeable core cylinders





A	B	C	D	E	F	G	H	
J	K	L	M	Q	1C	1D	KMT300	


DIMENSIONS

MOUNTING CUTOUT









© 2020 Olympus Lock, Inc.

OLYMPUS® LOCK INC