


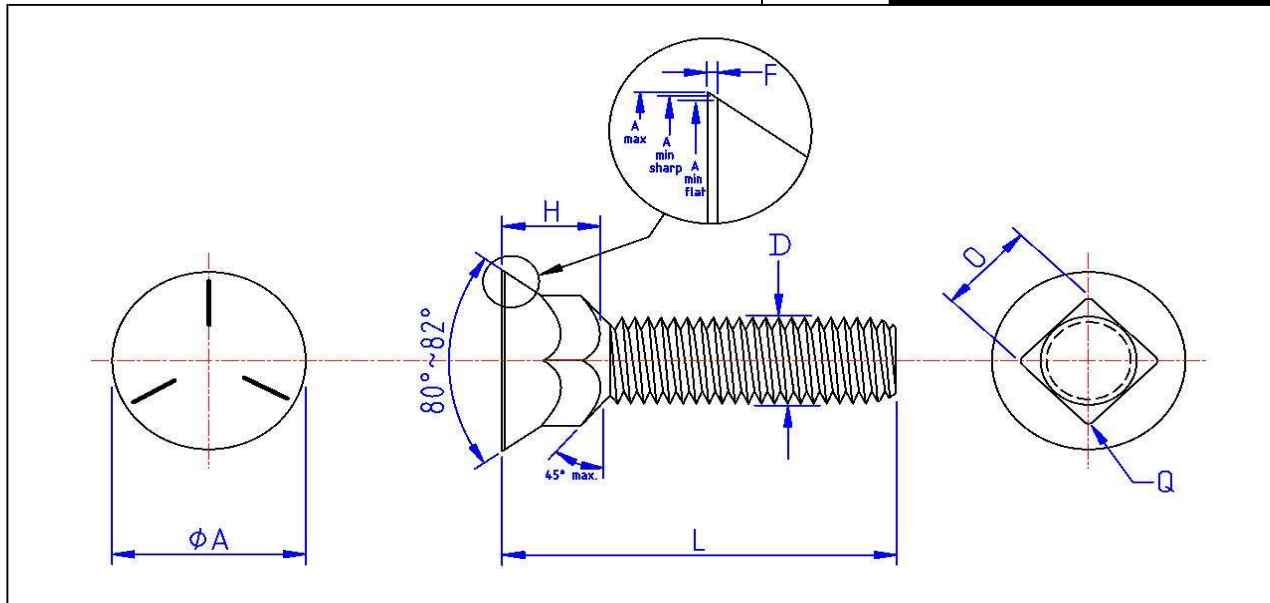

ASME B18.9 (2012)

unit: INCH

Bolt size Diam.	L LENGTH TOLERANCE
1/4" ~ 3/8"	± 0.03
7/16" ~ 1/2"	± 0.06

THREAD LENGTH	FULL THREAD
------------------	-------------

Bolt Size Class 2A		A HEAD DIAMETER	H HEAD HEIGHT	D THREAD DIAM.	F FEED THICKNESS	O SQUARE WIDTH	Q CORNER RADIUS	THREAD PER INCH
3/8	Min	0.781	0.729	0.306	0.364	Max.	0.438	Max.
	Max	0.826	Min. Flat	0.364	0.374	0.058	0.450	0.047
7/16	Min	0.890	0.831	0.349	0.426	Max.	0.500	Max.
	Max	0.945	Min. Flat	0.417	0.436	0.068	0.515	0.047
1/2	Min	1.000	0.924	0.389	0.488	Max.	0.563	Max.
	Max	1.045	Min. Flat	0.461	0.499	0.072	0.578	0.078

No. 3 Head Plow Bolts Over Size Head (Round, Countersunk, Square Neck)

SAE J429 Grade-5, Zinc Plated

Root = Plow Bolt Over Size Zinc

Bulk Label Description:

English: PLOW BOLTS, OVER SIZE HEAD, GR-5, ZINC
 French: BOULON DE CHARRUE TÊTE SURDIMENSIONNÉE, GR-5, ZINC
 Spanish: PERNO DE ARADO, CABEZA DE GRAN TAMAÑO, GRADO 5, ZINC

Date : 17 octobre 2019

Done by : **P.B.**