


ONE-CLICK DRAWER SLIDES


LDSMSC-45-XX SET-UP GUIDE

T-SLOT & PIN MACHINING LOCATIONS


For 250mm/10" Side Mount Slides

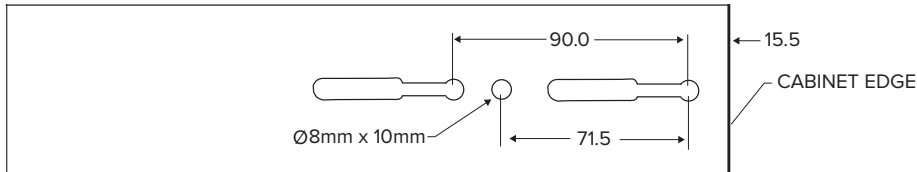


For 300mm/12" Side Mount Slides

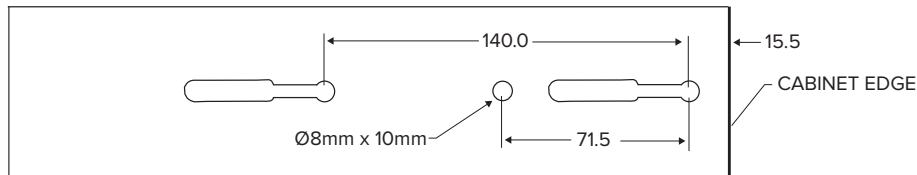


For 350mm/14" Side Mount Slides

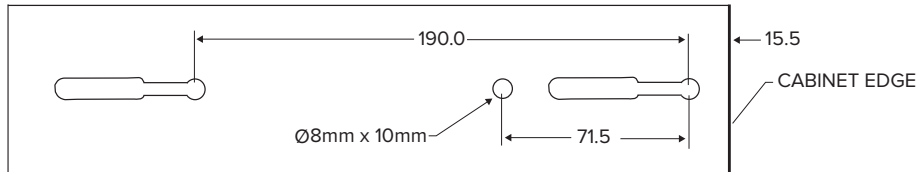


For 400mm/16" Side Mount Slides

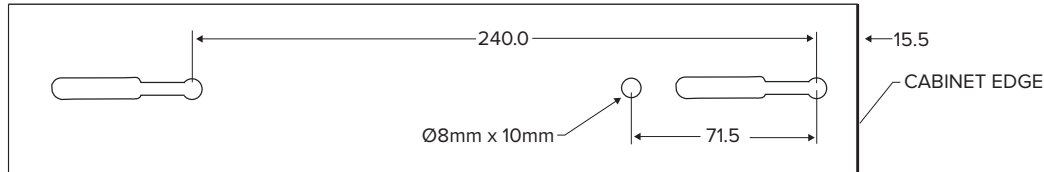


For 450mm/18" Side Mount Slides

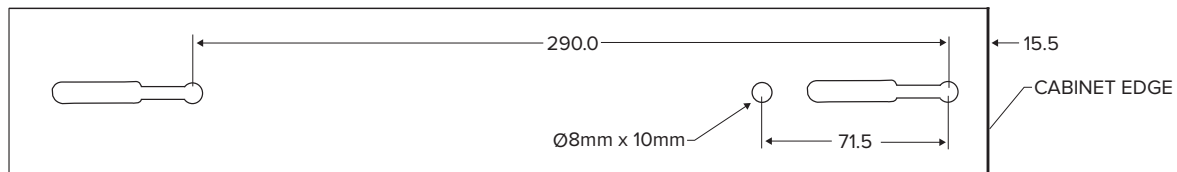

For 500mm/20" Side Mount Slides

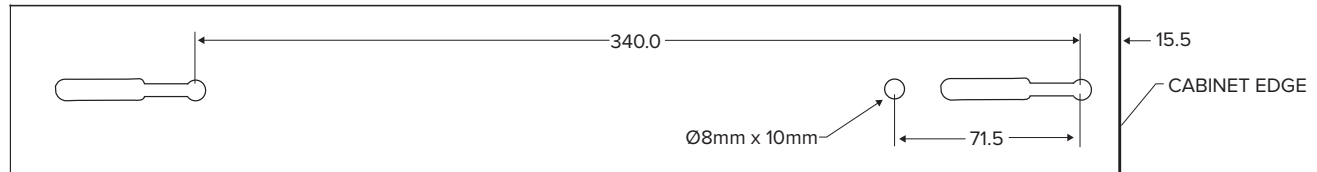

For 550mm/22" Side Mount Slides

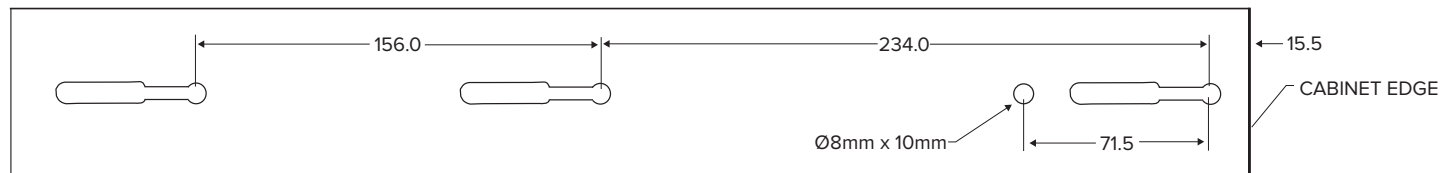


ONE-CLICK DRAWER SLIDES

LDSMSC-45-XX SET-UP GUIDE


ROUTING DETAILS

- ➔ Plunge Cut: Z: -4.5mm, Slot Cut X: 0 to 27mm
- ➔ Plunge Cut: Z: -9.0mm, Slot Cut X: -23 to 27mm


Route Green first, then Gray.
(Allowable depth range is -9.0 to -9.3)



TO DETERMINE DRAWER BOX WIDTH:

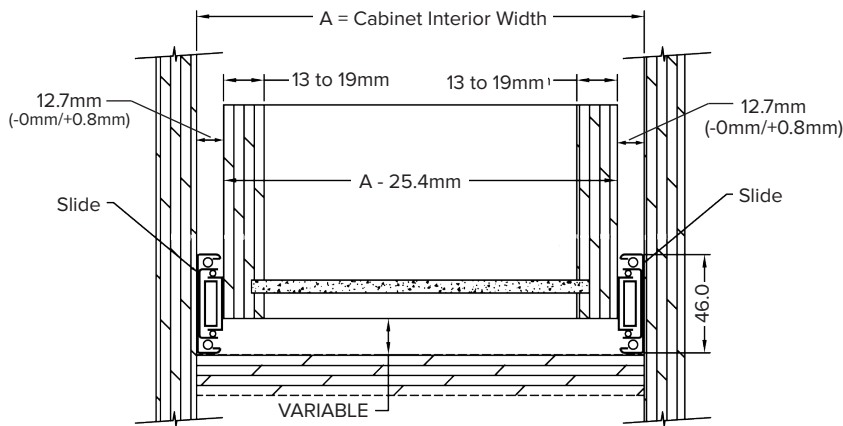

DRAWER BOX PIN MACHINING LOCATIONS:

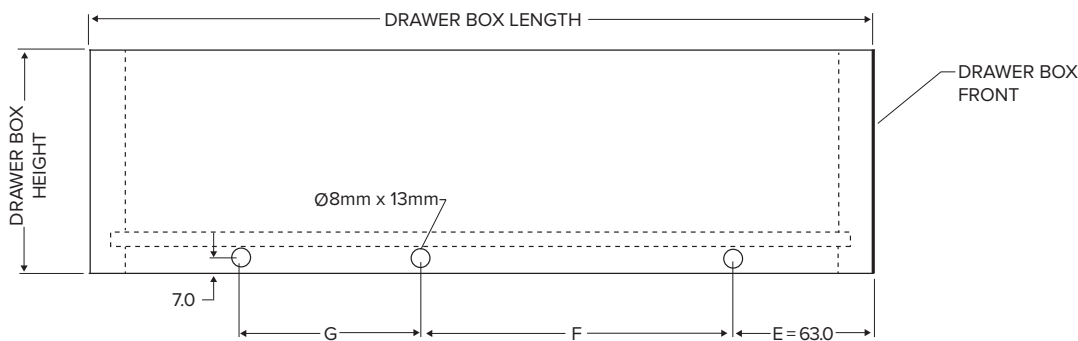

DRAWER SLIDE P/N	SIZE		E	F	G
LDSMSC-45-10	10"	250mm	63	139	--
LDSMSC-45-12	12"	300mm	63	158	81
LDSMSC-45-14	14"	350mm	63	209	--
LDSMSC-45-16	16"	400mm	63	143	117
LDSMSC-45-18	18"	450mm	63	158.5	150
LDSMSC-45-20	20"	500mm	63	194	167
LDSMSC-45-22	22"	550mm	63	228	182



A silent, soft-closing system that is suitable for all drawer applications. It uses Lockdowel's patented invisible fasteners and offers excellent stability.

SPECIFICATIONS

- Load Rating: 45kg
- Full extension
- Extremely fast assembly
- More than 50,000 cycles test time
- ANSI & BIFMA tested and approved