

500LTS2SXX

Pneumatic Lift Desk Assembly Instructions




500LTS2S90



500LTS2S30

HARDWARE				
 983094 with brake	a x 2	 983014	g x 1	
 983095	b x 2	 983093	$\frac{7}{8}$ "	h x 3
Ø10  690003	c x 1	 690004	i x 1	
Ø10  983076	d x 1	Ø8  983096	j x 4	
 983058	$\frac{4}{5}$ " e x 4	Ø8  983097	k x 4	
 983008	f x 1	 983056	m x 1	

PARTS LIST AND INSTRUCTIONS

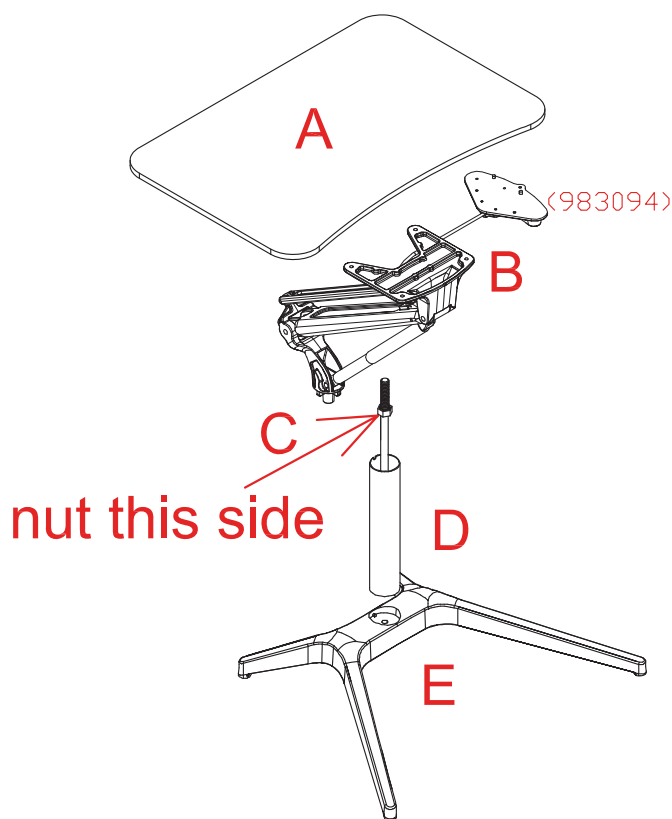




Maintenance!

Melamine & Lacquer surfaces: Clean using a mild non detergent soap solution and wipe off excess with a dry soft cloth. Avoid placing sharp items directly on surface.

Aluminum and other metal parts: Clean using a mild non detergent soap solution and wipe off with a clean damp cloth. Use rubbing alcohol for stubborn stains.

Never use solvents for cleaning furniture.


Location: Avoid placing furniture in moist areas or in direct sunlight.

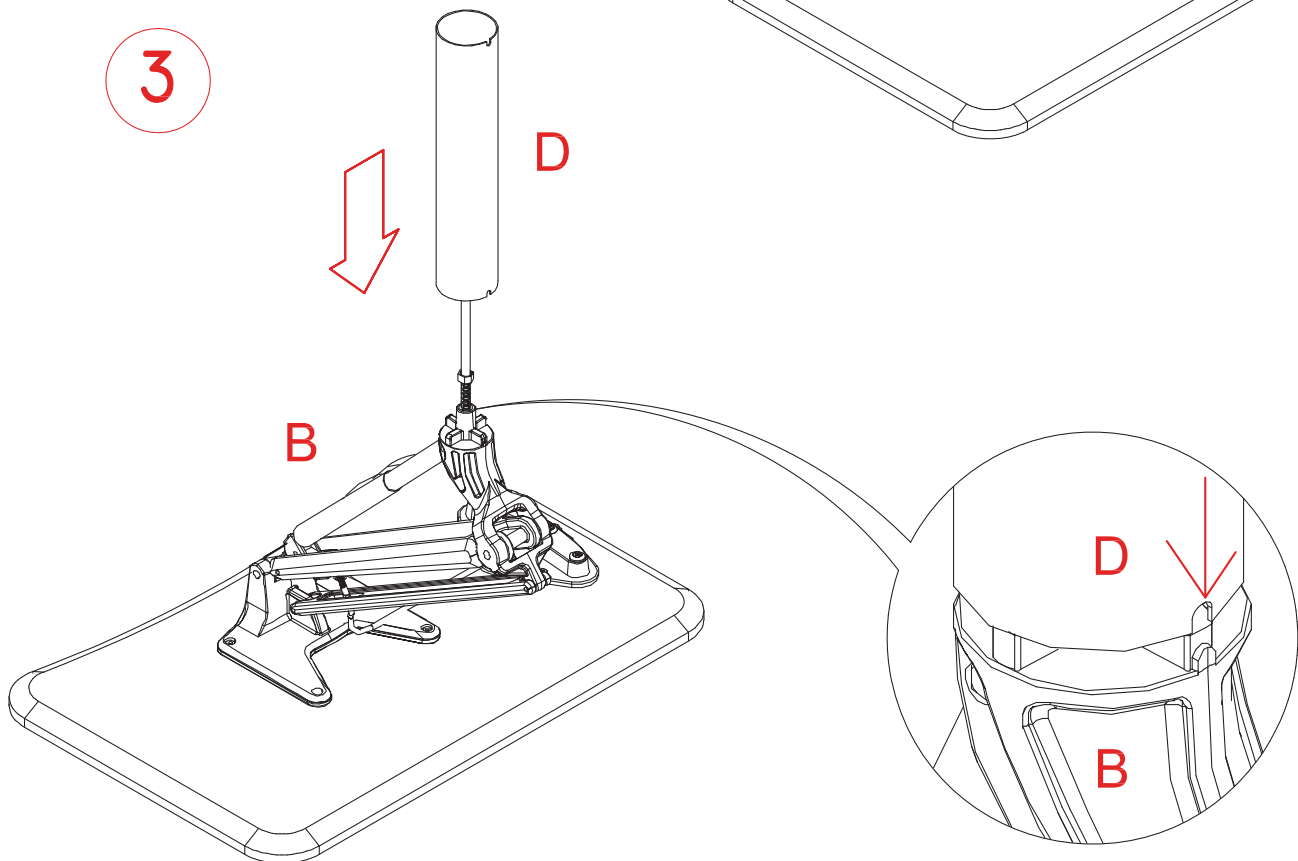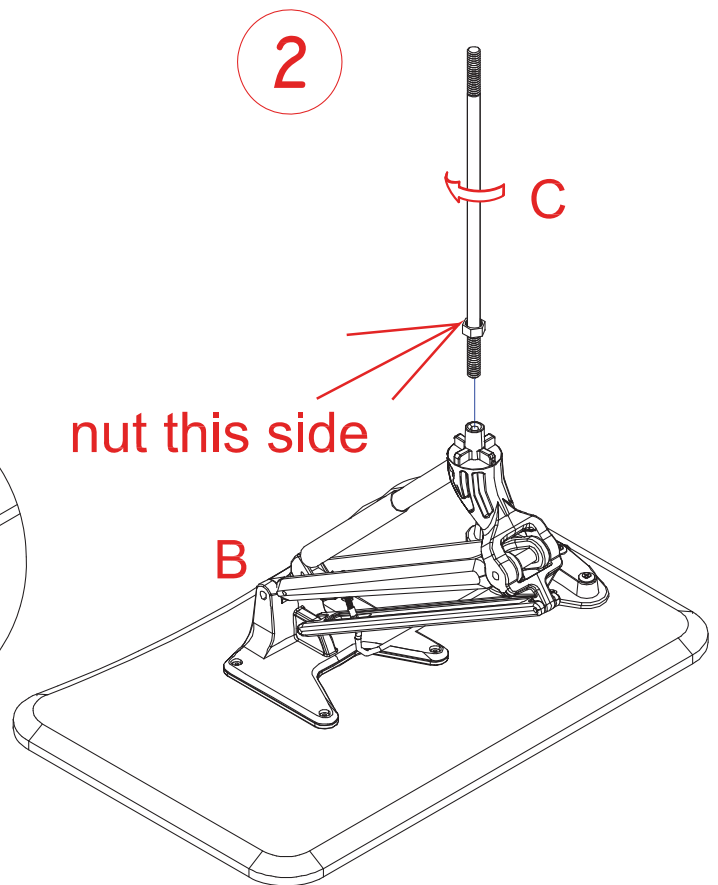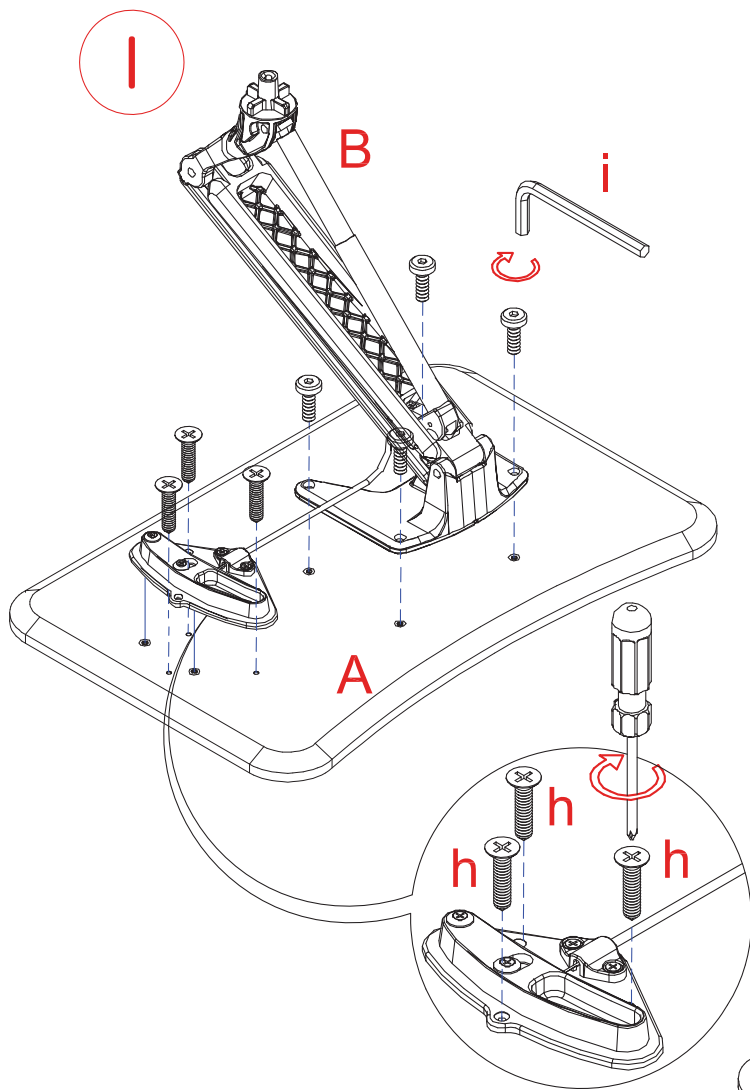

a(with brake)


4

a(with brake)

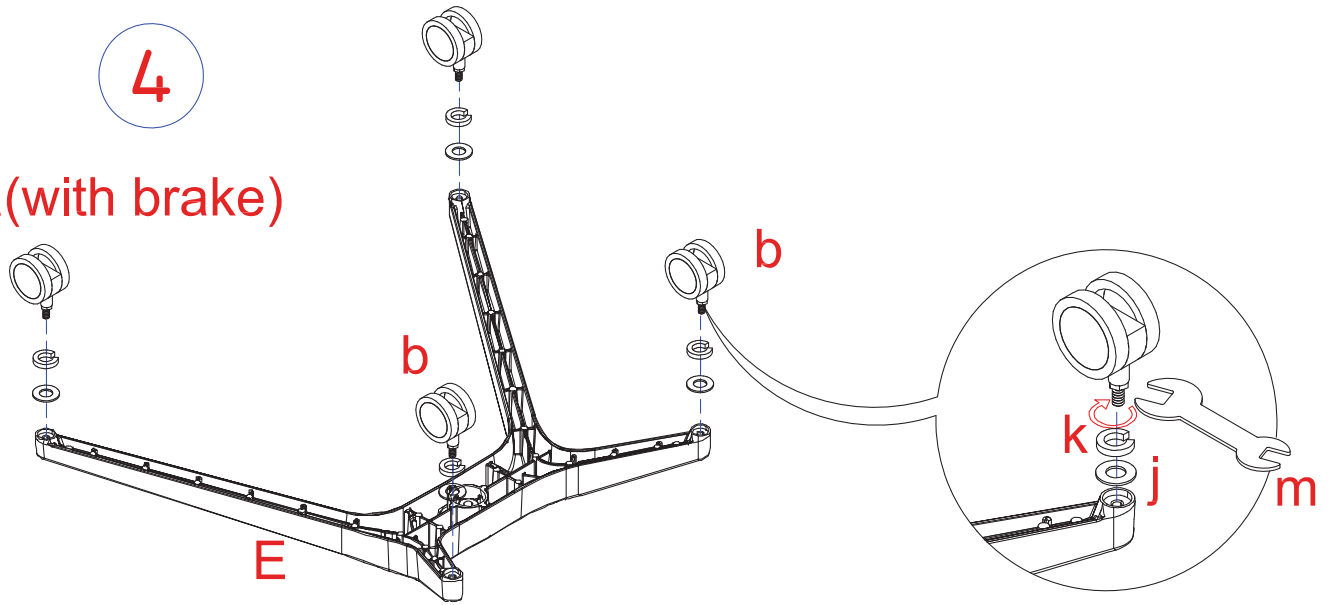


5

Important: Insert phillips screw driver to tight nut securely!!

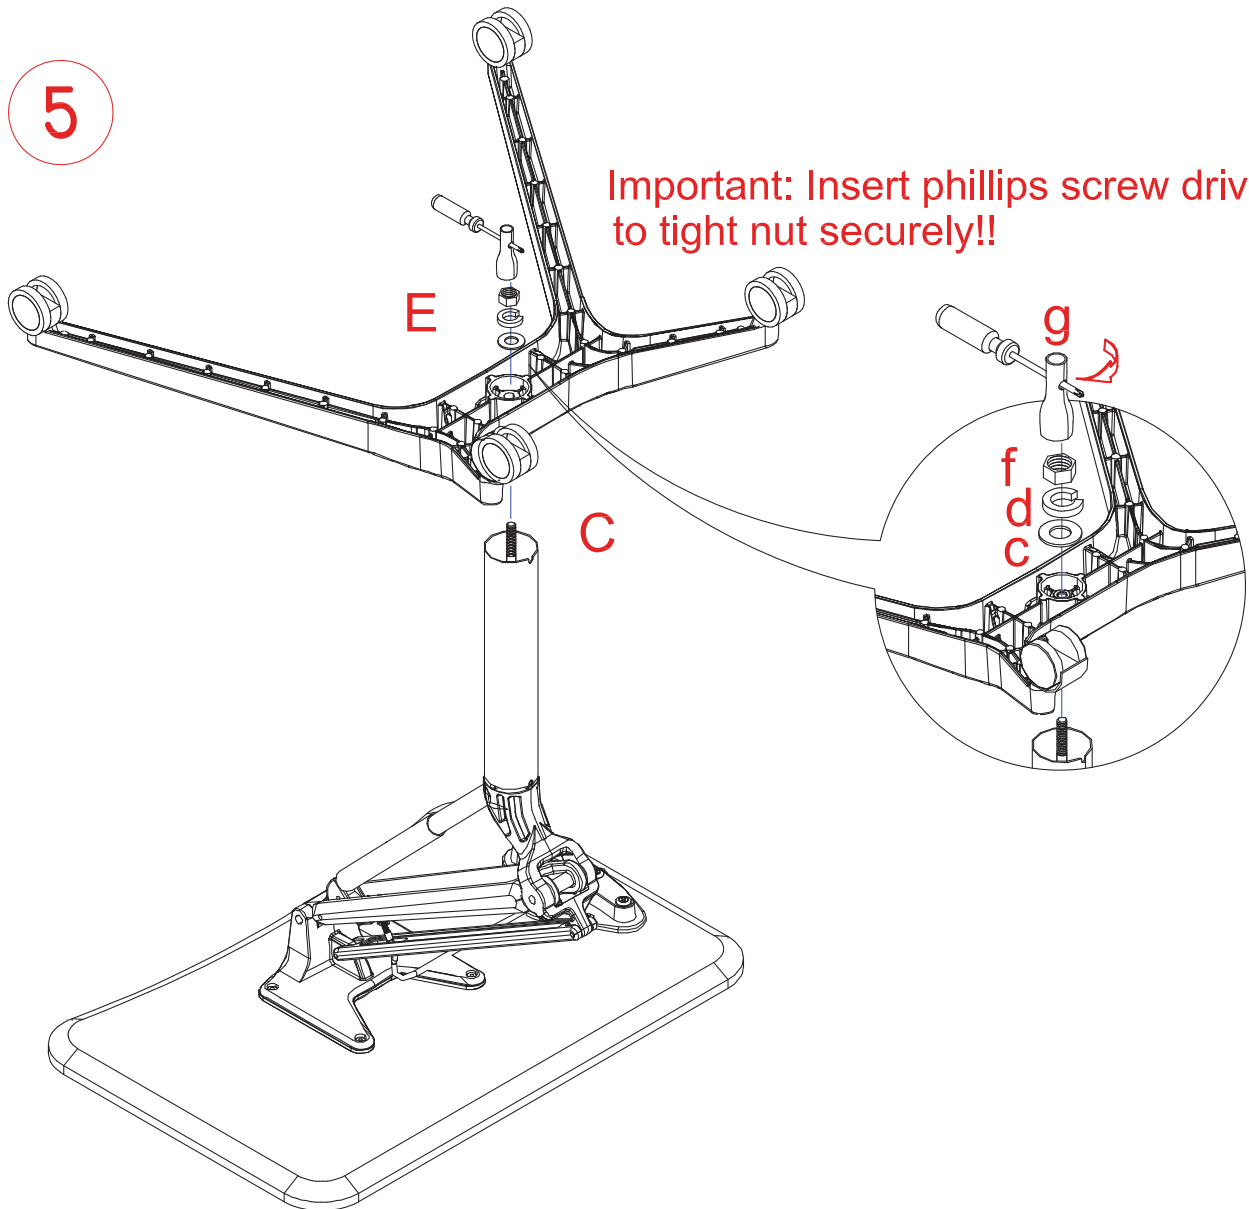


6

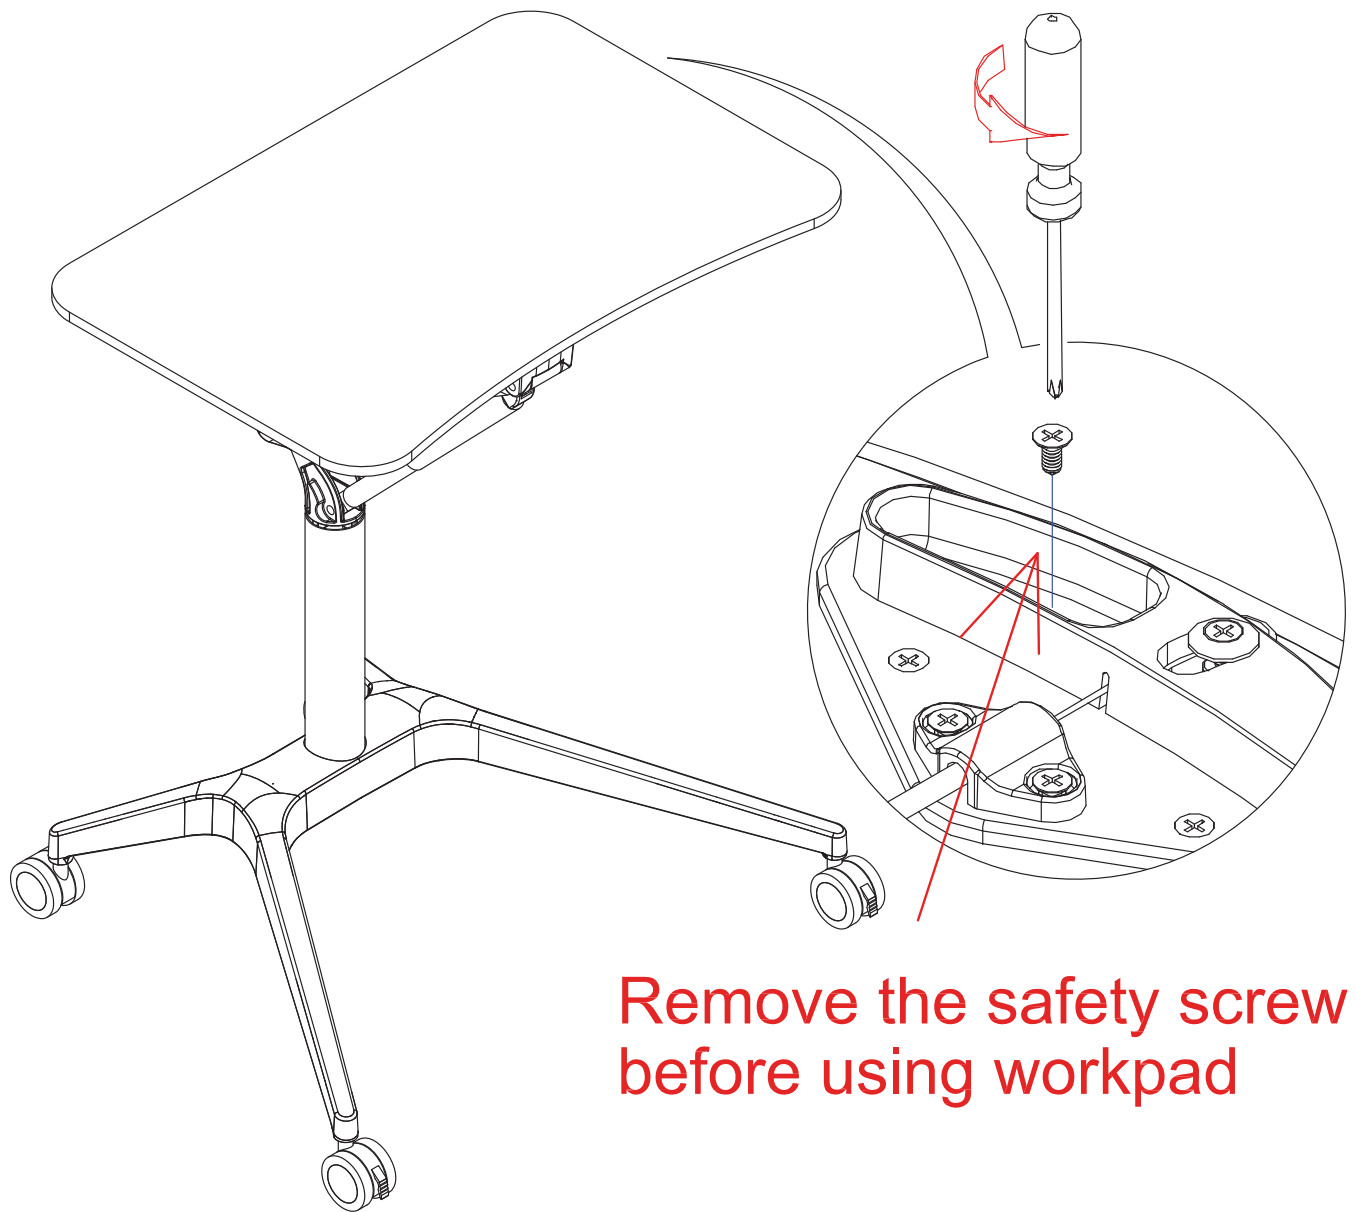

Remove the safety screw
before using workpad

7

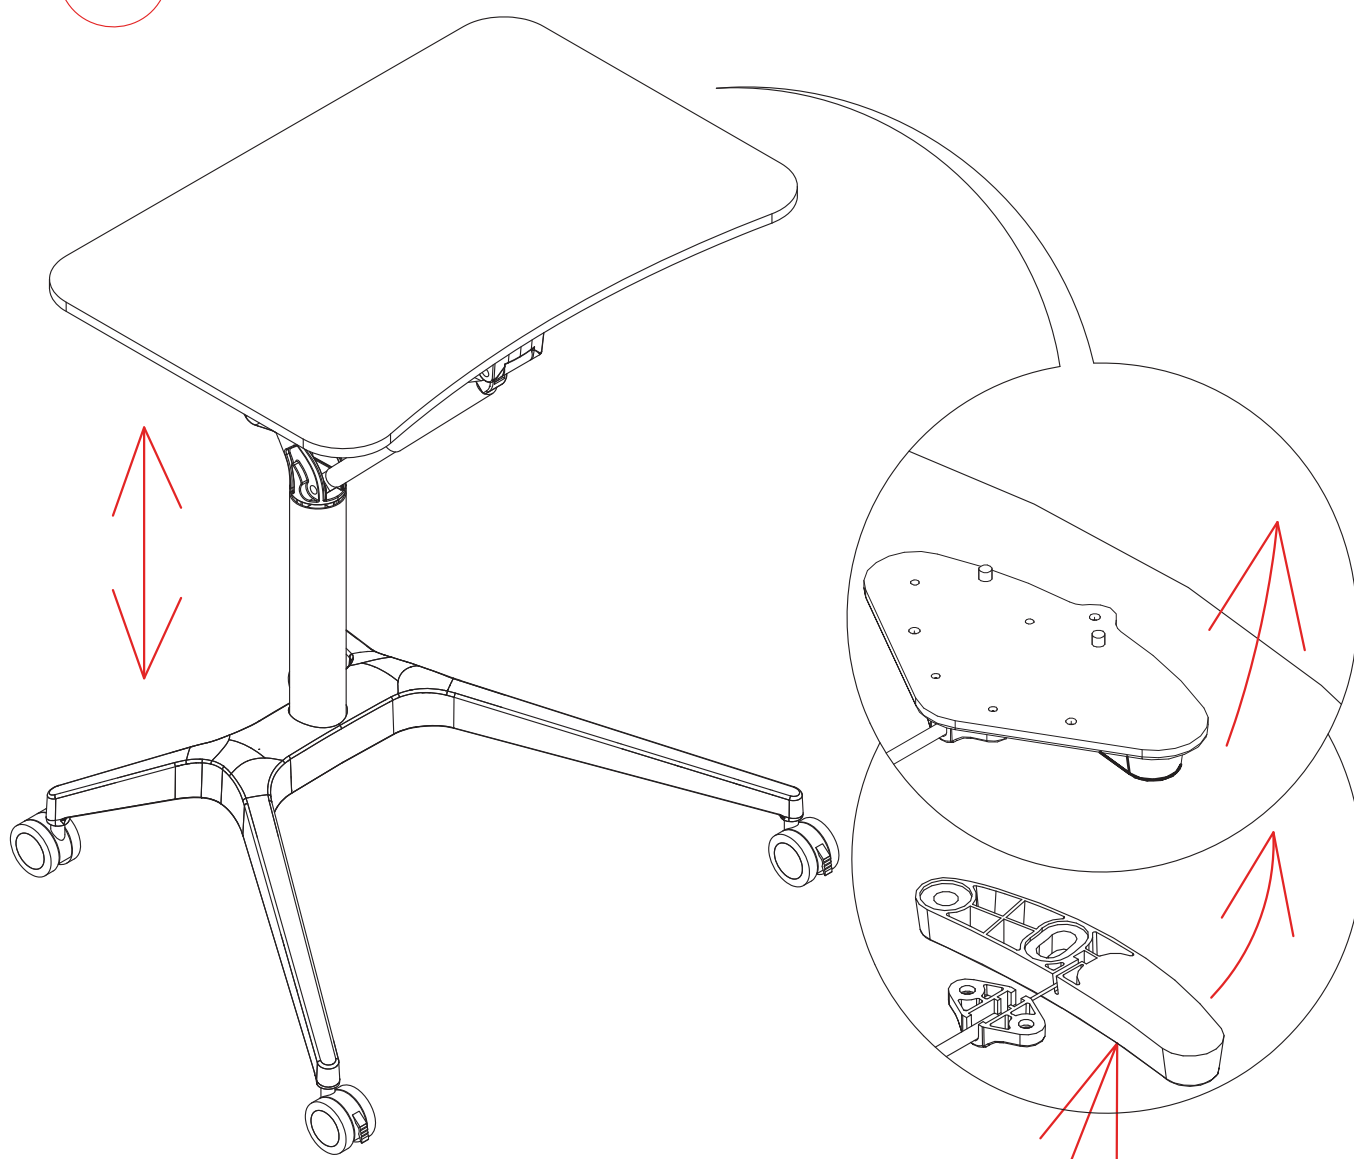

To raise table: Pull the handle out !

To lower table: Pull the handle out and push down on table top simultaneously !