


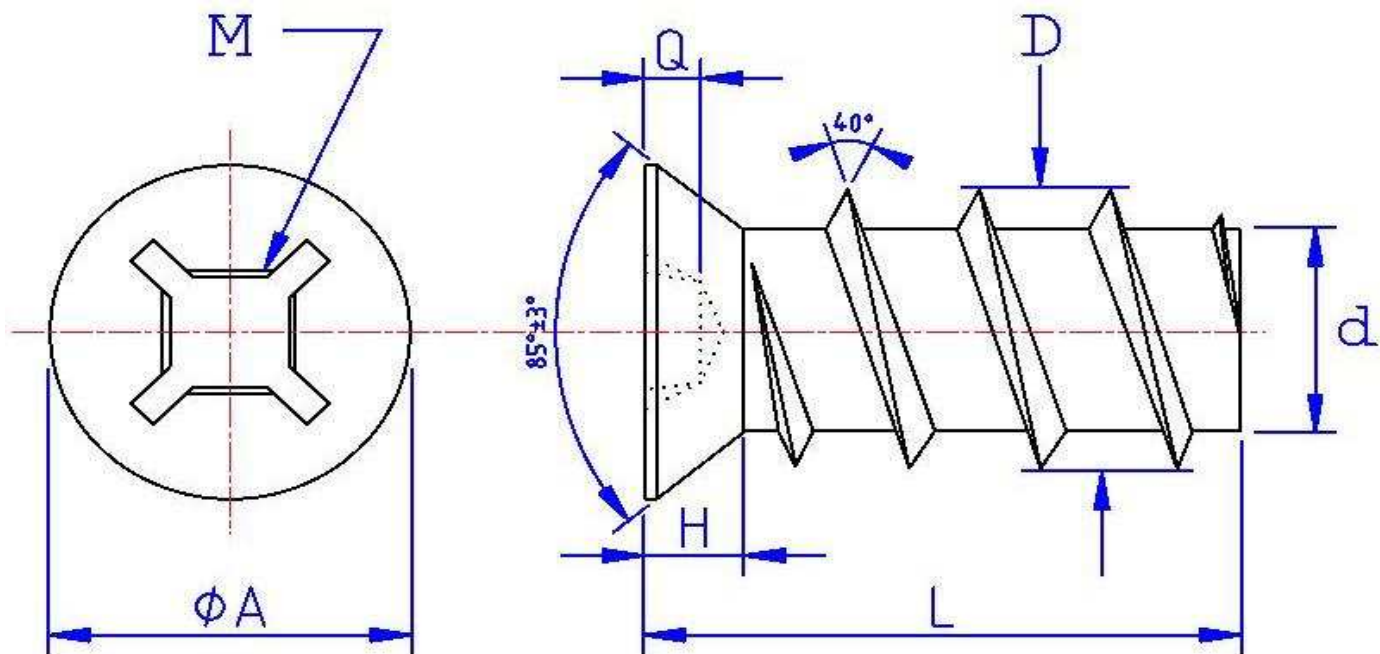

unit: MM

L LENGTH TOLERANCE	11.5mm	+ 0
		- 0.5

THREAD	FULL THREAD
---------------	--------------------

SCREW	M PUNCH		Q DRIVE DEPTH	H HEAD HEIGHT	A HEAD DIAM.	d MINOR DIAM.	D THREAD DIAM.	THREAD PITCH MM	
M6.3	# 2	Min	1.53	1.90	7.50	4.00	6.10	2.2	
		Max	1.90	2.10	8.00	4.20	6.30		

Flat Countersunk Head, Quadrex #2, Euro Screws, Stainless Steel (304)

Date : 6 novembre 2017

Done by : P.B.