

UNDER CABINET LIGHTING

ATOM PUCK LED

Control: Switchex® LED Dimmer/Power Supply



POWER SUPPLY INSTALLATION: HARDWARE

- Kits recommended for a 48" counter.
- For longer counters, add a puck light every 15" CTC.
- The Atom can be recessed or surface mounted using the trim ring (sold separately).
- 78" power cable is pre-wired to the Atom.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Switchex® mounts in a standard in-wall switch box, accepts 120 Vac and converts to low voltage dc.

LED




Atom



Trim ring
surface mount application

POWER SUPPLY & CONTROL

All-in-one
led dimmer
and power
supply



Face plate
finishes, included



Glossy
White



Glossy
Light Almond



Glossy
Dark Brown

Face plate finish,
sold separately



Glossy Black
No. 445090

STARTER KIT


Order the quantities below for each part number to complete 1 kit shown in the installation layout.



Qty.	No.	Description
3	126122900	Atom LED puck light 4000 K warm white, black finish, 24V
3	12612900	Trim ring for surface mount, black finish
1	D124100	Switchex® LED dimmer and power supply, 100W, 24V
1	24066562	Extension female connection to terminal, white connector 6" (150 mm), 24V
1	245903832	Micro adapter 3-way distributor with 59" (1500 mm) power cable, 24V
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

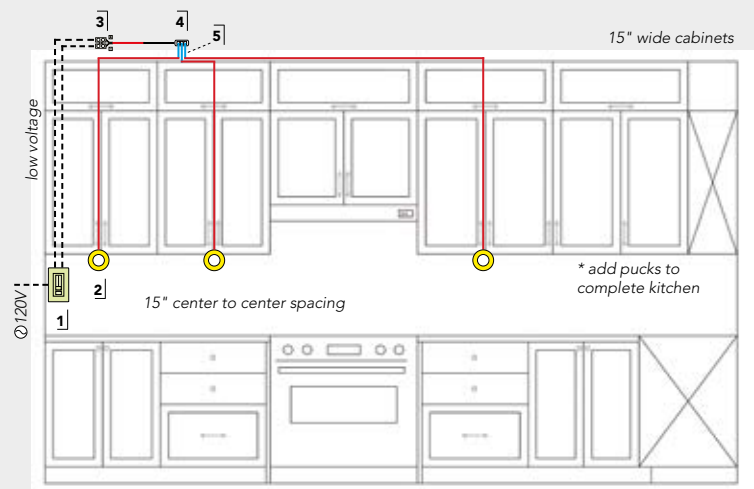

1. Switchex® dimmer and power supply, D124100.
2. Atom light, 126122900, optional surface mount trim ring, 12612900.
3. Connection to terminal, 24066562.
4. Adapter 3-way distributor, 245903832.
5. Extension cable, 247901562.

----- 120V and low voltage wire
supplied by others