UNDER CABINET LIGHTING

ATOM PUCK LED

Control: Switchex® LED Dimmer/Power Supply



POWER SUPPLY INSTALLATION: HARDWIRE

- Kits recommended for a 48" counter.
- For longer counters, add a puck light every 15" CTC.
- The Atom can be recessed or surface mounted using the trim ring (sold separately).
- 78" power cable is pre-wired to the Atom.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Switchex® mounts in a standard in-wall switch box, accepts 120 Vac and converts to low voltage dc.

LED



Atom




Trim ring
surface mount application

POWER SUPPLY & CONTROL

All-in-one led dimmer and power supply





Face plate finishes, included



Glossy White | *Glossy Light Almond* | *Glossy Dark Brown*

Face plate finish, sold separately



Glossy Black No. 445090

STARTER KIT


120V

Order the quantities below for each part number to complete 1 kit shown in the installation layout.

Qty.	No.	Description
3	126124900	Atom LED puck light 4000 K warm white, black finish, 24V
3	12612900	Trim ring for surface mount, black finish
1	D124100	Switchex® LED dimmer and power supply, 100W, 24V
1	24066562	Extension female connection to terminal, white connector 6" (150 mm), 24V
1	245903832	Micro adapter 3-way distributor with 59" (1500 mm) power cable, 24V
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

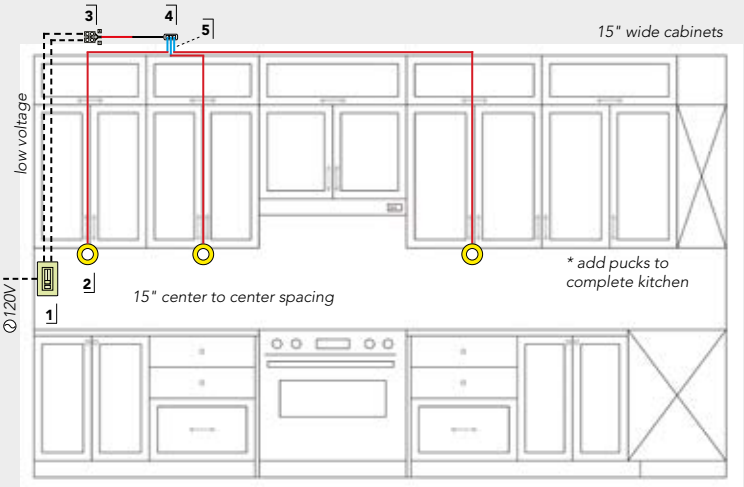

1. Switchex® dimmer and power supply, D124100.
2. Atom light, 126124900, optional surface mount trim ring, 12612900.
3. Connection to terminal, 24066562.
4. Adapter 3-way distributor, 245903832.
5. Extension cable, 247901562.

--------- *120V and low voltage wire supplied by others*