UNDER CABINET LIGHTING

ATOM PUCK LED

Control: Switchex® LED Dimmer/Power Supply



POWER SUPPLY INSTALLATION: HARDWIRE

- Kits recommended for a 48" counter.
- For longer counters, add a puck light every 15" CTC.
- The Atom can be recessed or surface mounted using the trim ring (sold separately).
- 78" power cable is pre-wired to the Atom.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Switchex® mounts in a standard in-wall switch box, accepts 120 Vac and converts to low voltage dc.

LED



Atom




Trim ring
surface mount application

POWER SUPPLY & CONTROL

All-in-one led dimmer and power supply





Face plate finishes, included

Glossy White	Glossy Light Almond	Glossy Dark Brown

Face plate finish, sold separately

Glossy Black No. 445090

STARTER KIT


120V

Order the quantities below for each part number to complete 1 kit shown in the installation layout.

Qty.	No.	Description
3	126124195	Atom LED puck light 4000 K warm white, satin nickel finish, 24V
3	12612195	Trim ring for surface mount, satine nickel finish
1	D124100	Switchex® LED dimmer and power supply, 100W, 24V
1	24066562	Extension female connection to terminal, white connector 6" (150 mm), 24V
1	245903832	Micro adapter 3-way distributor with 59" (1500 mm) power cable, 24V
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

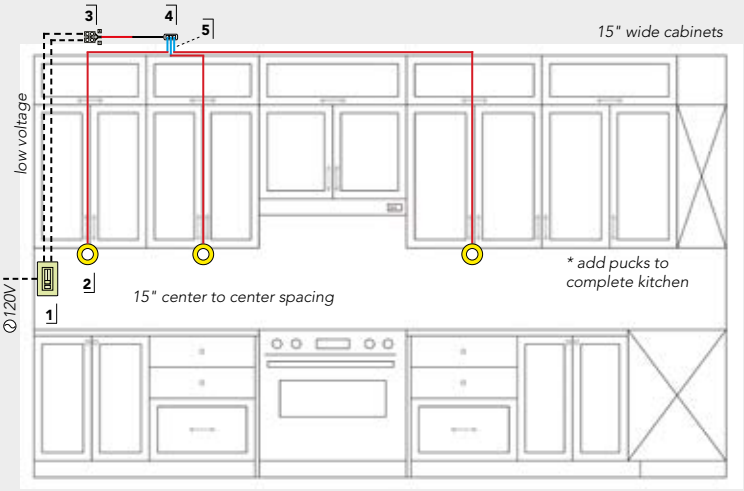

1. Switchex® dimmer and power supply, D124100.
2. Atom light, 126124195, optional surface mount trim ring, 12612195.
3. Connection to terminal, 24066562.
4. Adapter 3-way distributor, 245903832.
5. Extension cable, 247901562.

---------- *120V and low voltage wire supplied by others*