APEX RECESSED PROFILE

Control: X-Driver Remote



POWER SUPPLY INSTALLATION: PLUG-IN

- Apex profile, available in two lengths: 78 3/4" (2 m) L and 118 1/8" (3 m) L, can be cut easily with a miter saw.
- Apex profile dimensions: 3/8" (9 mm) W x 7/16" (10.5 mm) H.
- FlexyLED HE6 PW is a LED strip with 280 LED/m on a circuit 1/4" (6 mm) W.
- FlexyLED HE6 PW available in fixed lengths (trimmable): 19 11/16" (500 mm), 39 3/8" (1000 mm), 59 1/16" (1500 mm), 78 3/4" (2000 mm), 98 7/16" (3000 mm).
- Kits recommended for a 96" counter.
- 78" power cable is pre-wired to the FlexyLED HE6 PW.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.

LED



Apex profile



FlexyLED HE6 PW

POWER SUPPLY





Power cable

CONTROL



Multi-channel dimmer remote



Module CM2 (RF)


STARTER KIT

Order the quantities below for each part number to complete 1 kit shown in the installation layout.

Qty.	No.	Description
4	16612219	FlexyLED HE6 PW, 3000 K warm white, 19 11/16" (500 mm) length, 5W, 24V
1	3055379	Apex recessed profile, 78 3/4" length, polycarbonate
4	3055304	Apex end caps, polycarbonate, 2-pack
1	XDRIVER2430	X-Driver power supply, 30W, 24V
1	1650301	CM2-XD RF control module
1	1650201	RC3 3-Channel dimmer remote
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

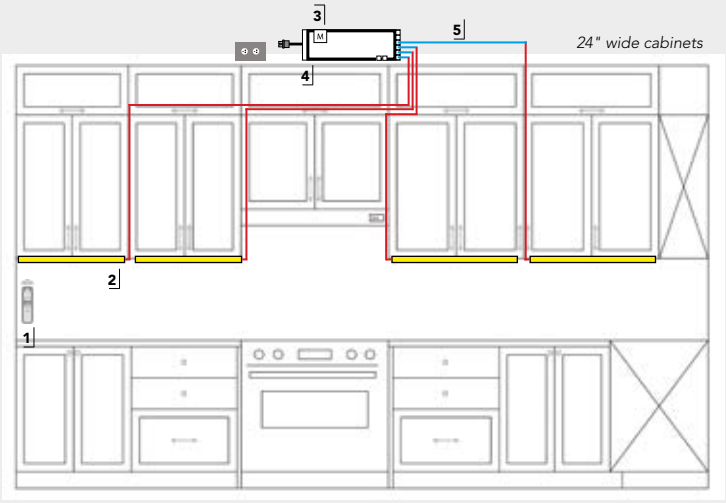

1. Remote, 1650201.
2. Apex profile, 3055379 and FlexyLED HE6 PW, 16612219.
3. Control module (CM2-XD), 1650301.
4. X-Driver power supply, XDRIVER2430.
5. Extension cable, 247901562.