UNDER CABINET LIGHTING

APEX RECESSED PROFILE

Control: Switchex® LED Dimmer/Power Supply



POWER SUPPLY INSTALLATION: HARDWIRE

- Apex profile, available in two lengths: 78 3/4" (2 m) L and 118 1/8" (3 m) L, can be cut easily with a miter saw.
- Apex profile dimensions: 3/8" (9 mm) W x 7/16" (10.5 mm) H.
- FlexyLED HE6 PW is a LED strip with 280 LED/m on a circuit 1/4" (6 mm) W.
- FlexyLED HE6 PW available in fixed lengths (trimmable): 19 11/16" (500 mm), 39 3/8" (1000 mm), 59 1/16" (1500 mm), 78 3/4" (2000 mm), 98 7/16" (3000 mm).
- Kits recommended for a 96" counter.
- 78" power cable is pre-wired to the FlexyLED HE6 PW.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Switchex® mounts in a standard in-wall switch box, accepts 120 Vac and converts to low voltage dc.

LED



Apex profile




FlexyLED HE6 PW

POWER SUPPLY & CONTROL

All-in-one led dimmer and power supply





Face plate finishes, included



Glossy White | *Glossy Light Almond* | *Glossy Dark Brown*

Face plate finish, sold separately



Glossy Black No. 445090

STARTER KIT


120V

Order the quantities below for each part number to complete 1 kit shown in the installation layout.

Qty.	No.	Description
4	16612219	FlexyLED HE6 PW, 3000 K warm white, 19 11/16" (500 mm) length, 5W, 24V
1	3055379	Apex recessed profile, 78 3/4" length, polycarbonate
4	3055304	Apex end caps, polycarbonate, 2-pack
1	D124100	Switchex® LED dimmer and power supply, 100W, 24V
1	24066562	Extension female connection to terminal, white connector 6" (150 mm), 24V
1	245906832	Micro adapter 6-way distributor with 59" (1500 mm) power cable, 24V
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

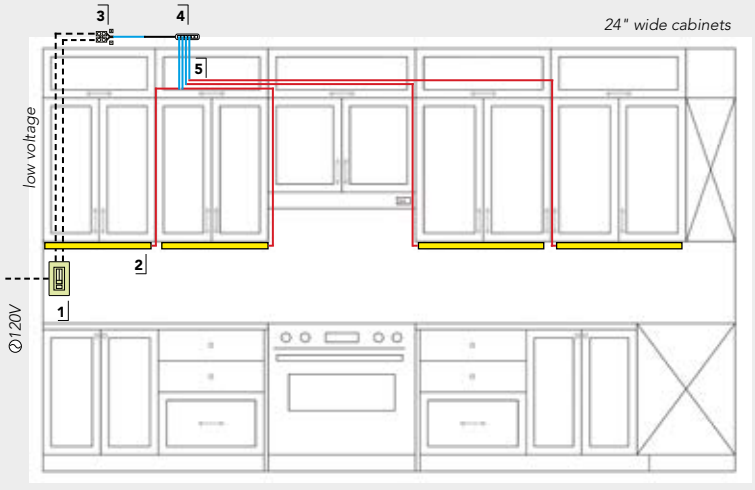

1. Switchex® dimmer and power supply, D124100.
2. Apex profile, 3055379 and FlexyLED HE6 PW, 16612219.
3. Connection to terminal, 24066562.
4. Adapter 6-way distributor, 245906832.
5. Extension cable, 247901562.

---------- *120V and low voltage wire supplied by others*