

UNDER CABINET LIGHTING

BLADE SURFACE PROFILE

Control: Switchex® LED Dimmer/Power Supply



POWER SUPPLY INSTALLATION: HARDWARE

- Blade profile, 78 3/4" (2 m) L, easily cut with a miter saw.
- Blade profile dimensions: 13/16" (21 mm) W x 3/8" (10 mm) H.
- FlexyLED UHE6B PW is a LED strip with 280 LED/m on a circuit 1/4" (6 mm) W.
- FlexyLED UHE6B PW available in fixed lengths (trimmable): 19 11/16" (500 mm), 39 3/8" (1000 mm), 59 1/16" (1500 mm), 78 3/4" (2000 mm).
- Kits recommended for a 96" counter.
- 78" power cable is pre-wired to the FlexyLED UHE6B PW.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Switchex® mounts in a standard in-wall switch box, accepts 120 Vac and converts to low voltage dc.

LED



POWER SUPPLY & CONTROL



Face plate finishes, included



Face plate finish, sold separately



STARTER KIT


Order the quantities below for each part number to complete 1 kit shown in the installation layout.



Qty.	No.	Description
4	1670240512419	FlexyLED UHE6B PW, 4000 K warm white, 19 11/16" (500 mm), 5W, 24V
1	4123079010	Blade aluminum surface profile, 78 3/4" length, aluminum finish
4	4123600	Blade mounting clips, 2-pack
4	4123010	Blade end caps, aluminum finish 2-pack
1	D124100	Switchex® LED dimmer and power supply, 100W, 24V
1	24066562	Extension female connection to terminal, white connector 6" (150 mm), 24V
1	245906832	Micro adapter 6-way distributor with 59" (1500 mm) power cable, 24V
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

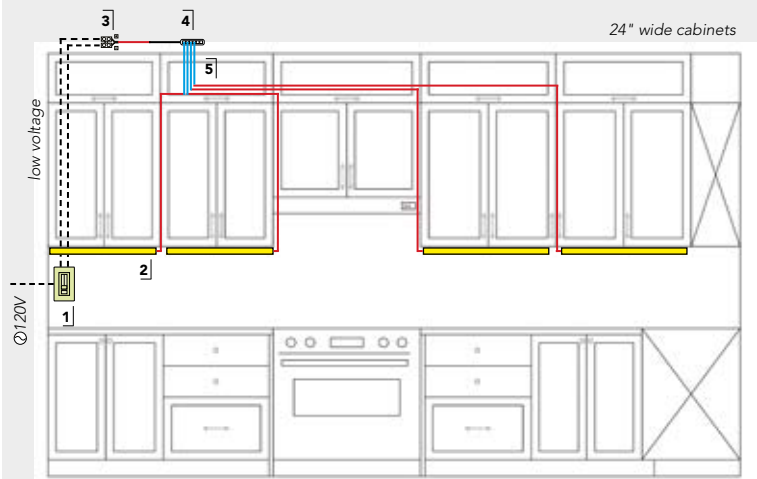

1. Switchex® dimmer and power supply, D124100.
2. Blade profile, 4123079010 and FlexyLED UHE6B PW, 1670240512419.
3. Connection to terminal, 24066562.
4. Adapter 6-way distributor, 245906832.
5. Extension cable, 247901562.

----- 120V and low voltage wire supplied by others