

>> Full Extension Slide >> 100lbs

Product

3M01



Full Extension
Ball Bearing Slide
-Standard Type



Specifications



- **Length:** 250mm to 1000mm (10" to 40")
- **Travel:** Full Extension
- **Side Space:** 12.7mm (+0.5mm-0mm)
- **Height:** 45.6mm (1.80")
- **Max. Loading:** 45 kg (100 lb)
- **Mount:** Side Mount
- **Disconnect:** Lever Disconnect
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel

Packing


- Unit Packed in 15 pairs/carton
- Bulk Packed in 40 pcs/carton for cabinet member 100 pcs/carton for drawer member

Applications

- Kitchen Furniture, Home Cabinets, Box Drawers, Desk and Storage Drawers and File Drawers

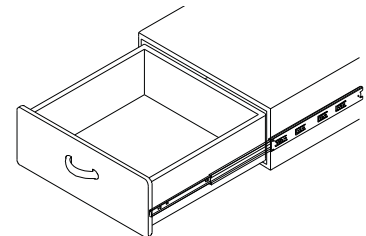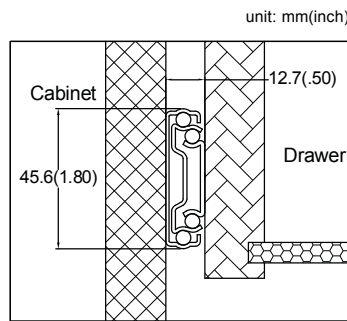

Dimension Specifications

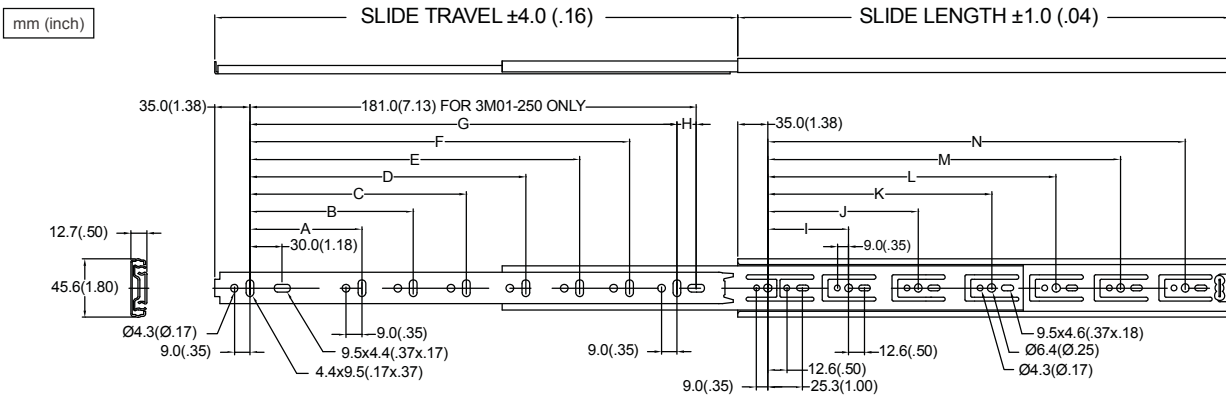

ITEM NO.	SLIDE LENGTH mm (inch)	SLIDE TRAVEL mm (inch)	LOADING CAPACITY kg (lb) / pair	HOLES POSITION mm (inch)													
				A	B	C	D	E	F	G	H	I	J	K	L	M	N
3M01-250	250.0 (9.84)	256.7 (10.11)	22.7 (50.0)	96.0 (3.78)	—	—	—	—	—	—	—	—	—	—	—	—	160.0 (6.30)
3M01-300	300.0 (11.81)	306.7 (12.07)	27.3 (60.0)	128.0 (5.04)	—	—	—	—	—	220.0 (8.66)	11.0 (0.43)	128.0 (5.04)	—	—	—	—	224.0 (8.82)
3M01-350	350.0 (13.78)	356.7 (14.04)	34.1 (75.0)	128.0 (5.04)	—	—	—	—	—	270.0 (10.63)	11.0 (0.43)	128.0 (5.04)	—	—	—	—	224.0 (8.82)
3M01-400	400.0 (15.75)	406.7 (16.01)	45.4 (100.0)	128.0 (5.04)	—	—	—	—	—	320.0 (12.60)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	320.0 (12.60)
3M01-450	450.0 (17.72)	456.7 (17.98)	45.4 (100.0)	128.0 (5.04)	320.0 (12.60)	—	—	—	—	370.0 (14.57)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	352.0 (13.86)
3M01-500	500.0 (19.69)	506.7 (19.95)	45.4 (100.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	—	—	—	416.0 (16.38)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	416.0 (16.38)
3M01-550	550.0 (21.65)	556.7 (21.92)	45.4 (100.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	—	—	470.0 (18.53)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	448.0 (17.64)
3M01-600	600.0 (23.62)	606.7 (23.89)	38.6 (85.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	—	—	520.0 (20.47)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	480.0 (18.90)
3M01-650	650.0 (25.59)	656.7 (25.85)	31.8 (70.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	—	—	570.0 (22.44)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-700	700.0 (27.56)	706.7 (27.82)	27.2 (60.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	—	—	620.0 (24.41)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-750	750.0 (29.53)	756.7 (29.79)	21.8 (48.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	544.0 (21.42)	—	—	670.0 (26.38)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-800	800.0 (31.50)	806.7 (31.76)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	544.0 (21.42)	—	—	720.0 (28.35)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	672.0 (26.46)
3M01-850	850.0 (33.46)	856.7 (33.73)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	770.0 (30.31)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-900	900.0 (35.43)	906.7 (35.70)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	820.0 (32.28)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-950	950.0 (37.40)	956.7 (37.67)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	870.0 (34.25)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-A00	1000.0 (39.37)	1006.7 (39.63)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	832.0 (32.76)	920.0 (36.24)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	736.0 (28.98)	864.0 (34.02)