


# Point Pod Pop Up PPCV815


## Outlet Dimensions

Tower Height	6.7" [170mm]
Base Height	16.15" [410mm]
Available space for countertop	Up to 1.18" [30mm]
Inner Cup Diameter	3.66" [93mm]
Cut Out Size	4" [102mm]
Minimum Space Under Countertop	18" [450mm]


## Front View

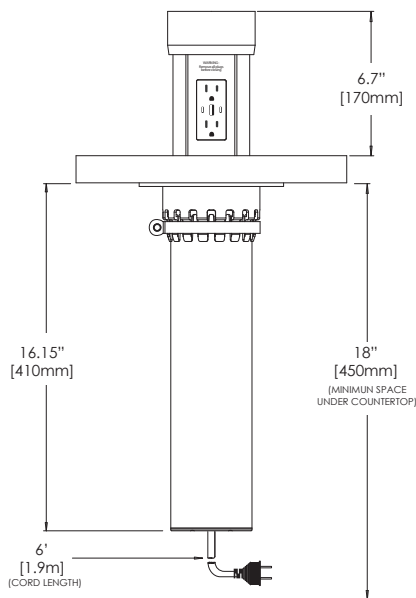

## Top View



## Cut Out Size

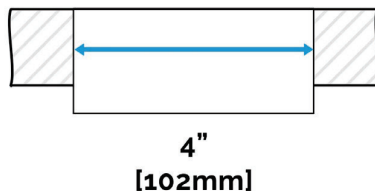

\*Ensure a flawless cutout with our [4" Hole Saw for Pop-Up Outlets](#) (not included)

## Outlet Specifications



(2) USB-C  
(PD - 30 Watt),  
(1) USB -A &  
(2) AC

AC: 15 amp @ 125V

USB-C (single port connected to PD device): 3 amps @ 9 VDC (30W)

USB-C (single port connected to non-PD device): 3 amps @ 5 VDC (15W)

USB-C (both ports connected): 3 amps @ 5 VDC (30W total power)

USB-A: 3 amps @ 5 VDC

## Electrical Certifications

- ETL Listed: UL 962A & CSA C22.2
- IP Rating: IP44
- For Indoor Use Only
- Complies with 2023 NEC Code 406.5E

## Ratings

- Water and Spill IP Rating: IP44 - Any water spilled will be diverted away from the Point Pod and drip into the cabinet below for ease of clean up.
- Dust IP Rating: None

## Resources & Downloads

Docking Drawer provides all of the necessary resources to plan a Point Pod Pop Up outlet installation.

- [Spec Sheet](#)
- [Video: How to Install a Point Pod Pop-Up](#)
- [Installation Manual](#)
- [Electrical Certifications](#)

## Ready to Order?

Source directly from Docking Drawer or from one of our distribution partners. [Learn more.](#)

Project  
Name:

Where to  
Source: ☐ Docking Drawer  
☐ Distributor

Warranty - 2 Years [Terms & Conditions](#)