


Installation Tool for Tight Spaces

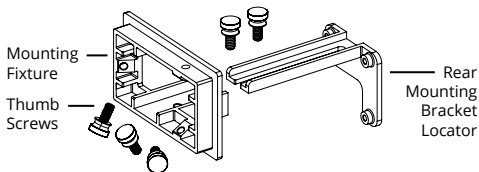

1 Assembly Instructions:

1. Insert 3 of the thumb screws into the pre-drilled holes on the mounting fixture.
2. Slide the rear mounting bracket locator into the back of the mounting fixture.
3. Insert 2 thumb screws into the locator arm.
4. Insert the Blade Series rear mounting bracket screws (included with the outlet) into the holes of the rear mounting bracket locator.

2 Installation Instructions:

1. Fully extend the rear mounting bracket locator and tighten the 2 thumb screws to secure it in place.
2. Locate the mounting fixture into the right side of the receptacle box cutout and tighten the thumb screws to lock the mounting fixture in position.
3. Firmly close the drawer box, which will press the sharp screws into the back wall of the cabinet, leaving precise indentations that mark the perfect spot to install the rear mounting bracket.
4. Remove the screws from the tool and install the rear mounting bracket of the in-drawer outlet at the marked locations using those same screws.

