


Brand	Root
	BDTSLC17... BDT17SLC...

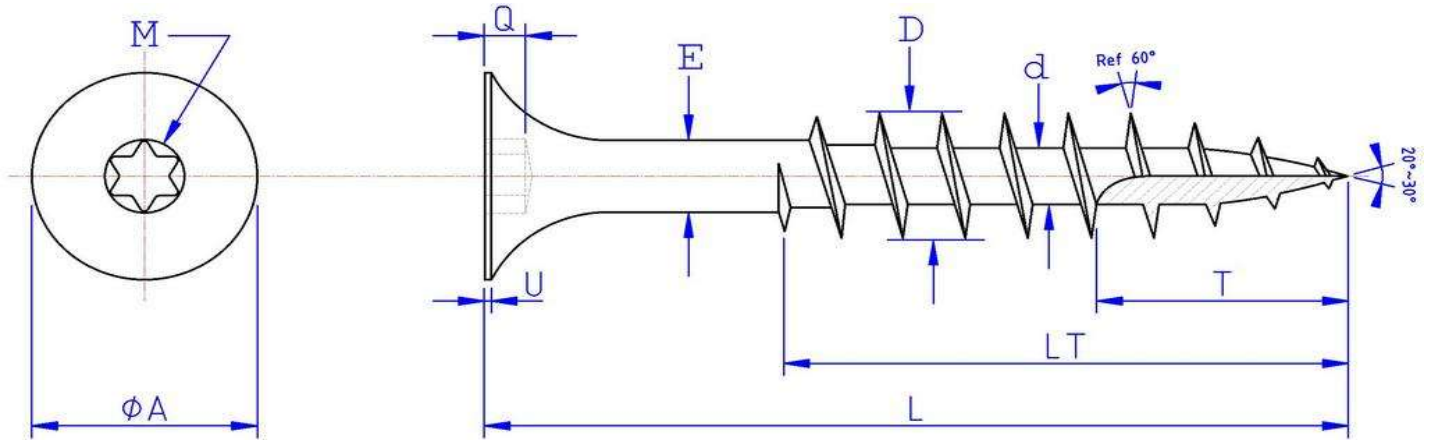

unit: INCH

L LENGTH TOLERANCE	>5/8" to ≤1-1/2"	+0	-0.05
	>1-1/2" to ≤2-3/4"	+0	-0.06
	>2-3/4"	+0	-0.09

LT THREAD LENGTH	<1"	Full Thread
	≥1" to <2-1/2"	2/3 Thread
	≥2-1/2"	1/2 Thread

SCREW SIZE	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	E BODY DIAM.	D THREAD DIAM.	d MINOR DIAM.	T POINT LENGTH	U THICKNESS	THREAD PER INCH	Min. Torsional Strength Lb/inch
# 8	T-20	Min	0.050	0.292	0.121	0.168	0.105	0.300	0.019	10	
		Max	0.065	0.332	0.126	0.179	0.113	0.375	0.032		
# 10	T-25	Min	0.055	0.340	0.142	0.194	0.116	0.300	0.019	9	
		Max	0.070	0.385	0.147	0.205	0.125	0.375	0.032		

Flat Bugle Head, Torx drive **Type VI**, Wood Screw Coarse Thread, **TYPE-17**
Stainless Steel (series 316L) Passivated

Root =

Bulk Label Description:

English: BUGLE HEAD, TORX, WOOD SCREW COARSE THREAD TYPE-17, STAINLESS STEEL
French: VIS À BOIS GROS FILET, TYPE-17, TÊTE TROMPETTE, TORX, ACIER INOXYDABLE
Spanish: TORNILLO PARA MADERA, ROSCA GRUESA TIPO-17, CABEZA DE TROMPETA, TORX, ACERO INOXIDABLE

Date: 19 novembre 2025

Done by: P.B.