


Brand	Root
	FTNSLC17...

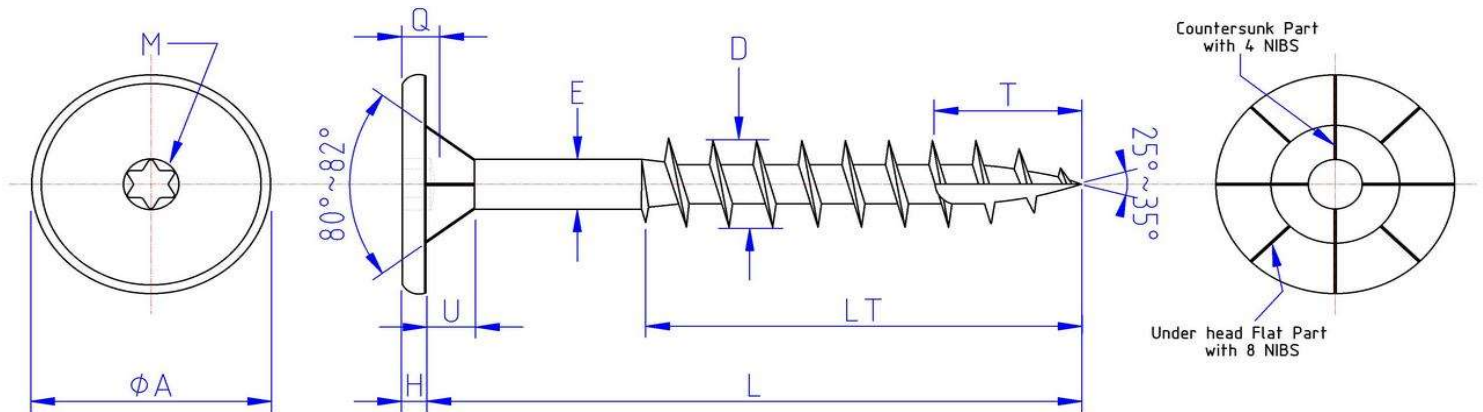

unit: INCH

L LENGTH TOLERANCE	> 5/8" to ≤ 1-1/2"	+ 0	- 0.05
	> 1-1/2" to ≤ 2-3/4"	+ 0	- 0.06
	> 2-3/4" to 5"	+ 0	- 0.09

LT THREAD LENGTH	2/3 Threaded
-------------------------------	---------------------

SCREW SIZE	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	H HEAD HEIGHT	U NECK HEIGHT	E BODY DIAM.	D THREAD DIAM.	T POINT LENGTH	THREAD PER INCH	Min. Torsional Strength Lb/Inch
# 10	T-25	Min	0.055	0.500	0.067	Ref. 0.100	0.137	0.194	0.300	8	
		Max	0.070	0.563	0.075		0.140	0.200	0.375		

Flat Top Head with Nibs, Torx drive **Type VI**, Wood Screw Coarse Thread, **Type-17**
Stainless Steel (series 316L) Passivated

Root= Flat Top Torx Stainless Low Carbon type 17

Bulk Label Description:

English: FLAT TOP HEAD WITH NIBS, TORX, COARSE THREAD, TYPE-17, STAINLESS STEEL
 French: TÊTE TOP PLATE AVEC NIBS, TORX, GROS FILET, TYPE-17, ACIER INOXYDABLE
 Spanish: CABEZA PLANA AUTORROSCANTE, TORX, ROSCA GRUESA, TIPO 17, ACERO INOXIDABLE

Date : 20 mai 2025

Done by : **P.B.**