
CABINET DIMENSIONS
DIMENSIONS DU CABINET

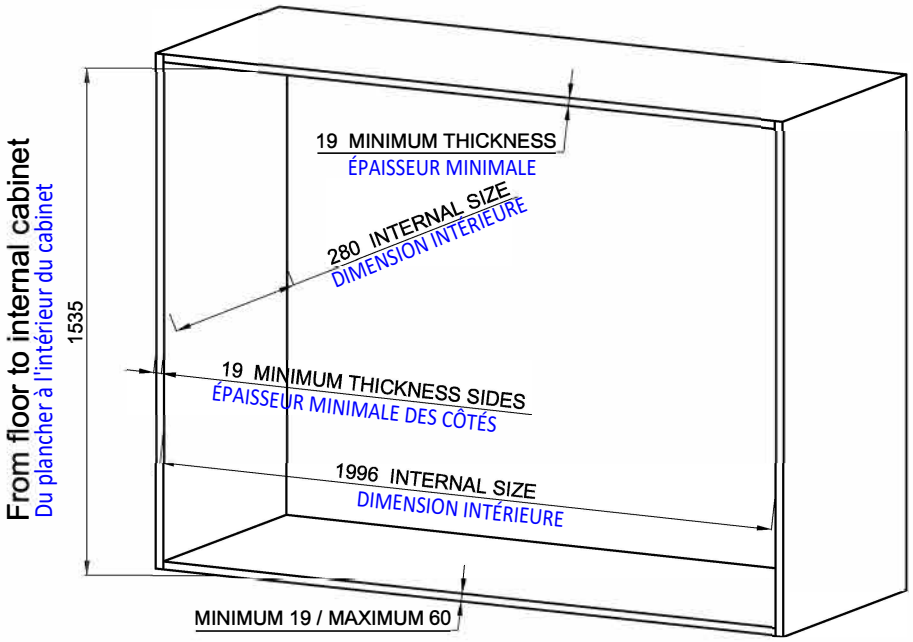

EXEMPLE AVEC MATELAS 180 MM D'ÉPAISSEUR


Si l'épaisseur du matelas diffère de l'exemple:
- X (hauteur de votre matelas) - 180 mm= Y
- Nouvelle profondeur du cabinet= 280 mm + Y
- Si l'épaisseur du matelas > 305 mm SVP contacter le service à la clientèle


EXAMPLE with mattress 180mm

if change the mattress thickness:

- X (your mattress height) - 180mm = Y
- new depth cabinet = 280mm + Y
- if mattress thikness > 305mm contact customer service

HOLES ON SIDE PANEL FOR METAL PLATES
TROUS SUR LE PANNEAU LATÉRAL POUR LES PLAQUES EN MÉTAL

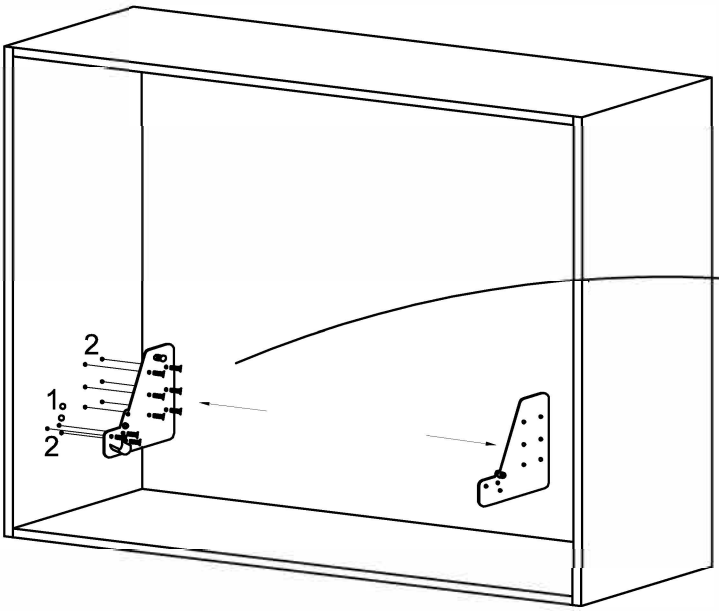

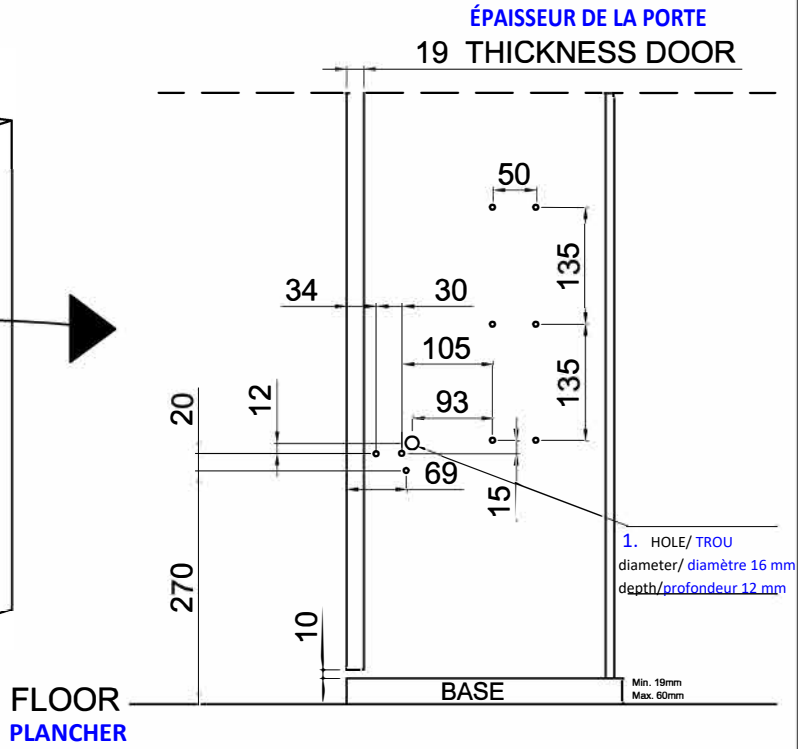

1 HOLE/TROU Ø 16mm DEPTH/PROFONDEUR 12mm


2 COMPASS 6MA
HOLES/TROUS Ø 8mm DEPTH/PROFONDEUR 17mm

Page	Sizes	Date
Page 1 of 3	mm	
	Article	
	ART. 8410014	

HOLES AND DIMENSIONS OF FRONT PANEL

TROUS ET DIMENSIONS DU PANNEAU AVANT

SIDE VIEW
VUE DE CÔTÉ

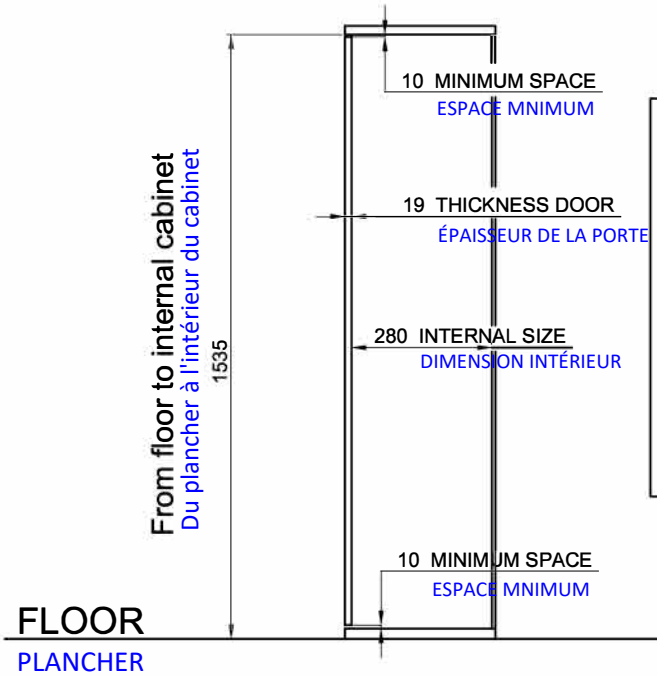


FRONT PANEL DIMENSION


As the thickness of base of cabinet can be from 19mm to 60mm, YOU NEED TO DETERMINATE the door dimension as follow:

1535 minus 10, minus 10 (minimum space) minus thickness of your cabinet base

DIMENSION DU PANNEAU AVANT

Comme l'épaisseur de la base du cabinet peut varier de 19 mm à 60 mm, VOUS DEVEZ DÉTERMINER la dimension de la porte comme suit:
1535 moins 10, moins 10 (espace minimum) moins l'épaisseur de la base de votre cabinet

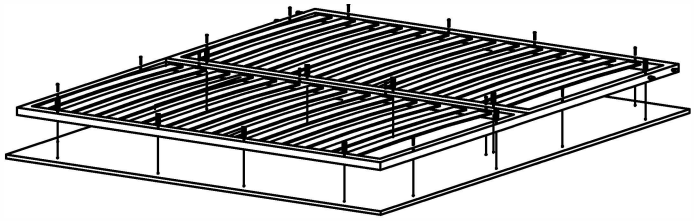

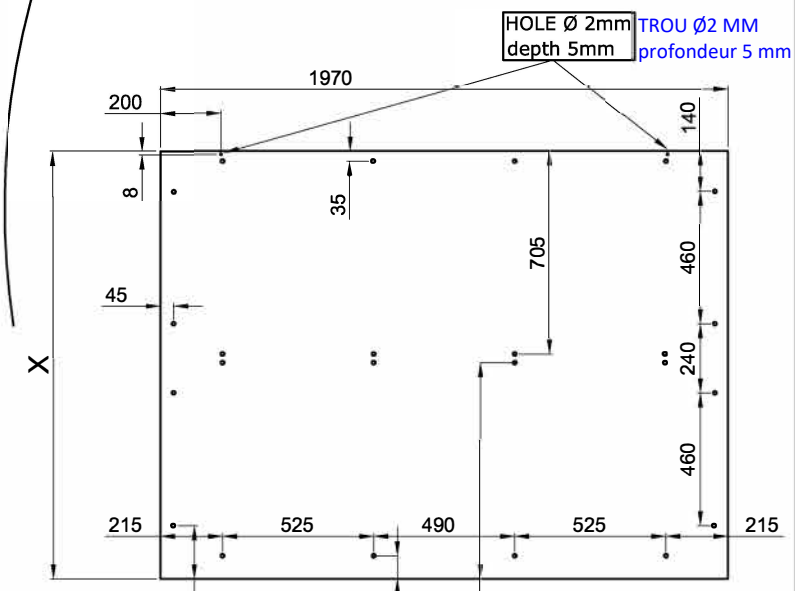

215 DETRACT DIMENSION BASE CABINET
DIMINUER LA DIMENSION DE LA BASE DU CABINET

110 DETRACT DIMENSION BASE CABINET
DIMINUER LA DIMENSION DE LA BASE DU CABINET


780 DETRACT DIMENSION BASE CABINET
DIMINUER LA DIMENSION DE LA BASE DU CABINET


TROU/ COMPASS 6MA
HOLE Ø 8mm
depth 17mm
profondeur

Page	Sizes	Date
Page 2 of 3	mm	
	Article	
	ARTG. 8410014	

TUBE 20x20 and MAGNETS

TUBE 20 X 20 ET AIMANTS

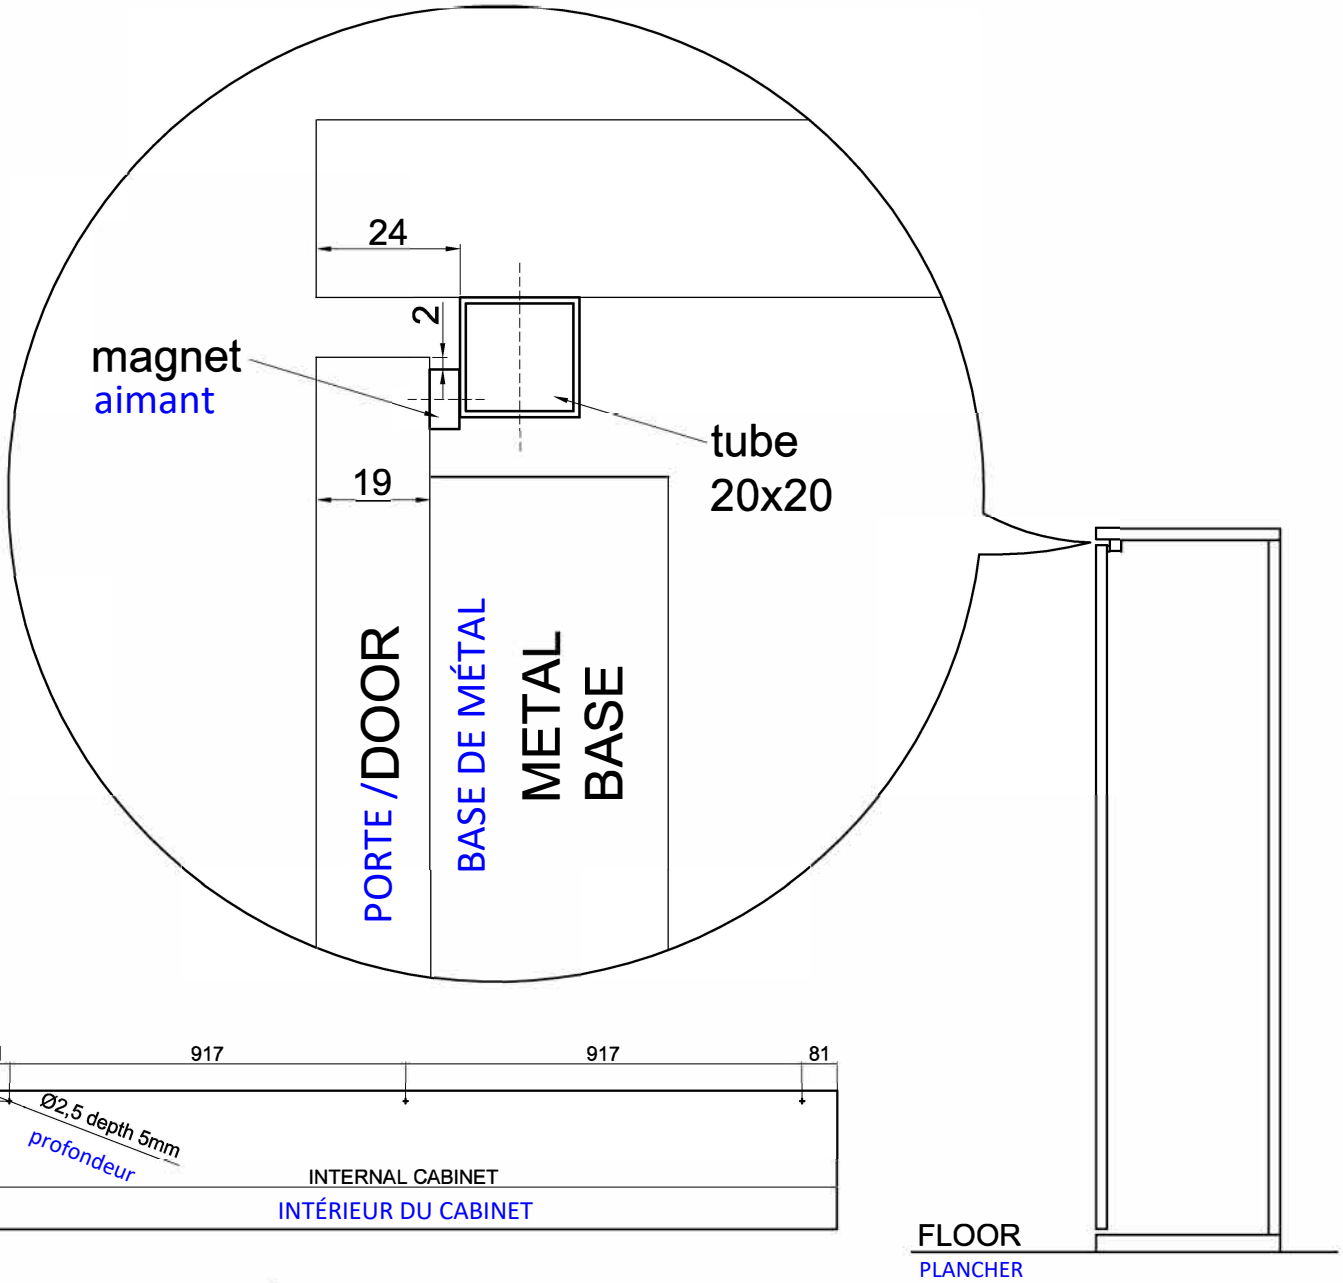

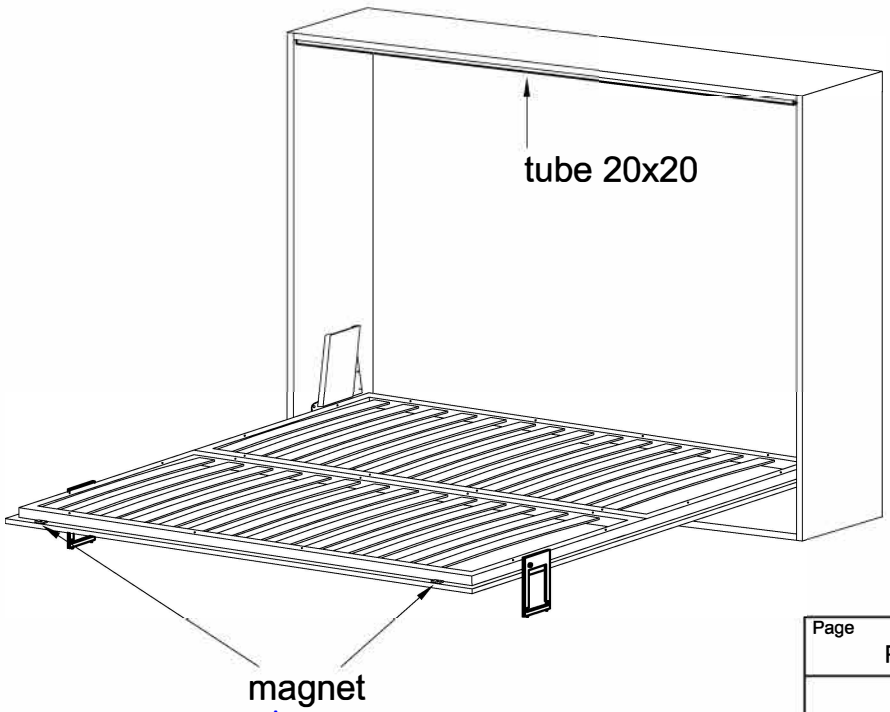

Page	Sizes	Date
Page 3 of 3	mm	
	Article	
	ART. 8410014	