IVES

The ARTISAN Collection

Congratulations! You have selected a beautiful, finely crafted, solid brass product that will enhance the beauty of your home for years to come. Since 1868, H.B. Ives quality hardware has helped build the most distinguished homes in America.


FLUSH BOLT

FOR USE ON WOOD DOUBLE DOORS
TO SECURE INACTIVE DOOR.

INSTALLATION INSTRUCTIONS

TOOLS REQUIRED: Drill, 5/8" and 9/32" drill bits, hammer, small chisel and Phillips screwdriver.


1. Position template on top or bottom center of door edge.
2. Outline and mortise (A) 1/16" deep.
3. Using template, mark screw holes and with the 9/32" drill bit, drill pilot holes.
4. Outline section B, mortise 1/4" deep, and secure bolt.
5. Rub chalk on end of bolt, close door and push lever up to mark strike hole position.
6. Outline strike plate, mortise area 1/16" deep, drill strike hole (C) 1" deep with 5/8" bit.
7. Position strike and mark screw holes,with the 9/32" drill bit, drill pilot holes, align strike and secure.

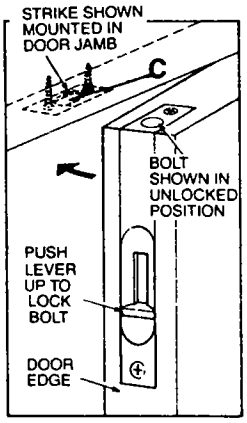

MAINTENANCE INSTRUCTIONS

H. B. Ives Solid Brass products have a clear, protective lacquer coating which helps prevent discoloration. Do not use abrasive waxes or cleaners.

ASK FOR OTHER FINE DECORATIVE HARDWARE BY H.B. IVES



0 44074 05157 5

FLUSH BOLT C266B3 BRT

MADE IN U.S.A.

TEMPLATE

