IVES

56 DUTCH DOOR QUADRANT

Installation Instructions

DUTCH DOOR QUADRANT


FOR USE ON DUTCH DOORS. Provides easy, positive latching of doors. Holds its position — Heavy spring washer provides constant tension. NON-HANDED Quadrant may be installed on either left or right hand opening doors.

INSTALLATION INSTRUCTIONS

TOOLS REQUIRED Drill, 1/8" drill bit for pilot holes, Phillips screwdriver and pencil.

1. Position Quadrant (as shown in illustration) and measure 1-3/16" down from point where doors meet. Mark screw holes of Quadrant plate, drill and secure.
2. Measure up vertically 2-5/16" from center of top screw holes of Quadrant plate and mark centers of bottom screw holes of knob plate.
3. Holding knob plate in place, swing Quadrant into lock position and check alignment. Drill and secure.


NOTE: When door is locked, it is important that top section of door be locked to side jamb for added security. Recommended use of IVES C-054 OR C55 DUTCH DOOR BOLTS.

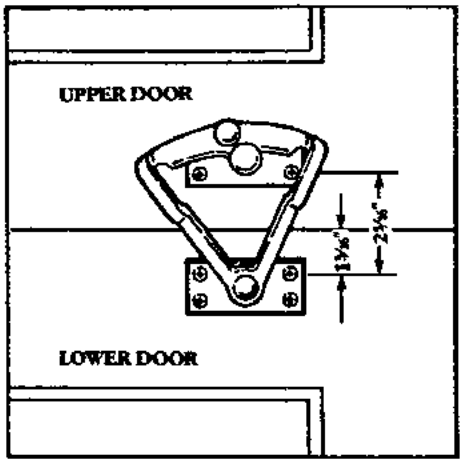

MAINTENANCE INSTRUCTIONS

H.B. Ives Solid Brass products have a clear, protective lacquer coating which helps prevent discoloration. Do not use abrasive waxes or cleaners.


ASK FOR OTHER FINE DECORATIVE HARDWARE BY H.B. IVES

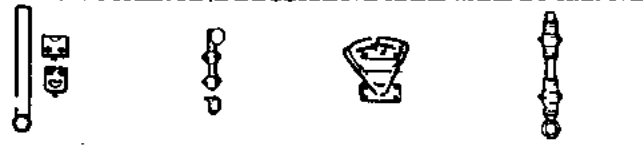

SURFACE BOLTS | DUTCH DOOR BOLTS | DUTCH DOOR QUADRANT | DELUXE SURFACE BOLTS



This illustration shows the Ives non-handed Dutch Door Quadrant properly applied. When the door is locked it is important that the top section be locked to the side jamb with a suitable dead bolt for added security and to prevent undue stress on the Quadrant.

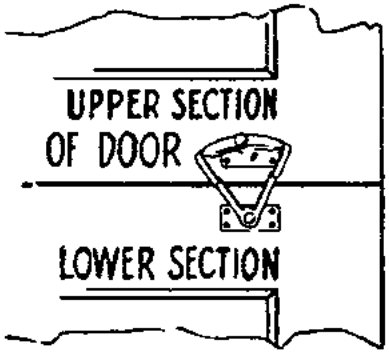

P.N. 127972

ALLEGION

Customer Service

1-877-671-7011 www.allegion.com/us

© Allegion 2015
Printed in U.S.A.
C56B3 Rev. 05/15-b