
392-7 (PULL BELOW CENTER)
FOR NL, TL OR DT APPLICATIONS

DRILL ¼" DIA. C'SINK TO 82° FOR 88 & 55 SERIES DEVICE
DRILL ¼" DIA. THRU FOR 99 SERIES DEVICES
SCREW THRU BOLT TO 99 DEVICE CHASSIS


DEVICE APPLICATION SCHEDULE	DIM. "A"
98/99 SERIES RIM	3½"
XP98/XP99 SERIES RIM	3½"
98/9927 SERIES SURFACE VERTICAL	3½"
98/9975 SERIES MORTISE	3½"
88 SERIES RIM	3 11/16"
8827 SERIES SURFACE VERTICAL	3 11/16"
8875 SERIES MORTISE	3 11/16"
55 SERIES RIM	13/16"

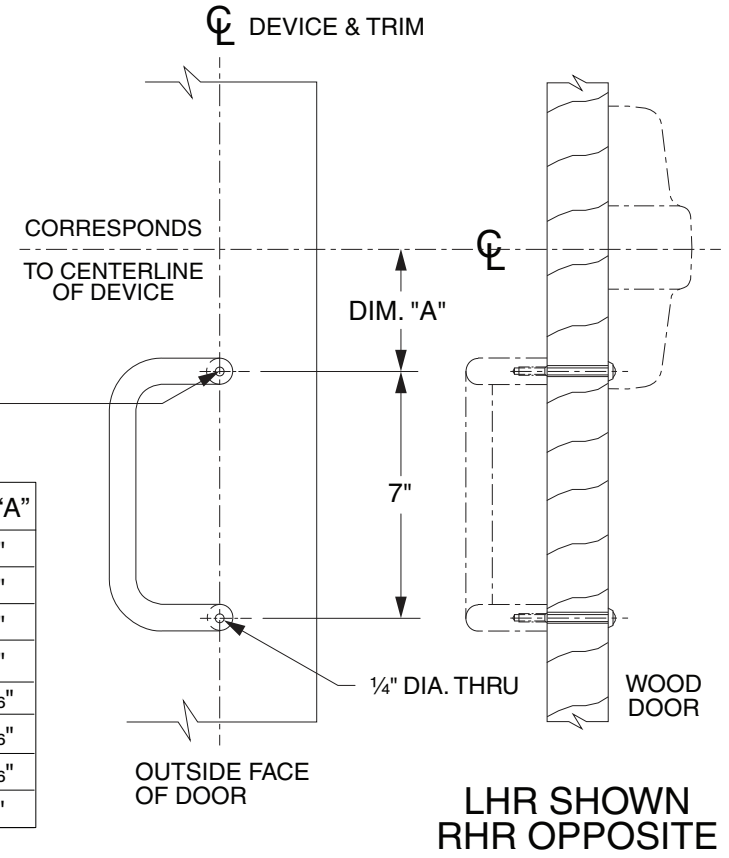

LHR SHOWN
RHR OPPOSITE

392-7 (PULL ON CENTER)
FOR NL, TL OR DT APPLICATIONS

DEVICE APPLICATION SCHEDULE
98/99 SERIES RIM (DT OR NL)
XP98/XP99 SERIES RIM (DT OR NL)
98/9927 SERIES SURFACE VERTICAL (DT OR TL)
98/9975 SERIES MORTISE (DT OR NL)
98/9947WDC SERIES CONCEALED VERTICAL (DT OR TL)
98/9949WDC SERIES CONCEALED VERTICAL (DT OR TL)

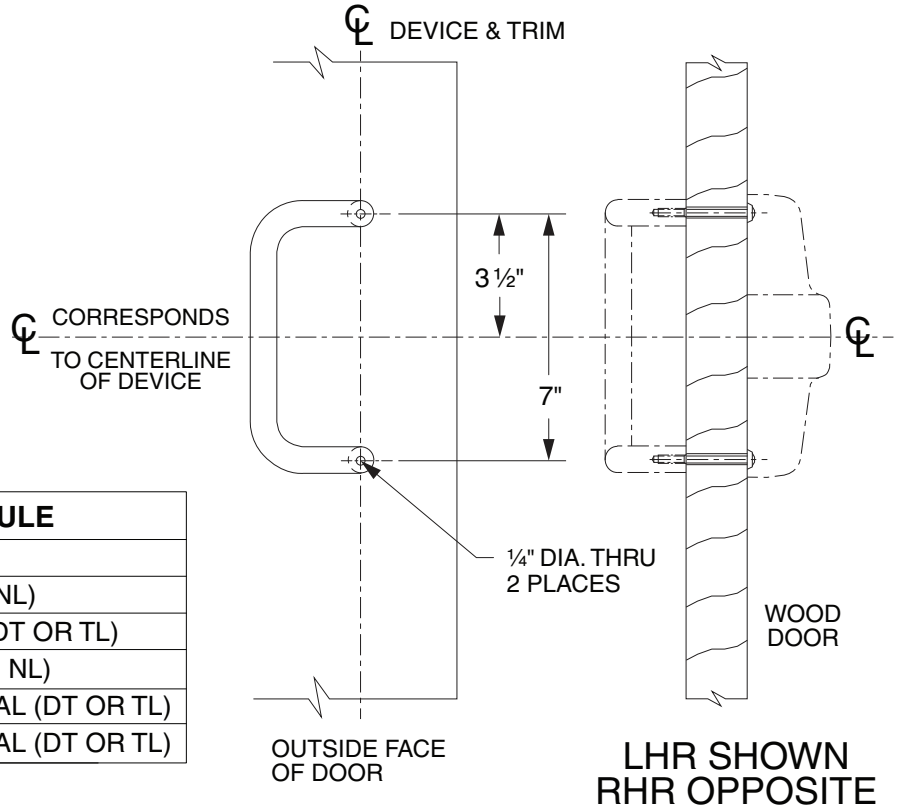

LHR SHOWN
RHR OPPOSITE

392-7 Pull

VON DUPRIN®

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER: W20447_c

DATE: 05-31-13