1490 / 2490 Spacesaver® Bolt Locks



The Spacesaver®

Extra Narrow

Fully concealed and easily installed in 1.5" (38.1mm) frame or door stile

The Spacesaver®, first designed and patented by SDC, is a fundamental innovation in electric locking technology for access control applications.

The stainless steel bolt projects at right angles to the lock mechanism, allowing installation of Spacesaver® locks, by means of a simple cutout, in virtually any standard 1.5" frame, or in most door lock stiles. With the entire lock concealed, esthetic acceptability is complete, security is greater and installation in old or new construction is fast, easy and economical.

Stainless Steel Bolt


Greater security is provided by the .625" (1.6cm) diameter stainless steel bolt. The bolt rotates freely, making attempts to tamper or cut extremely difficult.

Specification Grade Solenoids

All Spacesaver® lock solenoids are manufactured by SDC to precision specifications. SDC solenoids are capable of superior overall performance in both force and longevity, providing years of service.

Installation

SDC Spacesaver® locks may be mounted in the frame header, side jamb or door lock stile.



Field Adjustable Auto-Relock Switch

The automatic relock switch keeps the bolt retracted while the door is open. The door depresses the ball switch assembly on closure, causing the bolt to project automatically locking the door. In addition, the ball switch assembly is bi-directional, permitting the locks to be used on swinging and sliding doors.




Fig. 1




Fig. 2

The auto relock assembly is field adjustable to compensate for wide door gap. (See Figure 1 & 2.)

1490A Failsafe

The 1490A is locked when energized. Recommended for safety applications. It is intended that the door unlock automatically when power is interrupted by the access control, power failure or signal from a fire life safety system.

- Bolt Throw 1/2" (12.7mm)

2490A Failsecure

The 2490A is locked when de-energized and unlocked when energized. Recommended for security applications only, it is intended that the door automatically locks when power is interrupted by the access control or power failure.

- Bolt Throw 1/2" (12.7mm)

Protected by one or more of the following U.S. Patents:
4,021,065 4,099,752
4,634,155

5 YEAR LIMITED WARRANTY

Figure 3A, 3B, 3C, 3D: Typical Frame Header or Side Jamb Installation


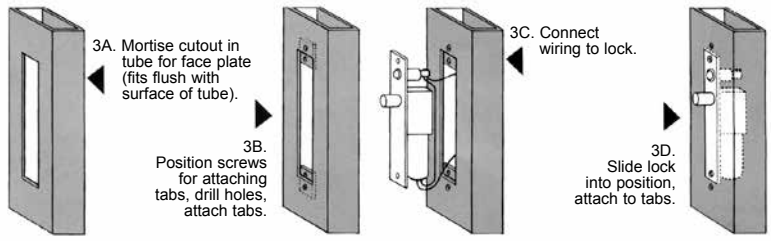


Figure 4: End View



Model

1490AI Failsafe, 12/24VDC
2490AH Failsecure, 12/24VDC

Finish

V 628 Clear Anodized Aluminum (std)

Special finishes:

C 605 Bright Brass
D 606 Dull Brass
F 611 Bright Bronze
G 612 Dull Bronze
H 613 Oil Rubbed Bronze
P 625 Bright Chrome
Q 626 Dull Chrome
U 630 Satin Stainless Steel
Y 335 Black Anodized

Options

Bolt and Door Status
Door and lock status monitoring sensors are installed and concealed in the lock. The need for additional door and frame preparations is eliminated. Magnetic bolt status sensor is behind the faceplate to inhibit tampering.

Applications include: Remote Door and Lock Status; Mantraps; Air/Clean Rooms; Communicating Bathrooms; Door Hold Open Alarms and CCTV Activation.

B Magnetic Bolt Status Switch
SPDT 0.25 Amp @ 30VDC
Indicates bolt locked and bolt unlocked.

D Mechanical Door Position Switch
SPDT 5 Amps @ 30VDC
Integral to the auto relock ball switch assembly. Indicates, door closed and door open. Recommended for minimum security applications only

AC Operation
BR64XL Rectifier for AC operation

Specifications

Face Plate: 8"L x 1-1/4"W x 1/8"D (203.2 x 31.75 x 3.175mm)

Strike: 4"L x 1-1/2"W x 1/8"D (101.6 x 38.1 x 3.175mm)

Frame Inner Dimension Requirements: 8"L x 1-1/4"W x 1-3/8"D *(See figure 4)* (203.2 x 31.75 x 31.75mm)

Bolt Material: Stainless Steel

Bolt Diameter: 5/8" (15.875mm)

Bolt Throw: 1/2" (12.7mm)

Mounting Tabs: Two aluminum mounting tabs are provided for easy lock installation. *See figure 3B.*

1490 Failsafe
0.45 Amp @ 24VDC Continuous Duty
0.9 Amp @ 12VDC Continuous Duty

2490 Failsecure
0.45 Amp @ 24VDC Continuous Duty
0.9 Amp @ 12VDC Continuous Duty

www.sdcsecurity.com service@sdcsecurity.com
[t] 800.413.8783 805.494.0622 [f] 805.494.8861
801 Avenida Acaso, Camarillo CA 93012 • PO Box 3670, Camarillo CA 93011-3670
© 2012 Security Door Controls