

1560 Series Electromagnetic Door Holders

Holders & Stops


SARGENT®
ASSA ABLOY

Electromagnetic Door Holder



- Designed for use with self-closing fire and smoke barrier doors
- Use independently or with any fire or smoke detector system
- When de-activated, helps control the spread of fire and smoke by automatically releasing doors from an open position for simultaneous closing
- Fail-safe device: When electrical power fails, doors will release to close automatically
- Conforms to devices outlined in National Fire Protection Agency Standards Nos. 80 and 101
- Designed to work with SARGENT door closers
- Recommended vertical location is on top rail of door – within 6" of lock stile edge
- When applications will not allow wall or floor magnets, consult SARGENT's FireGuard catalog for our line of Electronic Closer Holders
- Fits standard outlet box
- Holding force – 35 lbs typical
- Voltage and Current:
120 VAC, 60 Hz., .020 amp
24 VAC/DC, 60 Hz., .020 amp
12 VDC, .040 amp
- Finish – EN
- Meets ANSI/BHMA A156.15
- UL Listed to U.S. and Canadian safety standards
- 1" (25mm) extension p/n 52-2573 included standard to increase armature projection to 2-5/8" (67mm)
- Order as:
1561 for Flush Mount
1560 for Surface Mount
1562 for Single Floor Mount
1563 for Double Floor Mount

Wall Mount

1561 Flush Mount




1560 Surface Mount

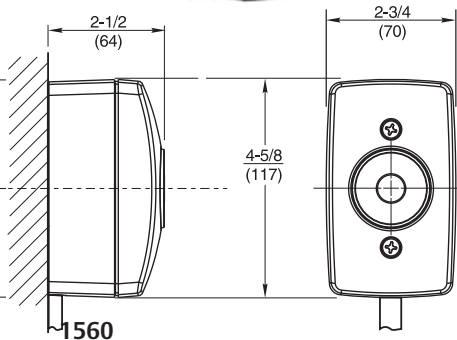


Floor Mount

1562 Single Floor Mount



1563 Double Floor Mount

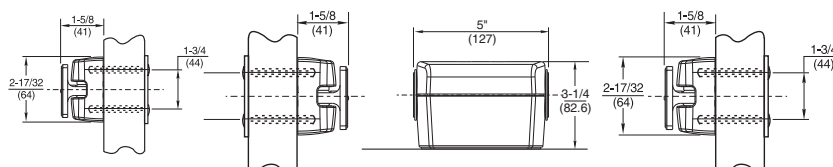

1562

1563