
DIMENSIONS

INCHES
MILLIMETERS


Nominal, subject to tolerance extremes.

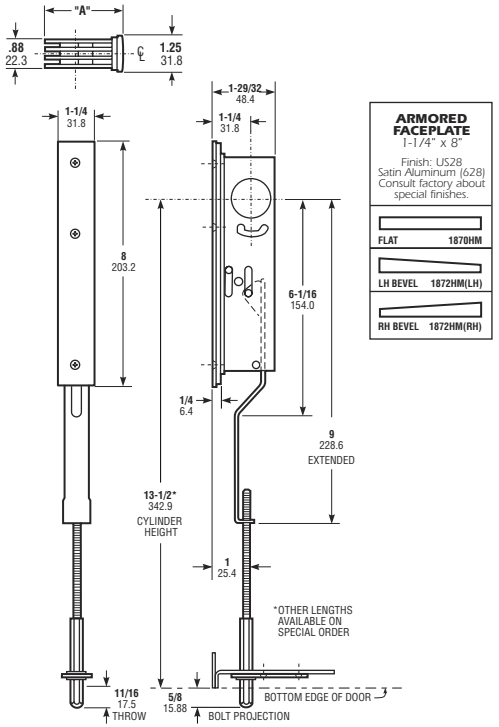

ARMORED FACEPLATE
1-1/4" x 8"

Finish: US28
Satin Aluminum (628)
Consult factory about special finishes.


FLAT	1870HM
LH BEVEL	1872HM(LH)
RH BEVEL	1872HM(RH)



Cylinder Cam


1870HM Series locks are operable by any standard 1-5/32" diameter mortise cylinder with special MS® cam dimensioned as shown. Cylinders with MS® cams can be readily obtained from most cylinder manufacturers. See page SW-28 for cylinder make and trim ring information.


INSTALLATION



Door Preparation

FOR INSTALLATION LOCKING THRESHOLD
INVERT FOR HEADER LOCKING

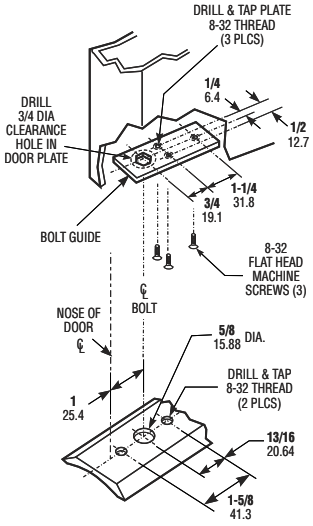

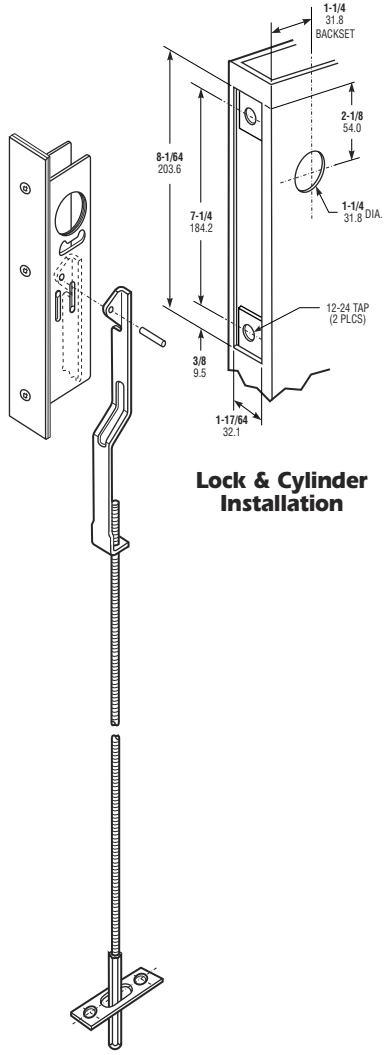

Lock & Cylinder Installation

ADAMS RITE MANUFACTURING CO.
260 Santa Fe Street, Pomona, CA 91767
Phone: (909) 632-2300 Fax: (909) 632-2369

1870 HM Series Cylinder Operated Flushbolt