229 Recessed ANSI Switch Set




- U.L. Listed
- Optimum Concealment Application
- One Inch Gap on S.P.D.T.
- 36" Jacketed Cable Lead, Custom Length Available
- Covert Installation Enhances Resistance to Tampering or Compromise

RECESSED ANSI SWITCH

- U.L. Listed
- Optimum Concealment Application
- One Inch Gap On S.P.D.T.
- 36" Jacketed Cable Lead, Custom Lengths Available
- Easy Install Replaces standard ANSI Stainless Steel Door Plate
- Covert Installation Enhances Resistance To Tampering Or Compromise



229

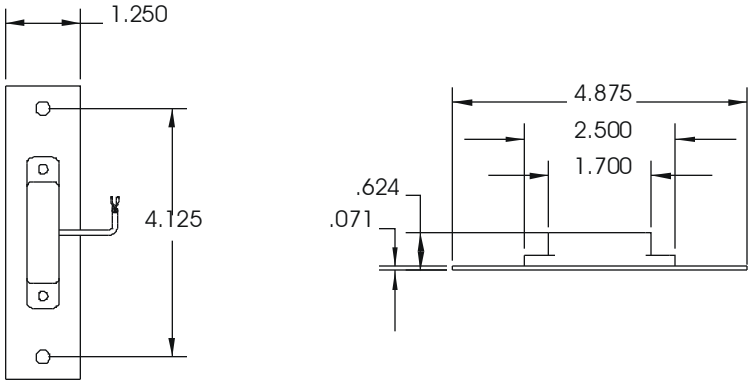

GRI products meet or exceed these minimum general specifications:

PART NUMBER	LOOP TYPE	ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE (Ω)	MAXIMUM CONTACT RATING (W)	MAXIMUM SWITCHING VOLTAGE (VDC)	MAXIMUM SWITCHING CURRENT (A)
229	Open/Closed	SPDT	C	.140	5	175 VDC	.250
229PD	Open/Closed	DPDT	C	.140	5	175 VDC	.250

WARRANTY:
Lifetime warranty against workmanship, material and factory defects.

GEORGE RISK INDUSTRIES, INC.
G.R.I. PLAZA
KIMBALL, NE 69145

MADE IN U.S.A.

TOLL-FREE 1-800-445-5218
TOLL-FREE 1-800-523-1227
(308) 235-4645
FAX (308) 235-3561
E-MAIL: grisales@megavision.com
WEB SITE: www.grisk.com

BA-200 Rev. E 9/20/2011