
Folger Adam 310-4 Electric Strike

Works with Pullman style latchbolts up to 3/4" and Squarebolt® style rim exit devices

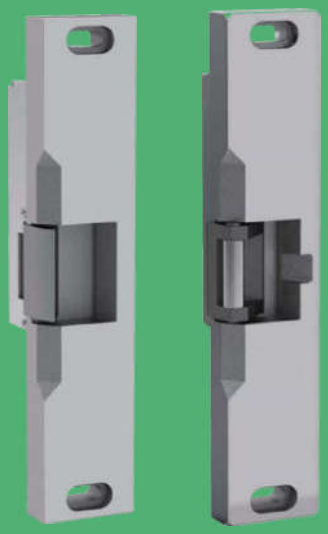

310-4 310-4S

The 310-4 is a 3-hour fire rated, industrial grade electric strike designed for extreme heavy duty applications.

The all stainless steel construction of this device makes it ideal for high abuse applications that would disable other electric strikes. The Folger Adam 310-4 Series has a unique 3/4" face plate with an integrated 1/4" base shim that can be removed in the field to accommodate rim exit devices with a 1/2" or 3/4" throw latchbolt.

Features

Standard Features

- Integrated shim for quick customization of faceplate thickness (1/2" to 3/4" [19mm])
- Tamper resistant, heavy duty construction
- Constructed entirely of stainless steel for strength and corrosion resistance
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs
- Endurance rating 1 million cycles
- Integrated ramps for better deadlatch handling
- Set screws for horizontal lockdown
- In-frame horizontal adjustability
- Wider faceplate for greater versatility
- Non-handed
- Fail secure (standard)
- Plug-in connector
- SecuriCare five-year, no-fault, no questions asked warranty *(Addition of SMART Pac® III extends the warranty to 10 years)*

Optional Features

- **Fail Safe**
- **LCBMA** Latchbolt & Locking Cam Monitor with Auxiliary Switch

Accessories

- **7000-SMB** Surface mounting box
- **2001-1** Wire-in bridge rectifier
- **2001M** Plug-in bridge rectifier
- **2004M** ElectroLynx® adapter
- **2005M3** SMART Pac® III
- **2006M** Plug-in buzzer

UL CERTIFIED

Grade 1 | SecuriCare 5 Year Warranty | Rim Exit Devices | Fire Rated | Burglary Rated

Folger Adam 310-4 Electric Strike

Specifications

Certifications

- UL 10C, 3-hour fire rated (fail secure only)
- CAN4-S104 (ULC-S104) fire door conformant
- UL 1034, burglary-resistant listed
- UL 294 listed
- ANSI/BHMA A156.31, Grade 1
- NFPA-252 fire door conformant
- ASTM-E152 fire door conformant
- RoHS compliant

Electrical (Continuous Duty)

- 510 mA at 12 VDC/250 mA at 24 VDC

310-4

For up to 3/4" [19mm] Pullman style latchbolts on single doors

PK keeper standard


310-4S

For Squarebolt® style rim exit devices such as;

- Corbin Russwin® ED4200S, ED5200S and ED5200SA SecureBolt®
- Yale® 7150(F), 7250, 7270M(F) Squarebolt® Exit Devices

SK keeper standard

Dimensions *Model 310-4 shown*

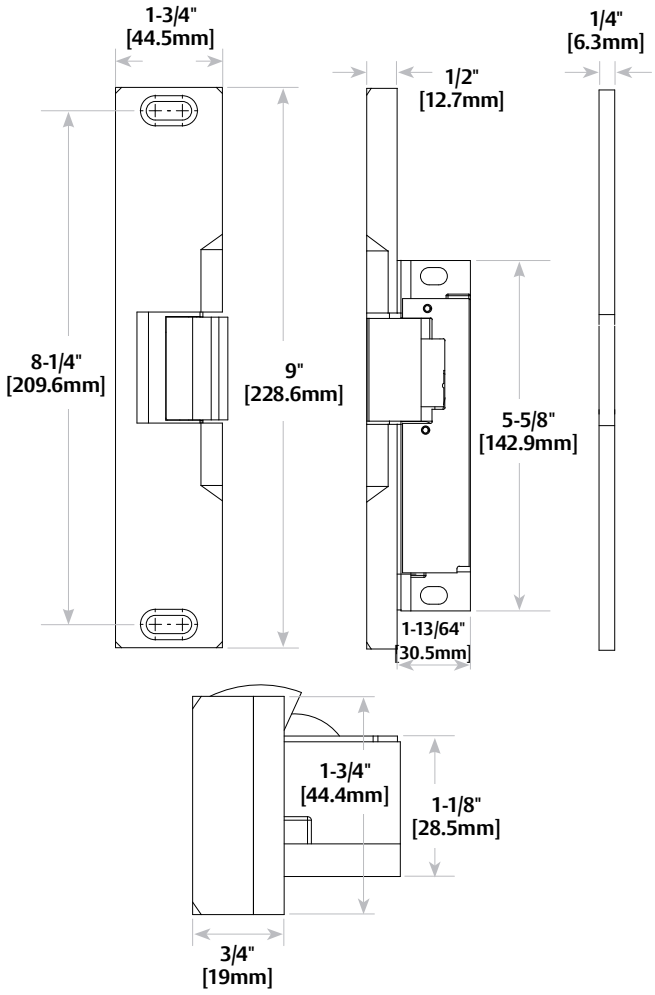

How to Order

SERIES	FAIL SECURE / SAFE	VOLTAGE	FINISH	OPTION (S)
310-4 (S)	– F	– 12D	– 605	– LCBMA
COMPLETE PACS	**(blank)** Fail Secure (standard)	**12D** 12 Volt	**605** Bright Brass	**(blank)** No Monitor
310-4 PK keeper standard; For use with 3/4" Pullman style latchbolts	**F** Fail Safe	**24D** 24 Volt	**606** Satin Brass	**LCBMA*** Latchbolt & locking cam monitor with auxiliary switch
310-4(S) SK keeper standard; For use with Squarebolt® style rim exit devices			**612** Satin Bronze	
			613 Bronze Toned	
			629 Bright Stainless Steel	
			630 Satin Stainless Steel	

PREFIX	SERIES	KEEPER STYLE	FINISH
FP	– 310-4	(SK)	– 605
FACEPLATE ONLY		**SK** For use with Squarebolt® style rim exit devices	**605** Bright Brass
FP Faceplate	**310-4** PK keeper standard; For use with 3/4" Pullman style latchbolts		**606** Satin Brass
	310-4(S) SK keeper standard; For use with Squarebolt® style rim exit devices		**612** Satin Bronze
			613 Bronze Toned
			629 Bright Stainless Steel
			630 Satin Stainless Steel

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.

Updated 9/28/22 Patent pending and/or patent www.assaabloydss.com/patents
Copyright © 2022, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited.