
Dead Latch
451


INSTALLATION

Door and Frame Installation

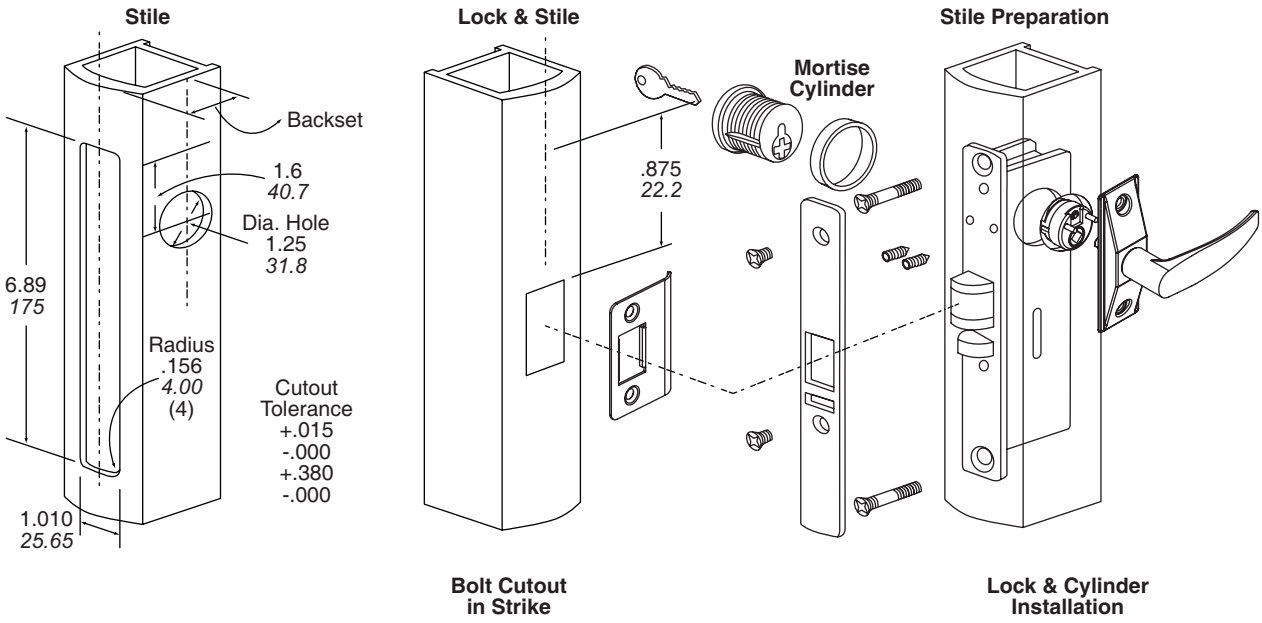


DIMENSIONS


Inches
Millimeters

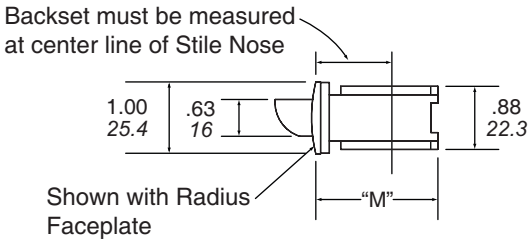

Backset	"M"
31/32" *24.6*	1.63" *41.4*
1-1/8" *28.6*	1.79" *45.5*
1-1/2" *38.1*	2.14" *54.36*

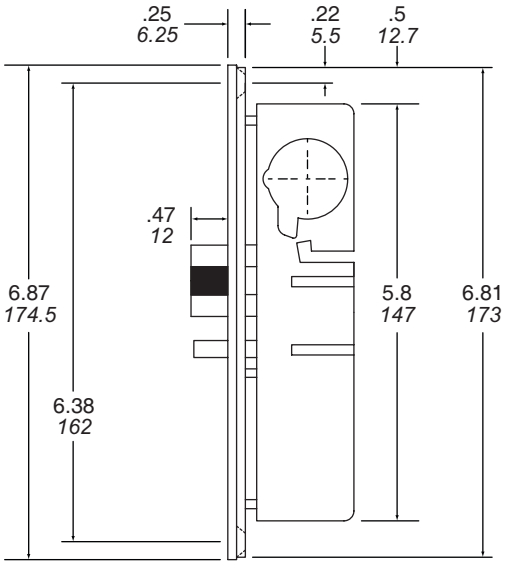


Cylinder Cam



Cam Tolerance	± .005 ± .13

These locks are operable by any standard 1-5/32" diameter mortise cylinder with cam dimensions as shown.

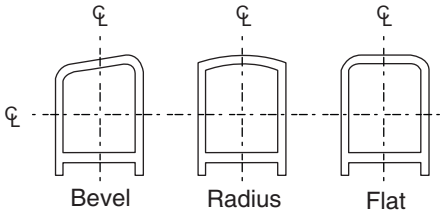


400 Jeffreys Rd., Rocky Mount, NC 27804 • Tel.: (252) 446-3321 • Fax: (252) 446-4702 • www.kaba-ilco.com

Pestillo
451

INSTALACIÓN

Marcos y puertas

Perfil

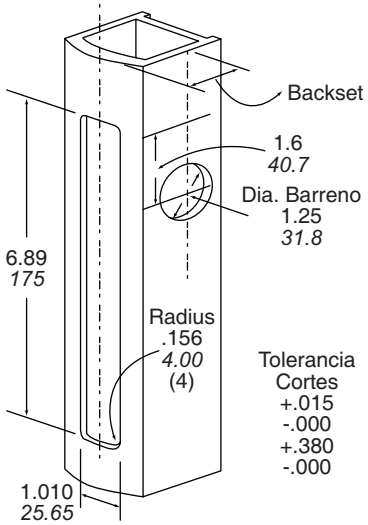


Corte de Contra


DIMENSIONES

Pulgadas
Milímetros

Cerradura y Perfil

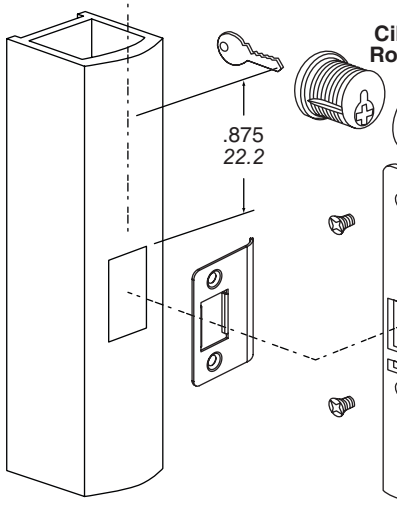


Preparación Perfil

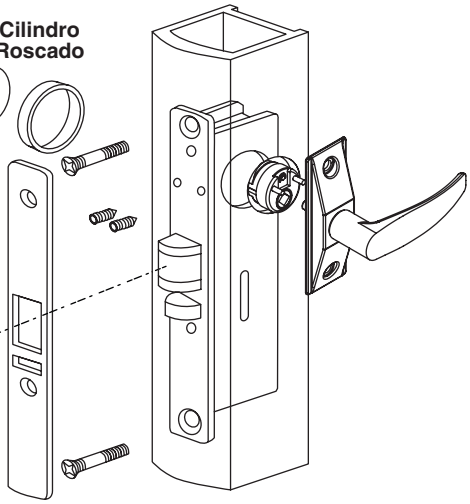


Instalación cerradura y cilindro

DIMENSIONES


Pulgadas
Milímetros

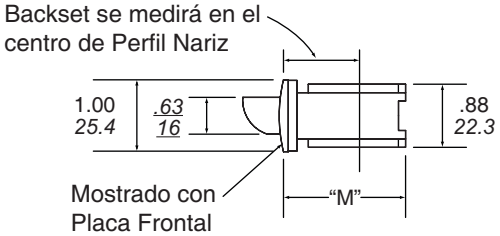

Backset	"M"
31/32" *24.6*	1.63" *41.4*
1-1/8" *28.6*	1.79" *45.5*
1-1/2" *38.1*	2.14" *54.36*

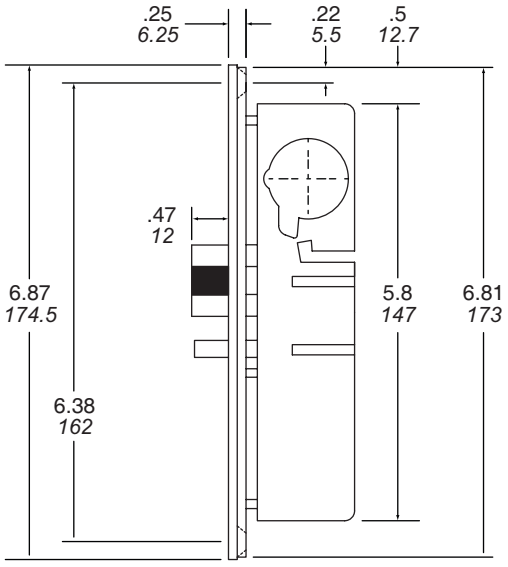


Leva del Cilindro



Tolerancia	± .005
de Leva	± .13

Estas cerraduras funcionan con cualquier cilindro roscado standard de 1-5/32" con leva con las dimensiones como se muestra

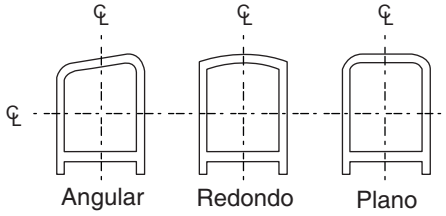

400 Jeffreys Rd., Rocky Mount, NC 27804 • Tel.: (252) 446-3321 • Fax: (252) 446-4702 • www.kaba-ilco.com